

Testking.640-864.222 questions

Number: 640-864
Passing Score: 800
Time Limit: 120 min
File Version: 31.5



<http://www.gratisexam.com/>



640-864

Designing for Cisco Internetwork Solutions Exam

- ✓ Best stuff I have ever used for my exam preparation. I love Exam collection guys.
- ✓ Created Questions into Sections, now we can learn by Sections with this help.
- ✓ These are the most accurate study questions. Just focus on these and sit in your exam.
- ✓ Modified few questions, fixed few spelling mistakes and types.

<http://www.gratisexam.com/>



Many new questions are added, Good for review go ahead and pass the exam now.

Sections

1. Describe the Methodology used to design a network
2. Describe network structure and modularity
3. Design Basic Enterprise Campus Networks
4. Design Enterprise Edge and Remote Network Modules
5. Design IP Addressing and Routing Protocols
6. Design network services

Exam A

QUESTION 1

What is the acceptable amount of one-way network delay for voice and video applications?

- A. 300 bytes
- B. 1 sec
- C. 150 ms
- D. 500 ms

Correct Answer: C

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

Delay Components in VoIP Networks

The ITU's G.114 recommendation specifies that the one-way delay between endpoints should not exceed 150 ms to be acceptable, commercial voice quality. In private networks, somewhat longer delays might be acceptable for economic reasons. The ITU G.114 recommendation specifies that 151- ms to 400-ms one-way delay might be acceptable provided that organizations are aware that the transmission time will affect the quality of user applications. One-way delays of above 400 ms are unacceptable for general network planning purposes.

QUESTION 2

Which of the following three options represents the components of the Teleworker Solution? (Choose three.)

- A. Cisco Unified IP Phone
- B. Cisco 880 Series Router
- C. Aironet Office Extend Access Point
- D. Catalyst 3560 Series Switch
- E. Cisco 2900 Series Router
- F. MPLS Layer 3 VPN
- G. Leased lines

Correct Answer: ABE

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:


A Cisco ASR is used to terminate Teleworker solutions, not a 2900 series router. Hybrid teleworker uses Aironet, Advanced teleworker uses 880, both use IP phones.

google: "at_a_glance_c45-652500.pdf" for details

The Cisco Virtual Office Solution for the Enterprise Teleworker is implemented using the Cisco 800 series ISRs. Each ISR has integrated switch ports that then connect to the user's broadband connection. The solution uses a permanent always-on IPsec VPN tunnel back to the corporate network. This architecture provides for centralized IT security management, corporate-pushed security policies, and integrated identity services. In addition, this solution supports the enterprise teleworker needs through advanced applications such as voice and video. For example, the enterprise teleworker can take advantage of toll bypass, voicemail, and advanced IP phone features not available in the PSTN.

Enterprise Teleworker Module

The enterprise teleworker module consists of a small office or a mobile user who needs to access services of the enterprise campus. As shown in Figure 2-14, mobile users connect from their homes, hotels, or other locations using dialup or Internet access lines. VPN clients are used to allow mobile users to securely access enterprise applications. The Cisco Virtual Office solution provides a solution for teleworkers that is centrally managed using small integrated service routers (ISR) in the VPN solution. IP phone capabilities are also provided in the Cisco Virtual Office solution, providing corporate voice services for mobile users.

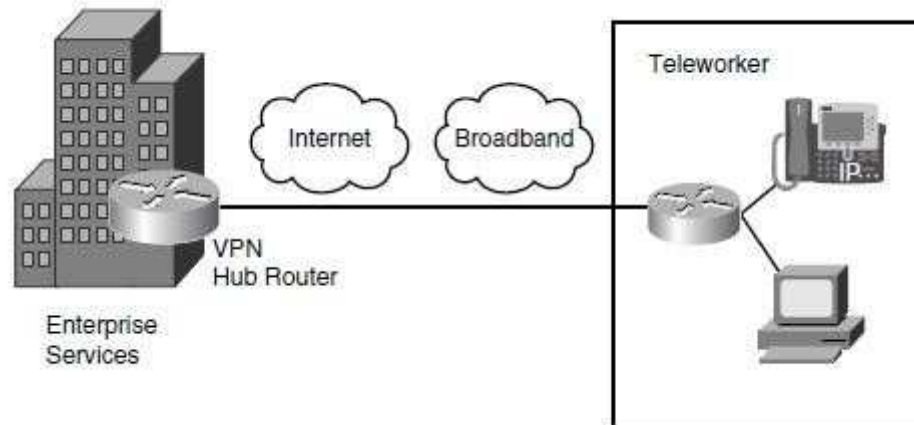

QUESTION 3

Which three types of WAN topologies can be deployed in the Service Provider Module? (Choose three.)

- A. ring
- B. star
- C. full mesh

- D. core/edge
- E. collapsed core
- F. partial mesh

Correct Answer: BCF

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

QUESTION 4

Your company's Cisco routers are operating with EIGRP. You need to join networks with an acquisition's heterogeneous routers at 3 sites, operating with EIGRP and OSPF. Which describes the best practice for routing protocol deployment?



<http://www.gratisexam.com/>

- A. Apply OSPF throughout both networks
- B. Apply one-way redistribution exclusively at each location
- C. Apply two-way redistribution exclusively at each location
- D. Apply two-way redistribution at each location with a route filter at only one location
- E. Apply two-way redistribution at each location with a route filter at each location
- F. Apply EIGRP with the same autonomous system throughout both networks

Correct Answer: E

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

Without filters there is possibility of routing loops. Link: http://www.cisco.com/en/US/tech/tk365/technologies_tech_note09186a008009487e.shtml

QUESTION 5

<http://www.gratisexam.com/>

Which two routing protocols converge most quickly? (Choose two.)

- A. RIPv1
- B. RIPv2
- C. BGP
- D. OSPF
- E. EIGRP

Correct Answer: DE

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

QUESTION 6

Which of these is the equation used to derive a 64 Kbps bit rate?

- A. $2 \times 8 \text{ kHz} \times 4\text{-bit code words}$
- B. $8 \text{ kHz} \times 8\text{-bit code words}$
- C. $2 \times 4\text{-bit code words} \times 8 \text{ kHz}$
- D. $2 \times 4 \text{ kHz} \times 8\text{-bit code words}$

Correct Answer: D

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

While the human ear can sense sounds from 20 to 20,000 Hz, and speech encompasses sounds from about 200 to 9000 Hz, the telephone channel was designed to operate at about 300 to 3400 Hz. This economical range carries enough fidelity to allow callers to identify the party at the far end and sense their mood. Nyquist decided to extend the digitization to 4000 Hz, to capture higher-frequency sounds that the telephone channel may deliver. Therefore, the highest frequency for voice is 4000 Hz. According to Nyquist theory, we must double the highest frequency, so $2 \times 4\text{kHz} = 8\text{kHz}$. Each sample will be encoded into a 8-bit code. Therefore $8\text{kHz} \times 8\text{-bit code} = 64 \text{ Kbps}$ (notice about the unit Kbps: $8\text{kHz} = 8000 \text{ samples per second}$ so $8000 \times 8\text{-bit} = 64000 \text{ bit per second} = 64 \text{ Kilobit per second} = 64 \text{ Kbps}$)

Link: <http://encyclopedia2.thefreedictionary.com/Nyquist+theorem>

Note:

Nyquist theory:

"When sampling a signal (e.g., converting from an analog signal to digital), the sampling frequency must be greater than twice the bandwidth of the input signal in

order to be able to reconstruct the original perfectly from the sampled version."

QUESTION 7

With deterministic Wireless LAN Controller redundancy design, the different options available to the designer have their own strengths. Which one of these statements is an example of such a strength?

- A. Dynamic load balancing, or salt-and-pepper access point design, avoids the potential impact of oversubscription on aggregate network performance.
- B. N+N redundancy configuration allows logically grouping access points on controllers to minimize intercontroller roaming events.
- C. N+N+1 redundancy configuration has the least impact to system management because all of the controllers are colocated in an NOC or data center.
- D. N+1 redundancy configuration uses Layer 3 intercontroller roaming, maintaining traffic on the same subnet for more efficiency.

Correct Answer: B

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

With such an arrangement there is no complex mesh of access points & controllers. Link: <http://www.cisco.com/web/learning/le31/le46/cln/qIm/CCDA/design/understanding-wireless-network-controller-technology-3/player.html>

N+N WLC Redundancy

With N+N redundancy, shown in Figure 5-14, an equal number of controllers back up each other. For example, a pair of WLCs on one floor serves as a backup to a second pair on another floor. The top WLC is primary for AP1 and AP2 and secondary for AP3 and AP4. The bottom WLC is primary for AP3 and AP4 and secondary for AP1 and AP2. There should be enough capacity on each controller to manage a failover situation.

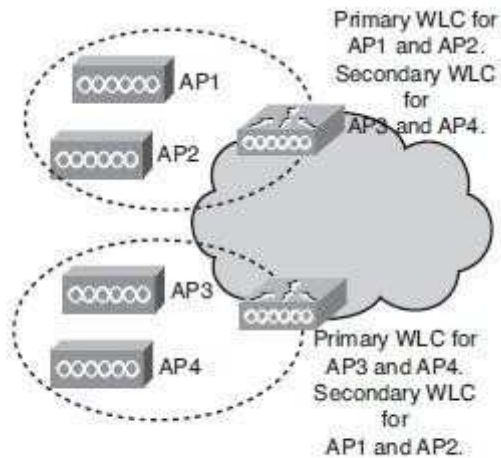


Figure 5-14 *N+N Controller Redundancy*

N+N+1 WLC Redundancy

With N+N+1 redundancy, shown in Figure 5-15, an equal number of controllers back up each other (as with N+N), plus a backup WLC is configured as the tertiary WLC for the APs. N+N+1 redundancy functions the same as N+N redundancy plus a tertiary controller that backs up the secondary controllers. The tertiary WLC is placed in the data center or network operations center

QUESTION 8

You have a campus network that consists of only Cisco devices. You have been tasked to discover the device platforms, the IOS versions, and an IP address of each device to map the network. Which proprietary protocol will assist you with this task?

- A. SNMP
- B. TCP
- C. CDP
- D. ICMP
- E. LLDP

Correct Answer: C

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

QUESTION 9

Which three technologies are recommended to be used for WAN connectivity in today's Enterprise Edge designs? (Choose three.)

- A. DWDM
- B. Metro Ethernet
- C. Frame Relay
- D. MPLS VPN
- E. ISDN
- F. DSL
- G. Wireless

Correct Answer: ABD

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

There is some discussion about whether ISDN not DWDM should be the answer but it does say TODAY'S network

QUESTION 10

WAN backup over the Internet is often used to provide primary connection redundancy. Which is the most important consideration when passing corporate traffic over the public Internet?



<http://www.gratisexam.com/>

- A. security
- B. static versus dynamic routing
- C. bandwidth
- D. QoS
- E. latency

Correct Answer: A

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

WAN Backup over the Internet

Another alternative for WAN backup is to use the Internet as the connectivity transport between sites. However, keep in mind that this type of connection does not support bandwidth guarantees. The enterprise also needs to work closely with the ISP to set up the tunnels and advertise the company's networks internally so that remote offices have reachable IP destinations. Security is of great importance when you rely on the Internet for network connectivity, so a secure tunnel using IPsec needs to be deployed to protect the data during transport.

QUESTION 11

To provide Layer 2 connectivity between the primary and remote data centers, given that the two data centers are using Layer 3 routed DCIs, which NX-OS technology can be used to facilitate this requirement?

- A. VRF
- B. OTV
- C. MPLS
- D. SPT
- E. VPC

Correct Answer: B

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

QUESTION 12

Which three modular components are part of the Cisco Enterprise Edge Architecture? (Choose three.)

- A. e-commerce module
- B. Internet connectivity module
- C. server farm module
- D. remote access and VPN module
- E. PSTN services module

- F. enterprise branch module
- G. building distribution module

Correct Answer: ABD

Section: Describe network structure and modularity

Explanation

Explanation/Reference:

Explanation:

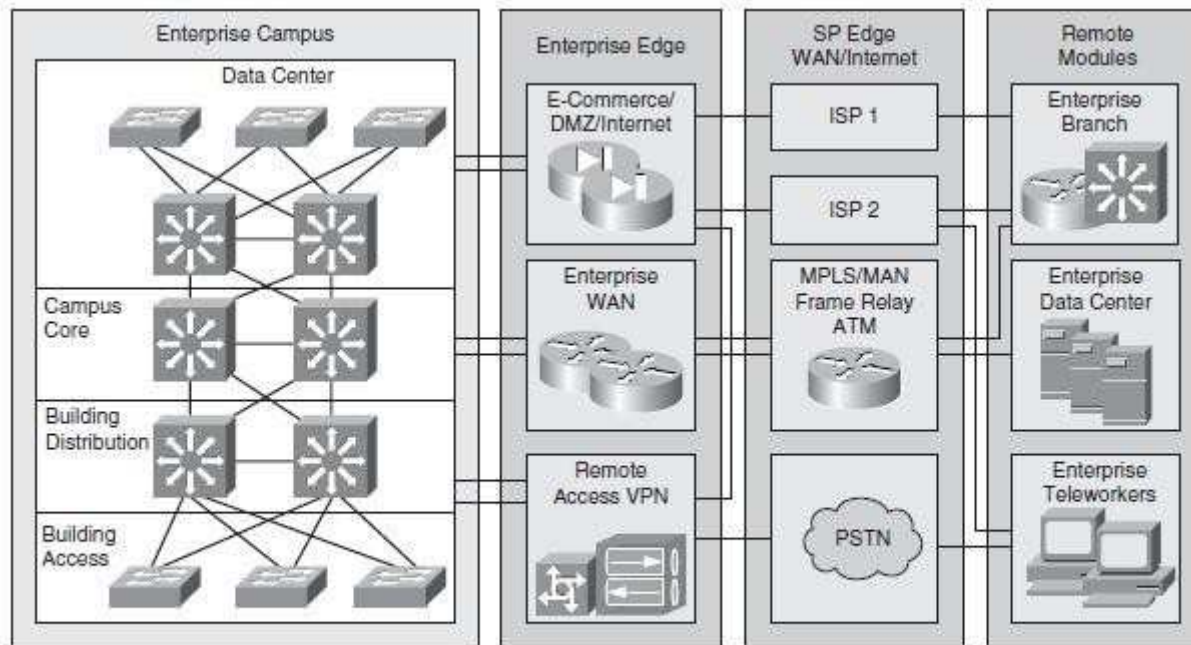


Figure 2-5 Cisco Enterprise Architecture Model

QUESTION 13

What are the three primary functions of the distribution layer of the campus network design hierarchy? (Choose three.)

- A. provide end-user connectivity

- B. provide high speed transport
- C. provide QoS services
- D. enforce security policies
- E. provide WAN connections
- F. connect access devices to the core backbone

Correct Answer: CDF

Section: Describe network structure and modularity

Explanation

Explanation/Reference:

Explanation:

QUESTION 14

Where in the Cisco Enterprise Architecture model does network management reside?

- A. Enterprise data center module
- B. Enterprise campus module
- C. Enterprise edge module
- D. Service Provider edge module
- E. Service Provider data center module

Correct Answer: B

Section: Describe network structure and modularity

Explanation

Explanation/Reference:

Explanation:

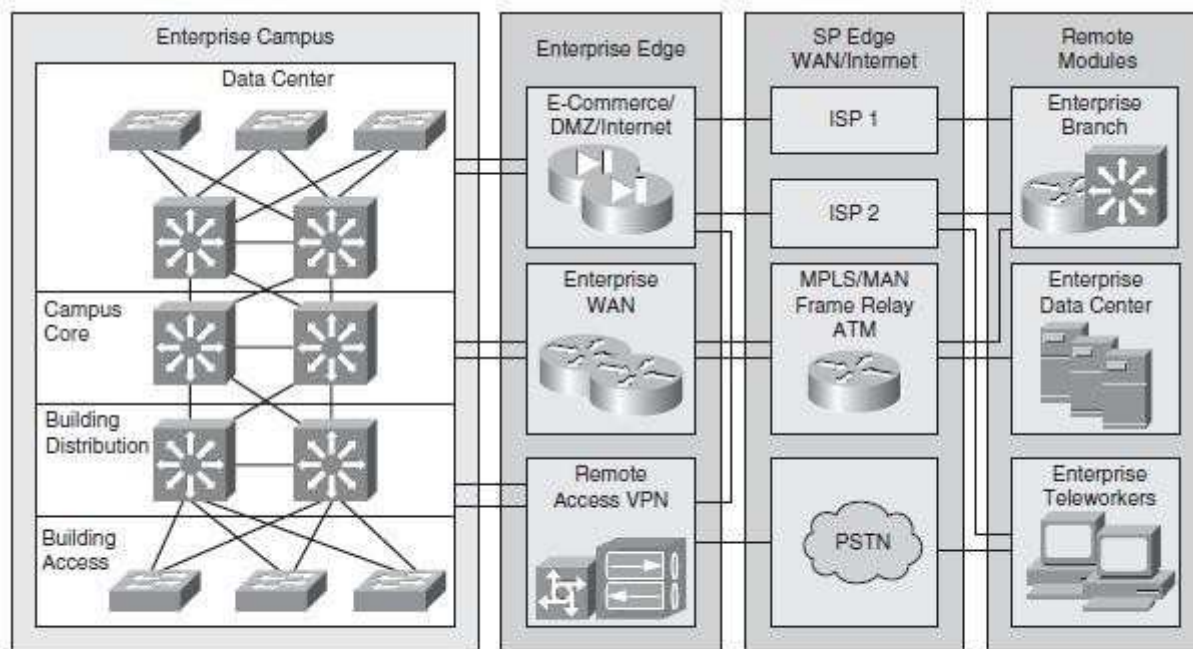


Figure 2-5 *Cisco Enterprise Architecture Model*

The network management servers reside in the campus infrastructure but have tie-ins to all the components in the enterprise network for monitoring and management.

QUESTION 15

Which three solutions are part of the Borderless Network Services? (Choose three.)

- A. Wireless
- B. Routing
- C. TrustSec
- D. MediaNet
- E. Switching
- F. EnergyWise
- G. Next-Gen WAN

Correct Answer: CDF

Section: Describe network structure and modularity

Explanation

Explanation/Reference:

Explanation:


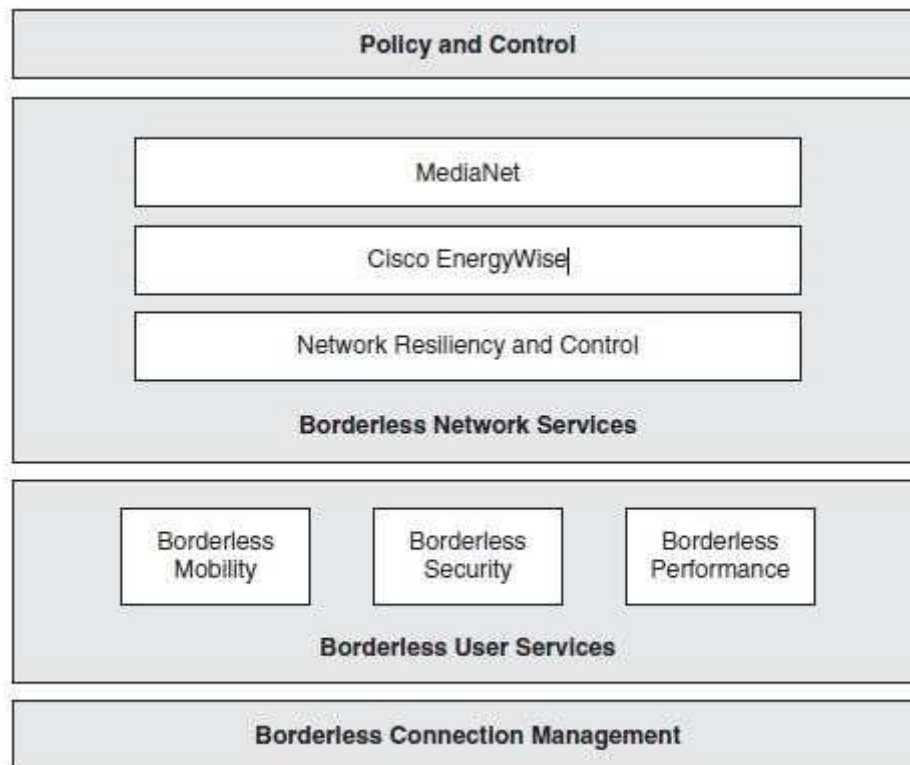


Figure 1-2 *Borderless Architecture*

Topic 3, Design Basic Enterprise Campus Networks

QUESTION 16

Refer to the exhibit.

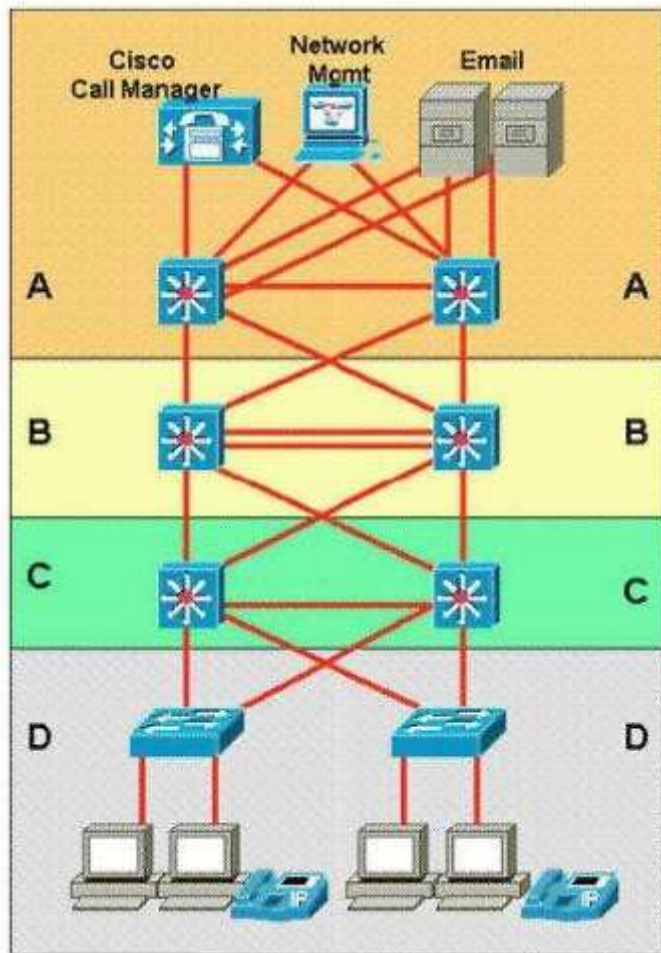

Which two statements correctly identify the layers of the Enterprise Campus module? (Choose two.)

- A. A is the Data Center Module and C is the Campus Core layer.
- B. A is the Data Center Module and D is the Building Access layer.
- C. B is the Campus Core layer and C is the Building Distribution layer.
- D. B is the Building Distribution layer and C is the Campus Core layer.
- E. A is the Internet Connectivity layer and B is the Campus Core layer.

F. B is the Building Distribution layer and D is the Building Access layer.

Correct Answer: BC

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

Module characteristics show to which category the blocks belong to. Link: <http://www.cisco.com/en/US/docs/solutions/Enterprise/Campus/campover.html#wp708780>

QUESTION 17

The evolution of the Data Center is best represented by the 3.0 architecture component of virtualization. Which of the following is not an example of the virtualization taking place in the Data Center?

- A. Virtualized media access utilizing Fiber Channel over Ethernet
- B. VLANs and virtual storage area networks (VSANs) provide for virtualized LAN and SAN connectivity, separating physical networks and equipment into virtual entities
- C. Virtual Machines that run an application within the client operating system, which is further virtualized and running on common hardware
- D. Storage devices virtualized into storage pools, and network devices are virtualized using device contexts

Correct Answer: A

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 18

When there is a need for immunity to EMI for connecting locations that are greater than 100 meters apart, which two solutions can be utilized? (Choose two.)

- A. multimode fiber
- B. Fiber Channel
- C. HVDC transmission lines
- D. single-mode fiber
- E. serial RS-232
- F. Gigabit Ethernet 1000BASE-CX

Correct Answer: AD

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 19

Which one of these statements is true concerning the data center distribution (aggregation) layer design?



<http://www.gratisexam.com/>

- A. With Layer 3 at the aggregation layer, the physical loops in the topology must still be managed by STP.
- B. The boundary between Layer 2 and Layer 3 must reside in the multilayer switches, independent of any other devices such as firewalls or content switching devices.
- C. A mix of both Layer 2 and Layer 3 access is sometimes the most optimal.
- D. In a small data center, the aggregation layer can connect directly to the campus core, exchanging IP routes and MAC address tables.

Correct Answer: C

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 20

Refer to the exhibit.

Which statement is true concerning enterprise edge distribution switches?

- A. The speed of switching is the most critical feature.
- B. Security requirements are offloaded to the other modules for performance reasons.
- C. Edge distribution switches are only required when using a collapsed core backbone.
- D. Enterprise edge distribution switches are similar to the building distribution layer.

<http://www.gratisexam.com/>

Correct Answer: D

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 21

Which is a factor in enterprise campus design decisions?

- A. network application characteristics
- B. routing protocol characteristics
- C. switching latency characteristics
- D. packet filtering characteristics

Correct Answer: A

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 22

Which network virtualization technology involves creating virtual routers with its own individual routing tables on a physical router?

- A. VSS
- B. vPC
- C. VRF
- D. VLAN

Correct Answer: C

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 23

Which protocol is the recommended first-hop redundancy protocol for an existing infrastructure that contains multiple vendors and platforms?

- A. HSRP
- B. VRRP
- C. IGRP
- D. OSPF

Correct Answer: B

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 24

Which IGP provides the fastest convergence by default?

- A. EIGRP
- B. OSPF
- C. IS-IS
- D. RSTP
- E. BGP

Correct Answer: A

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 25

Which three are valid Layer 2 access designs? (Choose three.)

- A. Looped Triangle
- B. Looped Square
- C. Looped U
- D. Loop-Free Triangle
- E. Loop-Free Square
- F. Loop-Free U

Correct Answer: ABF

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 26

Which Gigabit Ethernet media type provides the longest reach without a repeater?

- A. 1000Base-CX
- B. 1000Base-LX
- C. 1000Base-SX
- D. 1000Base-T

Correct Answer: B

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 27

Which three are associated with the distribution layer within the campus design? (Choose three.)

- A. access layer aggregation
- B. route summarization
- C. network trust boundary
- D. next-hop redundancy
- E. layer 2 switching
- F. port security
- G. broadcast suppression

Correct Answer: ABD

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 28

High availability is a key design consideration in the enterprise campus network. In a fully redundant topology, which is likely to provide faster IGP convergence during a failure?

- A. redundant supervisors
- B. redundant supervisors with Cisco Nonstop Forwarding (NSF) and Stateful Switchover (SSO)
- C. single supervisors with tuned IGP timers
- D. single supervisors

Correct Answer: C

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 29

Which two enterprise campus layers are combined in a medium-sized LAN? (Choose two.)

- A. core
- B. distribution
- C. access
- D. backbone
- E. aggregation

Correct Answer: AB

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 30

What is a characteristic of campus core designs?

- A. fast transport
- B. security

- C. summarization
- D. redistribution

Correct Answer: A

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 31

In the enterprise data center, which are the three main components? (Choose three.)

- A. Network Infrastructure
- B. Interactive services
- C. Data Center Management
- D. Internet services
- E. WAN services
- F. VPN and remote access

Correct Answer: ABC

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 32

Which two common cable management strategies are used in high-density server deployments in the data center? (Choose two.)

- A. top-of-rack
- B. middle-of-rack
- C. bottom-of-rack
- D. beginning-of-row
- E. middle-of-row
- F. end-of-row

Correct Answer: AF

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 33

Which servers that reside in the data center require direct links to all other enterprise modules?

- A. network management servers
- B. DHCP servers
- C. Active Directory servers
- D. IP SLA servers
- E. web servers

Correct Answer: A

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 34

When designing using the Cisco Enterprise Architecture, in which Enterprise Campus layer does the Remote Access and VPN module establish its connection?

- A. Building Access
- B. Campus Core
- C. Enterprise Branch
- D. Enterprise Data Center

Correct Answer: B

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 35

Which three describe challenges that are faced when deploying an environment for teleworkers? (Choose three.)

- A. supporting a mix of technically knowledgeable and nontechnical users
- B. simplifying router installation and configuration
- C. verifying available power at employee's house for necessary equipment
- D. avoiding situations where employees might use nonstandard hardware or configurations
- E. reducing daily commuting time to main office location
- F. providing access to FTP servers located in main office location
- G. implementing leased line connectivity between main office and employee's home location

Correct Answer: ABD

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 36

You need to connect to a remote branch office via an Internet connection. The remote office does not use Cisco equipment. This connection must be secure and must support OSPF. Which of the following can be used to transport data to the branch office?

- A. GRE over IPsec
- B. IPsec
- C. GRE
- D. IPsec VTI

Correct Answer: A

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 37

Which two are characteristics of a Lightweight Access Point? (Choose two.)

- A. managed via a central wireless LAN controller
- B. code upgrade performed via a TFTP server
- C. CAPWAP tunnels

- D. managed directly via CLI or web interface
- E. facilitates the creation of its own WLANs and port mappings

Correct Answer: AC

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 38

Which one of these statements describes why, from a design perspective, a managed VPN approach for enterprise teleworkers is most effective?

- A. A managed VPN solution uses a cost-effective, on-demand VPN tunnel back to the enterprise.
- B. This solution supports all teleworkers who do not require voice or video.
- C. This architecture provides centralized management where the enterprise can apply security policies and push configurations.
- D. It provides complete flexibility for remote access through a wireless hotspot or a guest network at a hotel, in addition to a home office.

Correct Answer: C

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 39

What are three key areas that need to be considered when designing a remote data center? (Choose three.)

- A. power diversity
- B. active directory services
- C. Cisco IOS versions
- D. data storage
- E. applications
- F. user access
- G. packet routing

Correct Answer: ADE

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 40

If a teleworker is required to access the branch office via a secure IPSEC VPN connection, which technology is recommended to provide the underlying transport?



<http://www.gratisexam.com/>

- A. ISDN
- B. Metro Ethernet
- C. Frame Relay
- D. ADSL
- E. ATM

Correct Answer: D

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 41

Which model of ISR is utilized for the teleworker design profile?

- A. Cisco 1900 Series
- B. Cisco 1800 Series
- C. Cisco 800 Series
- D. Cisco 500 Series

Correct Answer: C

Section: Design Enterprise Edge and Remote Network Modules

<http://www.gratisexam.com/>

Explanation

Explanation/Reference:

Explanation:

QUESTION 42

When designing a WAN backup for voice and video applications, what three types of connections should be used? (Choose three.)

- A. Private WAN
- B. internet
- C. ISDN
- D. MPLS
- E. dial-up
- F. ATM
- G. DSL

Correct Answer: ACD

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 43

Which three options represents the components of the Teleworker Solution? (Choose three.)

- A. Cisco Unified IP Phone
- B. Cisco 880 Series Router
- C. Aironet Office Extend Access Point
- D. Catalyst 3560 Series Switch
- E. Cisco 2900 Series Router
- F. MPLS Layer 3 VPN
- G. Leased lines

Correct Answer: ABE

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 44

Which three service categories are supported by an ISR? (Choose three.)

- A. voice
- B. security
- C. data
- D. Internet
- E. storage
- F. satellite

Correct Answer: ABC

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 45

When designing for a remote worker, which two are typical requirements? (Choose two.)

- A. best-effort interactive and low-volume traffic patterns
- B. connections to the enterprise edge using Layer 2 WAN technologies
- C. always-on connection with SLA from ISP
- D. voice and IPsec VPN support
- E. high-end security devices with stateful firewall filtering
- F. dual or multihoming to ISPs

Correct Answer: CD

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 46

What is the maximum number of groups that is supported by GLBP?

- A. 64
- B. 256
- C. 512
- D. 1024

Correct Answer: D

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

Explanation:

QUESTION 47

Which two routing protocols usually converge most quickly? (Choose two.)

- A. RIPv1
- B. RIPv2
- C. BGP
- D. OSPF
- E. EIGRP

Correct Answer: DE

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 48

Which two routing protocols operate over NBMA point-to-multipoint networks without the use of point-to-point sub interfaces? (Choose two.)

- A. RIPv1
- B. RIPv2
- C. IS-IS
- D. EIGRP
- E. OSPF

Correct Answer: DE

Section: Design IP Addressing and Routing Protocols

Explanation


Explanation/Reference:

Explanation:

QUESTION 49

Refer to the exhibit.

Enterprise Campus

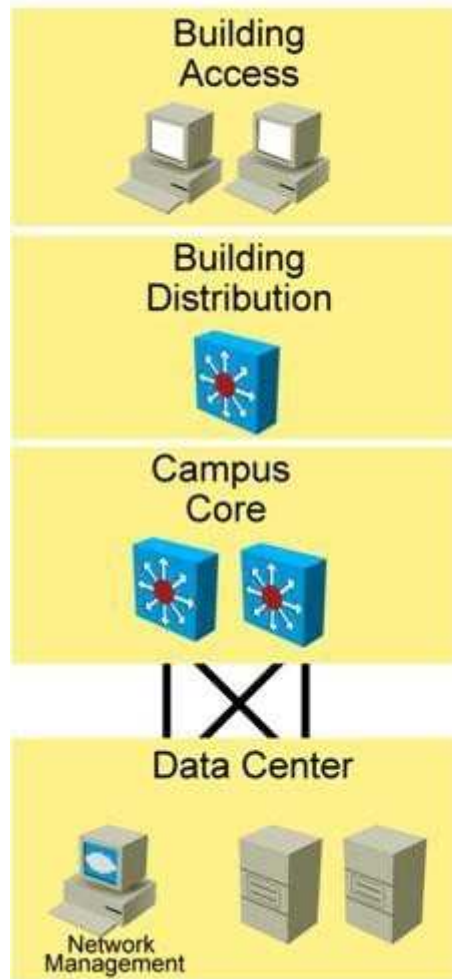

Enterprise Edge



Remote



Which three modules would typically utilize public IPv4 addressing? (Choose three.)

- A. Access
- B. Distribution

- C. Core
- D. Data Center
- E. E-Commerce
- F. Internet Connectivity
- G. Remote Access/VPN
- H. WAN/MAN
- I. Branch
- J. Branch Data Center

Correct Answer: EFG

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 50

With respect to IPv6 addressing, from a design perspective, which of these statements is it important to keep in mind?

- A. IPv6 addressing provides convenience of anycast addressing without any configuration requirements.
- B. IPv6 does not use multicast addressing.
- C. An IPv6 router will not forward packets from one link to other links if the packet has either a link- local source or a link-local destination address.
- D. Dynamic address assignment requires DHCPv6.

Correct Answer: C

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 51

Which consideration is the most important for the network designer when considering IP routing?

- A. convergence
- B. scalability
- C. on-demand routing
- D. redistribution

Correct Answer: A

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 52

Which two methods are used to reduce the mesh links required between iBGP peers in the same AS? (Choose two.)

- A. community
- B. router reflectors
- C. local preference
- D. confederations
- E. atomic aggregate
- F. MED

Correct Answer: BD

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 53

A company wants to use private IP addresses for all its internal hosts. Which technology can the company use to provide access to the Internet using a single public IP address?

- A. static NAT
- B. source routing
- C. ACL
- D. PAT

Correct Answer: D

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 54

At which layer of the network is route summarization recommended?

- A. data link layer
- B. core layer
- C. distribution layer
- D. access layer

Correct Answer: C

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 55

Which two link state routing protocols support IPv6 routing? (Choose two.)



<http://www.gratisexam.com/>

- A. BGP4+
- B. OSPF
- C. RIPng
- D. EIGRP
- E. IS-IS

Correct Answer: BE

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 56

What is the most compact representation of the following IPv6 address?

2001:db8:0000:0000:cafe:0000:0000:1234

- A. 2001:db8::cafe::1234
- B. 2001:db8::cafe:0000:0000:1234
- C. 2001:db8:0:0:cafe::1234
- D. 2001:db8::cafe:0:1234

Correct Answer: C

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 57

Which is usually used to connect to an upstream ISP?

- A. EIGRP
- B. OSPF
- C. BGP
- D. IS-IS
- E. RIPv2

Correct Answer: C

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 58

You are designing a network that requires a routing protocol that will use minimal network bandwidth. Which would satisfy this requirement?

- A. RIPv2
- B. RIPv6
- C. OSPF
- D. ARP
- E. EGP

Correct Answer: C

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 59

Which three items pertain to EIGRP? (Choose three.)

- A. Can use multiple unequal paths.
- B. Routes are redistributed as type 2 by default.
- C. ASN and K values must match to form neighbors.
- D. Uses multicast address 224.0.0.9 for updates.
- E. Exchanges full routing table every 30 seconds.
- F. Summary routes have AD of 90.
- G. External routes have AD of 170.

Correct Answer: ACG

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 60

Which three protocols support VLSM? (Choose three.)

- A. RIPv2
- B. RIPv1
- C. EIGRP
- D. OSPF

E. IGRP

Correct Answer: ACD

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 61

Which statement should the designer keep in mind when considering the advanced routing features?

- A. One-way route redistribution avoids the requirement for static or default routes.
- B. Redistribution, summarization, and filtering are most often applied between the campus core and enterprise edge.
- C. Filtering only occurs on the routing domain boundary using redistribution.
- D. Summarize routes at the core toward the distribution layer.
- E. The hierarchical flexibility of IPv6 addressing avoids the requirement for routing traffic reduction using aggregation.

Correct Answer: B

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 62

When designing an EIGRP network, which two things should you take into consideration? (Choose two.)

- A. ASN and K values must match.
- B. The neighbor command can be used to enable unicast communication.
- C. The neighbor diameter cannot exceed a 15-hops limit.
- D. NSSA areas can be used to redistribute external routes.
- E. Neighbor relationship can be established with non-Cisco routers.

Correct Answer: AB

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 63

Which statement describes a unique advantage of EIGRP?

- A. It enables unequal-cost load balancing.
- B. It enables equal-cost load balancing.
- C. It enables source-based load balancing.
- D. It enables port-based load balancing.

Correct Answer: A

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 64

ACME corporation is implementing dynamic routing on the LAN at its corporate headquarters. The interior gateway protocol that they select must support these requirements: multivendor environment, efficient subnetting, high scalability, and fast convergence. Which interior gateway protocol should they implement?

- A. EIGRP
- B. OSPF
- C. RIPng
- D. BGP

Correct Answer: B

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 65

Which routing protocol classification should you use when full topology information is needed?

- A. link-state
- B. distance vector
- C. stateful

D. path vector

Correct Answer: A

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 66

When designing the infrastructure protection portion for the enterprise edge, which solution would be the most appropriate solution to consider?

- A. 802.1X
- B. ACLs in the core layer
- C. Cisco Security MARS
- D. AAA

Correct Answer: D

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 67

Which two design approaches provide management of enterprise network devices? (Choose two.)

- A. in-band
- B. out-of-line
- C. out-of-band
- D. in-line

Correct Answer: AC

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 68

What are the three modes of unicast reverse path forwarding? (Choose three.)

- A. strict
- B. loose
- C. VRF
- D. global
- E. PIM
- F. local

Correct Answer: ABC

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 69

Which network access control technology is recommended to use with Layer 2 access layer switches?

- A. 802.1q
- B. 802.1x
- C. 802.3af
- D. 802.3q
- E. 802.11n

Correct Answer: B

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 70

Refer to the list of requirements. Which IP telephony design model should you implement to fulfill these requirements? - must be a single, large location with many remote sites - must have multisite WAN connectivity - requires SRST for call processing redundancy

- A. centralized

- B. distributed
- C. clustered
- D. decentralized

Correct Answer: A

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 71

Which three statements are true regarding the virtual interface on a Cisco Wireless LAN Controller? (Choose three.)

- A. supports mobility management
- B. serves as a DHCP relay
- C. used for all controller to AP communication
- D. supports embedded Layer 3 security
- E. default for out-of-band management
- F. default for in-band management
- G. provides connectivity to AAA servers

Correct Answer: ABD

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 72

A campus network needs end-to-end QoS tools to manage traffic and ensure voice quality. Which three types of QoS tools are needed? (Choose three.)

- A. interface queuing and scheduling
- B. congestion management
- C. compression and fragmentation
- D. bandwidth provisioning
- E. traffic classification
- F. buffer management

Correct Answer: ADE
Section: Design network services
Explanation

Explanation/Reference:
Explanation:

QUESTION 73

Select and Place:

Drag the security provision on the left to the appropriate Network module on the right.

Protect the endpoints using network-based intrusion prevention.

Filter and rate-limit control plane traffic.

Protect against inadvertent loops.

Does not perform security functions to mitigate transit threats.

Protect the infrastructure using NFP best practices.

Protect network services including DHCP, ARP, and IP spoofing protection.

Access

Distribution

Core

Correct Answer:

Drag the security provision on the left to the appropriate Network module on the right.

	Access
	Protect network services including DHCP, ARP, and IP spoofing protection.
	Protect against inadvertent loops.
	Distribution
	Protect the endpoints using network-based intrusion prevention.
	Protect the infrastructure using NFP best practices.
	Core
	Does not perform security functions to mitigate transit threats.
	Filter and rate-limit control plane traffic.

Section: Describe network structure and modularity

Explanation

Explanation/Reference:

Explanation:

http://www.cisco.com/en/US/docs/solutions/Enterprise/Security/SAFE_RG/chap5.html#wp1090913

http://www.cisco.com/en/US/docs/solutions/Enterprise/Security/SAFE_RG/chap3.html

QUESTION 74

Select and Place:

Drag the technology on the left to the type of enterprise virtualization where it is most likely to be found on the right.

	Network Virtualization
ASA firewall context	
IPS	
vPC	
VLAN	
VDC	
VRF	

Device Virtualization

Correct Answer:

Drag the technology on the left to the type of enterprise virtualization where it is most likely to be found on the right.

	Network Virtualization
	vPC
	VLAN
	VRF
	Device Virtualization
	ASA firewall context
	IPS
	VDC

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

Network virtualization encompasses logical isolated network segments that share the same physical infrastructure. Each segment operates independently and is logically separate from the other segments. Each network segment appears with its own privacy, security, independent set of policies, QoS levels, and independent routing paths.

Here are some examples of network virtualization technologies:

Device virtualization allows for a single physical device to act like multiple copies of itself. Device virtualization enables many logical devices to run independently of each other on the same physical piece of hardware. The software creates virtual hardware that can function just like the physical network device. Another form of device virtualization entails using multiple physical devices to act as one logical unit.

Here are some examples of device virtualization technologies:

QUESTION 75

Select and Place:

Drag the network characteristic on the left to the design method on the right which will best ensure redundancy at the building distribution layer.

Support Layer 2 VLANs spanning multiple access layer switches across the distribution switches

Convergence (FHRP) is not an issue

FHRP for convergence, no VLANs span between access layer switches across the distribution switches

Layer 2 between distribution and access layers, with a Layer 3 link between the distribution switches

Layer 2 between distribution and access layers, with a Layer 2 link between the distribution switches

VSS

Correct Answer:

Drag the network characteristic on the left to the design method on the right which will best ensure redundancy at the building distribution layer.

Layer 2 between distribution and access layers, with a Layer 3 link between the distribution switches

VSS

Layer 2 between distribution and access layers, with a Layer 2 link between the distribution switches

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

Layer 2 between distribution and access layers, with a Layer 3 link between the distribution switches

-> Support Layer 2 VLANs spanning multiple access layer switches across the distribution switches

Layer 2 between distribution and access layers, with a Layer 2 link between the distribution switches

-> FHRP for convergence, no VLANs span between access layer switches across the distribution switches

VSS -> Convergence (FHRP) is not an issue

The following are recommended best practices at the distribution layer:

Cisco Press CCDA 640-864 Official Certification Guide Fourth Edition, Chapter 3

QUESTION 76

Select and Place:

Drag the associated virtualization tool or solution on the left to the appropriate design requirement on the right.

VLANs and VSANs	virtual-machine visibility and policy control
Cisco Unified Computing System	simplified data center infrastructure and TCO
Cisco VN-Link technologies, including the Nexus 1000V Virtual Switch for VMware ESX	network, compute, and virtualization resources physically combined to deliver an optimized end-to-end virtualized environment
VSAN, virtual device contents, and unified fabric	physical networks and equipment separated into virtual entities

Correct Answer:

Drag the associated virtualization tool or solution on the left to the appropriate design requirement on the right.

	Cisco VN-Link technologies, including the Nexus 1000V Virtual Switch for VMware ESX
	VSAN, virtual device contents, and unified fabric
	Cisco Unified Computing System
	VLANs and VSANs

Section: Design Basic Enterprise Campus Networks
Explanation

Explanation/Reference:

QUESTION 77

Select and Place:

Drag the WAN technology on the left to the most appropriate category on the right.	
Frame-Relay	Leased
TDM	
SONET	
MPLS	Shared

Correct Answer:

Drag the WAN technology on the left to the most appropriate category on the right.

	Leased
	SONET
	TDM
	Shared
	MPLS
	Frame-Relay

Section: Design Enterprise Edge and Remote Network Modules
Explanation

Explanation/Reference:
Explanation:

Leased
SHARED

WAN Link characteristics				
	Use	Cost	Advantages	Examples
Private	WAN to connect distant LANs	Owner must buy and configure network Expensive to maintain	High security Transmission quality	Metro Ethernet using Dark Fiber
Leased	WAN to connect distant LANs	High cost Equipment is leased or private	Provider is responsible for maintenance Dedicated bandwidth	TDM, SONET
Shared	Shared circuit or packet switched WAN	Cost is fair Bandwidth is leased Equipment is leased or private	Provider is responsible for maintenance Shared network for multiple sites	MPLS or FR

Cisco Press CCDA 640-864 Official Certification Guide Fourth Edition, Chapter 6

QUESTION 78

When considering the three VoIP design models - single site, centralized multisite, and distributed multisite - which question below would help to eliminate one of the options?

- A. Will the switches be required to provide inline power?
- B. Will users need to make offsite calls, beyond the enterprise?
- C. Will users require applications such as voice mail and interactive voice response?
- D. Are there users whose only enterprise access is via a QoS-enabled WAN?

Correct Answer: D

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 79

Which two devices would you place in your DMZ to ensure enterprise edge security? (Choose two.)

- A. IPS
- B. NAC
- C. ASA
- D. ACS
- E. WCS

Correct Answer: AC

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 80

Which three are security services offered through Cisco Router Security? (Choose three.)

- A. Trust and Identity
- B. Integrated Threat Control
- C. Unified Wireless Network Security Solution
- D. Secure Connectivity
- E. Voice-Messaging Security
- F. Endpoint Security
- G. Virtual Security Gateway

Correct Answer: ABD

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 81

According to Cisco, which four improvements are the main benefits of the PPDIOO lifecycle approach to network design? (Choose four.)

- A. faster ROI
- B. improved business agility
- C. increased network availability
- D. faster access to applications and services
- E. lower total cost of network ownership
- F. better implementation team engagement

Correct Answer: BCDE

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

The PPDIOO life cycle provides four main benefits:

- + It improves business agility by establishing business requirements and technology strategies. + It increases network availability by producing a sound network design and validating the network operation.
 - + It speeds access to applications and services by improving availability, reliability, security, scalability, and performance.
 - + It lowers the total cost of ownership by validating technology requirements and planning for infrastructure changes and resource requirements.
- (Reference: Cisco CCDA Official Exam Certification Guide, 3rd Edition) described in the link below. Link: <http://www.ciscopress.com/articles/article.asp?p=1608131&seqNum=3>

QUESTION 82

During which phase of the PPDIOO model would you conduct interviews with supporting staff to develop and propose a viable solution?

- A. Prepare
- B. Plan
- C. Design
- D. Implement
- E. Operate
- F. Optimize

Correct Answer: A

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

PPDIOO Phase	Description
Prepare	Establishes organization and business requirements, develops a network strategy, and proposes a high-level architecture
Plan	Identifies the network requirements by characterizing and assessing the network, performing a gap analysis
Design	Provides high availability, reliability, security, scalability, and performance
Implement	Installation and configuration of new equipment
Operate	Day-to-day network operations
Optimize	Proactive network management; modifications to the design

Prepare Phase

The Prepare phase establishes organization and business requirements, develops a network strategy, and proposes a high-level conceptual architecture to support the strategy. Technologies that support the architecture are identified. This phase creates a business case to establish a financial justification for a network strategy.

QUESTION 83

Which three are considered as technical constraints when identifying network requirements? (Choose three.)

- A. support for legacy applications
- B. bandwidth support for new applications
- C. limited budget allocation
- D. policy limitations
- E. limited support staff to complete assessment
- F. support for existing legacy equipment
- G. limited timeframe to implement

Correct Answer: ABF

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

Network design might be constrained by parameters that limit the solution. Legacy applications might still exist that must be supported going forward, and these applications might require a legacy protocol that may limit a design. Technical constraints include the following:

- Existing wiring does not support new technology.
- Bandwidth might not support new applications.
- The network must support exiting legacy equipment.
- Legacy applications must be supported (application compatibility).

QUESTION 84

Characterizing an existing network requires gathering as much information about the network as possible. Which of these choices describes the preferred order for the information-gathering process?

- A. site and network audits, traffic analysis, existing documentation and organizational input
- B. existing documentation and organizational input, site and network audits, traffic analysis
- C. traffic analysis, existing documentation and organizational input, site and network audits
- D. site and network audits, existing documentation and organizational input, traffic analysis

Correct Answer: B

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

This section describes the steps necessary to characterize the existing network infrastructure and all sites. This process requires three steps:

Step 1. Gather existing documentation about the network, and query the organization to discover additional information. Organization input, a network audit, and traffic analysis provide the key information you need. (Note that existing documentation may be inaccurate.) Step 2. Perform a network audit that adds detail to the description of the network. If possible, use traffic-analysis information to augment organizational input when you are describing the applications and protocols used in the network.

Step 3. Based on your network characterization, write a summary report that describes the health of the network. With this information, you can propose hardware and software upgrades to support the network requirements and the organizational requirements.

Topic 2, Describe network structure and modularity

QUESTION 85

Which three terms describe the primary functions of the distribution layer of the campus network design hierarchy? (Choose three.)

- A. provides end-user connectivity
- B. provides high speed transport
- C. provides QoS services

- D. enforces security policies
- E. provides WAN connections
- F. connects access devices to the core backbone

Correct Answer: CDF

Section: Describe network structure and modularity

Explanation


Explanation/Reference:

Explanation:

Link: <http://www.cisco.com/en/US/docs/solutions/Enterprise/Campus/campover.html#wp708979>

QUESTION 86

Refer to the exhibit.

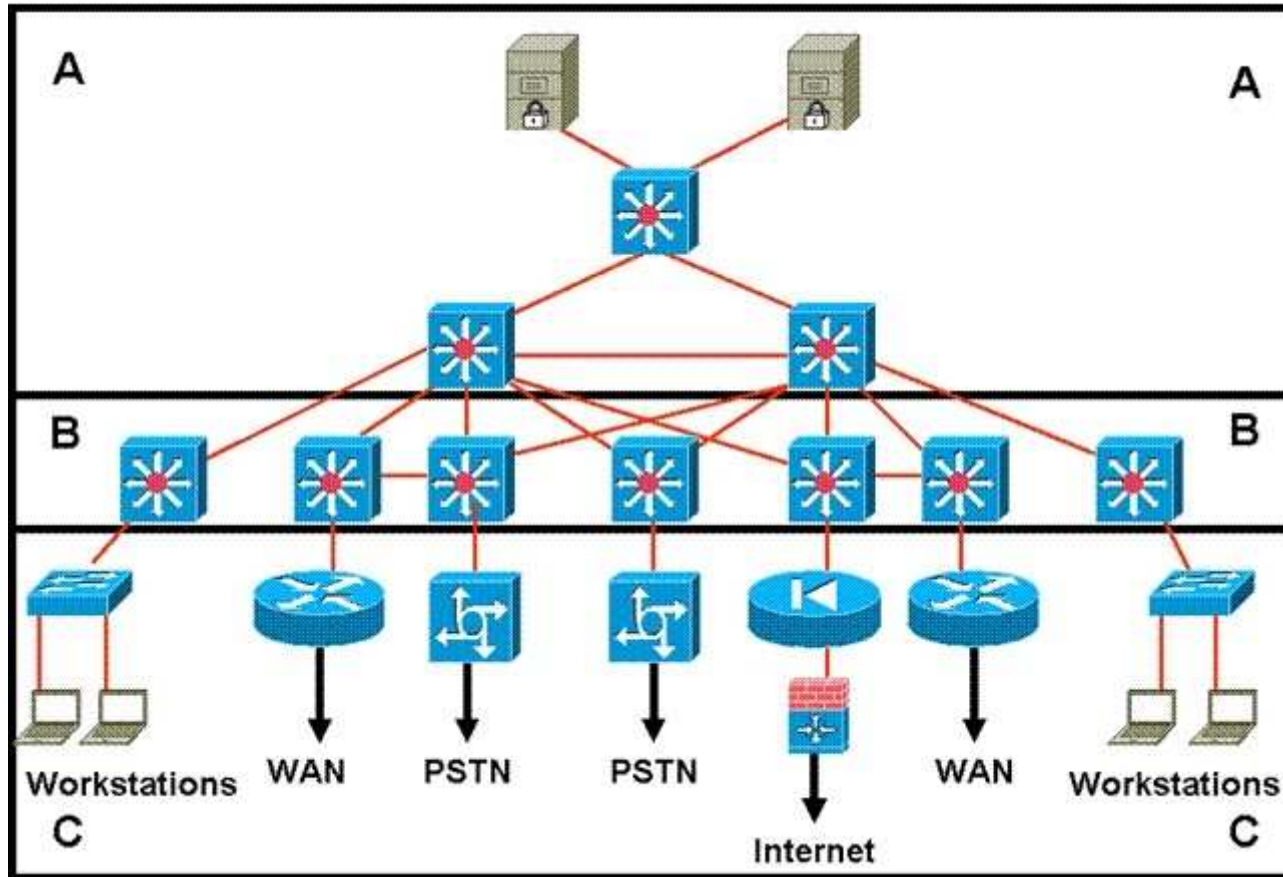

Which statement accurately represents the characteristics of the core layer in this design?

- A. QoS should only be performed only in the core.
- B. Load balancing should never be implemented or used.
- C. Access lists should be used in the core to perform packet manipulation.
- D. Partial mesh should be used as long as it is connected to each device by multiple paths.
- E. Policy-based traffic control should be implemented to enable prioritization and ensure the best performance for all time-critical applications.

Correct Answer: D

Section: Describe network structure and modularity

Explanation**Explanation/Reference:**

Explanation:

QUESTION 87

Which two of the following are benefits of using a modular approach to network design? (Choose two.)

- A. improves flexibility
- B. facilitates implementation
- C. lowers implementation costs
- D. improves customer participation in the design process

Correct Answer: AB

Section: Describe network structure and modularity

Explanation**Explanation/Reference:**

Explanation:

QUESTION 88

Which technology enables WLCs to peer with each other to enable roaming support?

- A. WAP profiles
- B. roaming profiles
- C. mobility groups
- D. peer groups

Correct Answer: C

Section: Design network services

Explanation**Explanation/Reference:**

Explanation:

QUESTION 89

Which IP telephony component supports VoIP, PoE, and QoS?

- A. client endpoints

- B. voice-enabled infrastructure
- C. Cisco Unified Communications Manager
- D. Cisco Unified Contact Center

Correct Answer: B

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 90

Which voice codec should you use in order to provide toll quality calls?

- A. G.711
- B. G.718
- C. G.722
- D. G.729

Correct Answer: A

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 91

Which three of these are layers in the Cisco SONA Architecture? (Choose three.)

- A. Applications
- B. Physical Infrastructure
- C. Presentation
- D. Integrated Transport
- E. Core Common Services
- F. Networked Infrastructure

Correct Answer: ABE

Section: Design network services

Explanation

Explanation/Reference:

QUESTION 92

Select and Place:

Drag the WAN characteristics on the left to the branch office model where it would most likely to be used on the right.	
	Small Office
Redundant devices	
MPLS Deployment model	
Redundant Links	Medium Office
Redundant Links and Devices	
Private WAN deployment	Large Office
Internet Deployment Model	

Correct Answer:

Drag the WAN characteristics on the left to the branch office model where it would most likely be used on the right.

Small Office
Redundant Links

Internet Deployment Model

Medium Office
Redundant devices

Private WAN deployment

Large Office
Redundant Links and Devices

MPLS Deployment model

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

Small Branch Design

The small branch design is recommended for branch offices that do not require hardware redundancy and that have a small user base supporting up to 50 users. This profile consists of an access router providing WAN services and connections for the LAN services.

The Layer 3 WAN services are based on the WAN and Internet deployment model. A T1 is used for the primary link, and an ADSL secondary link is used for backup. Other network fundamentals are supported, such as EIGRP, floating static routes, and QoS for bandwidth protection.

Medium Branch Design

The medium branch design is recommended for branch offices of 50 to 100 users, which is similar to the small branch but with an additional access router in the WAN edge (slightly larger) allowing for redundancy services.

Large Branch Design

The large branch design is the largest of the branch profiles, supporting between 100 and 1000 users. This design profile is similar to the medium branch design in that it also provides dual access routers in the WAN edge. In addition, dual Adaptive Security Appliances (ASA) are used for stateful firewall filtering, and dual distribution switches provide the multilayer switching component. The WAN services use an MPLS deployment model with dual WAN links into the WAN cloud.

Cisco Press CCDA 640-864 Official Certification Guide Fourth Edition, Chapter 7

QUESTION 93

Select and Place:

Drag the description or characteristic on the left to the appropriate technology or protocol on the right.	
provides complete network visibility from the physical layer to the application layer	SNMP
processes larger ACLs efficiently for packet filtering and security services	RMON
defines how information is exchanged between network management applications and agents	CDP
runs over the data link layer using a multicast address	NetFlow

Correct Answer:

Drag the description or characteristic on the left to the appropriate technology or protocol on the right.

	defines how information is exchanged between network management applications and agents
	provides complete network visibility from the physical layer to the application layer
	runs over the data link layer using a multicast address
	processes larger ACLs efficiently for packet filtering and security services

Section: Describe the Methodology used to design a network
Explanation

Explanation/Reference:

QUESTION 94

Select and Place:

Click and drag the phases of the PPDIOO network lifecycle approach on the left to the their order on the right.

Plan	Phase 1
Design	Phase 2
Prepare	Phase 3
Operate	Phase 4
Optimize	Phase 5
Implement	Phase 6

Correct Answer:

Click and drag the phases of the PPDIOO network lifecycle approach on the left to the their order on the right.


	Prepare
	Plan
	Design
	Implement
	Operate
	Optimize

Explanation


QUESTION 95

GRATIS EXAM
Free Practice Exams

Select and Place:

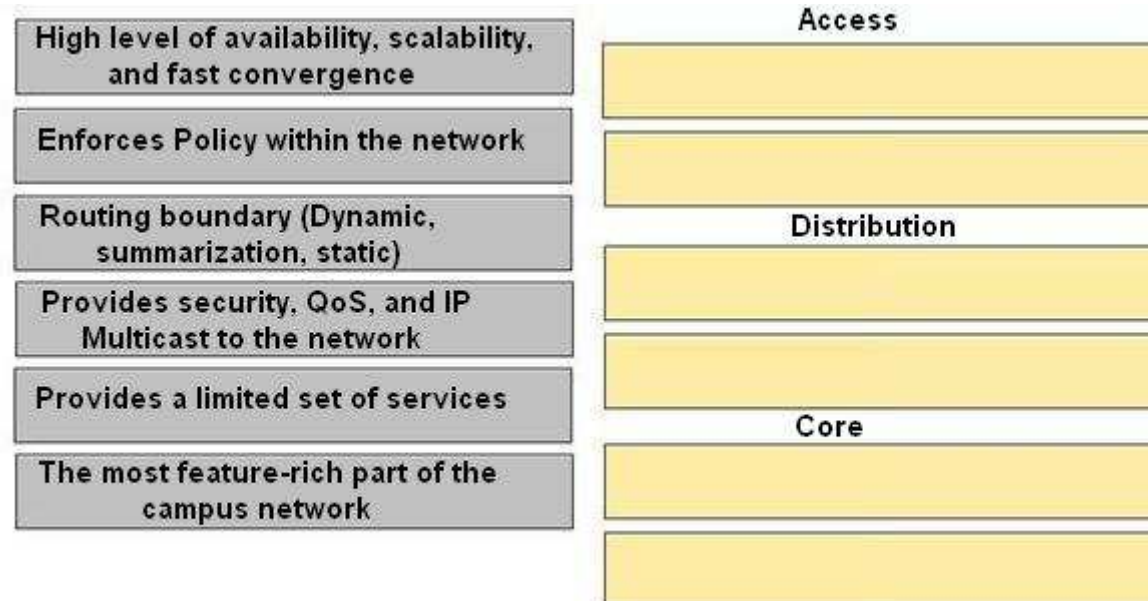

<http://www.gratisexam.com/>

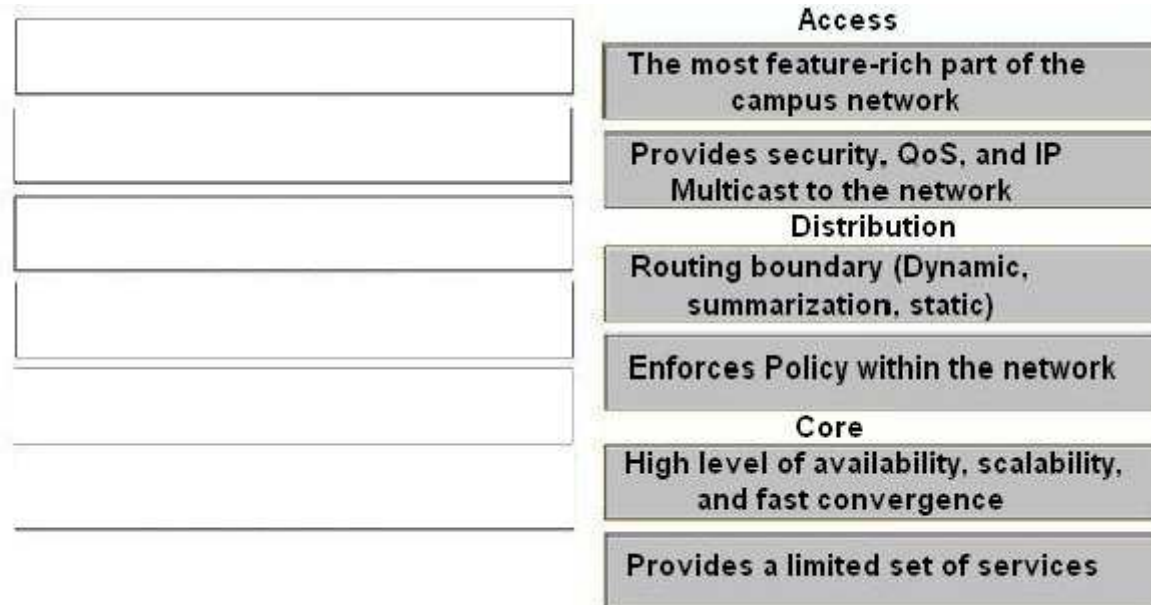

Section: Describe network structure and modularity

Explanation

Explanation/Reference:

QUESTION 96

You want to gather as much detail as possible during a network audit with a minimal impact on the network devices themselves. Which tool would you use to include data time stamping across a large number of interfaces while being customized according to each interface?

- A. RMON
- B. SNMPv3
- C. NetFlow
- D. Cisco Discovery Protocol

Correct Answer: C

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

QUESTION 97

In which phase of PPDIOO are the network requirements identified?

- A. Design
- B. Plan
- C. Prepare
- D. Implement
- E. Operate
- F. Optimize

Correct Answer: B

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

PPDIOO Phase	Description
Prepare	Establishes organization and business requirements, develops a network strategy, and proposes a high-level architecture
Plan	Identifies the network requirements by characterizing and assessing the network, performing a gap analysis
Design	Provides high availability, reliability, security, scalability, and performance
Implement	Installation and configuration of new equipment
Operate	Day-to-day network operations
Optimize	Proactive network management; modifications to the design


Plan Phase

The Plan phase identifies the network requirements based on goals, facilities, and user needs. This phase characterizes sites and assesses the network, performs a gap analysis against best-practice architectures, and looks at the operational environment. A project plan is developed to manage the tasks, responsible parties,

milestones, and resources to do the design and implementation. The project plan aligns with the scope, cost, and resource parameters established with the original business requirements. This project plan is followed (and updated) during all phases of the cycle.

QUESTION 98

Refer to the exhibit.

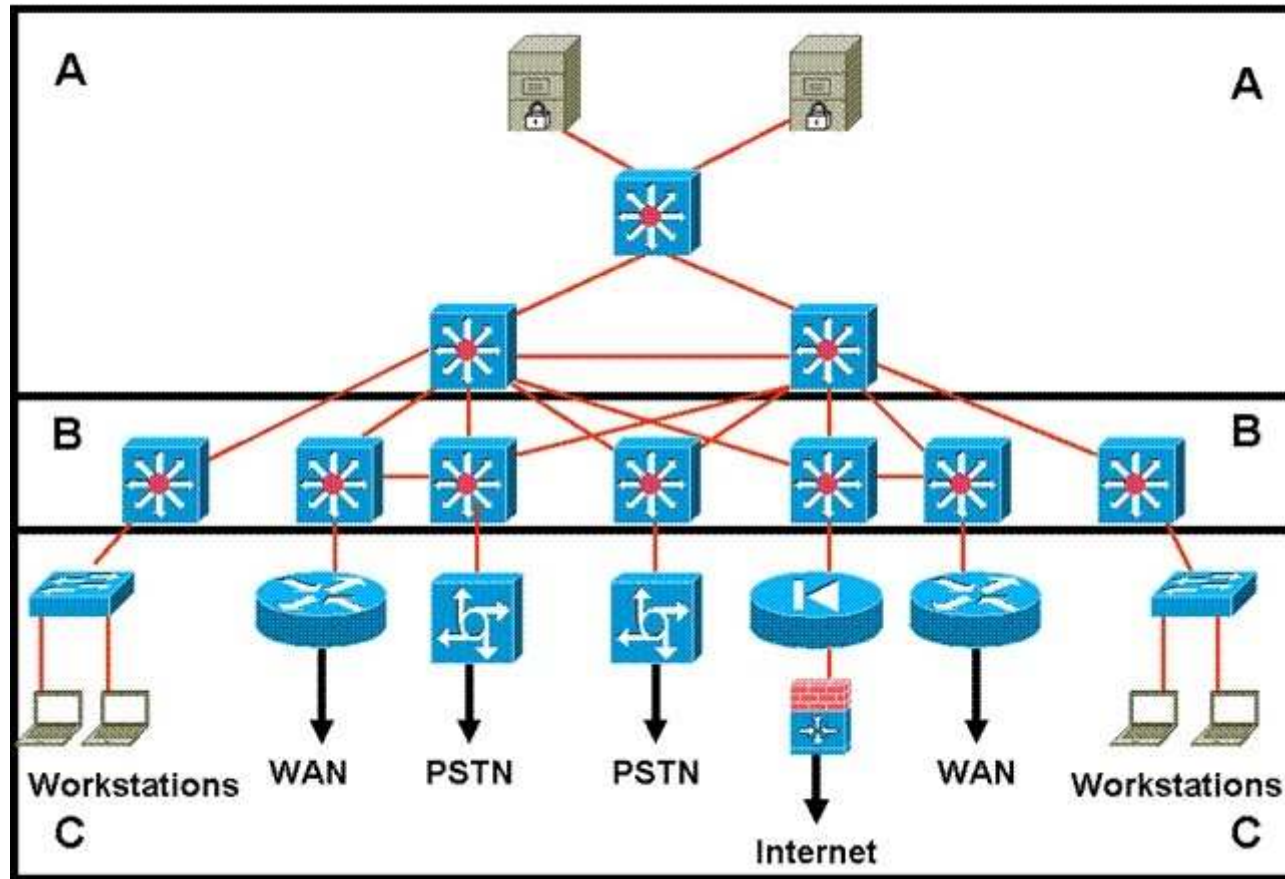

Which layer is the distribution layer?

- A. Layer A
- B. Layer B
- C. Layer C

D. Layers A and B form a consolidated core and distribution layer

Correct Answer: B

Section: Describe the Methodology used to design a network


Explanation

Explanation/Reference:

Explanation:

QUESTION 99

Refer to the exhibit.

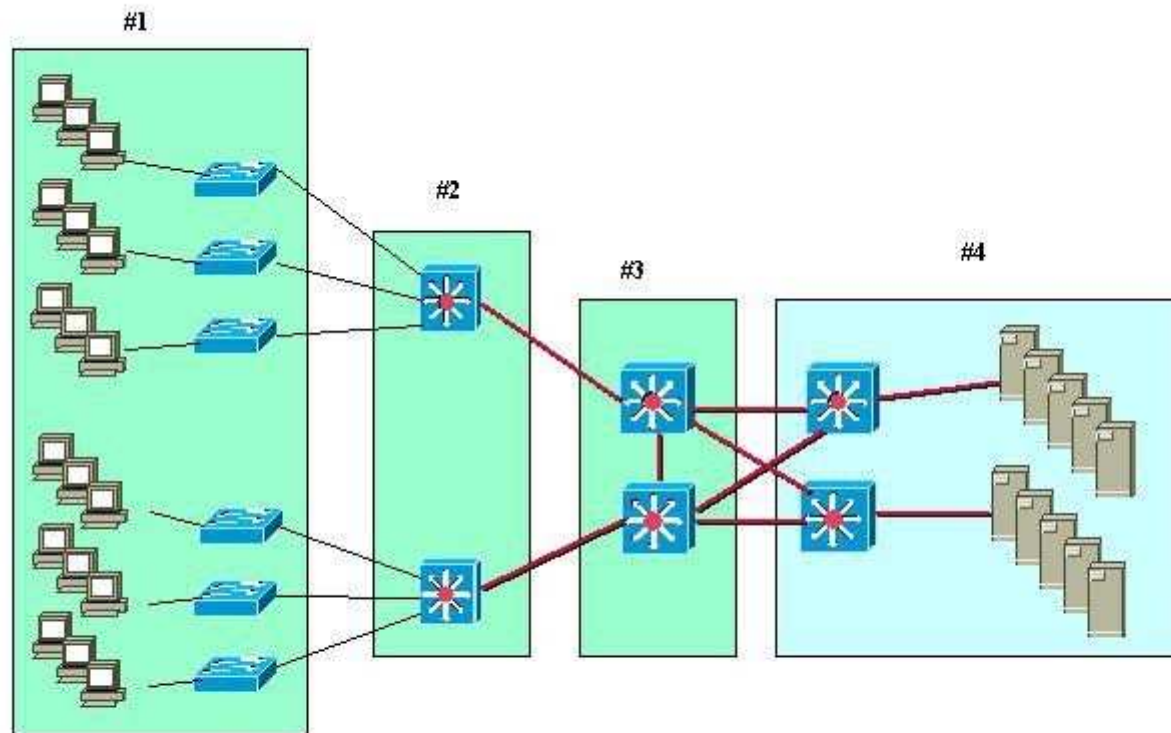

A standard, Layer 2 campus network design is pictured. Which numbered box represents the distribution layer?

- A. #1
- B. #2

- C. #3
- D. #4

Correct Answer: B

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

QUESTION 100

Which two are types of network virtualization? (Choose two.)

- A. VSS: Virtual Switching System
- B. VRF: virtual routing and forwarding
- C. VCI: virtual channel identifier
- D. VLSM: variable length subnet masking
- E. VM: virtual machine
- F. VMP: Virtual Memory Pool

Correct Answer: AB

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

Network virtualization encompasses logical isolated network segments that share the same physical infrastructure. Each segment operates independently and is logically separate from the other segments. Each network segment appears with its own privacy, security, independent set of policies, QoS levels, and independent routing paths.

Here are some examples of network virtualization technologies:

VLAN: Virtual local-area network
VSAN: Virtual storage-area network
VRF: Virtual routing and forwarding
VPN: Virtual private network
VPC: Virtual Port Channel

QUESTION 101

You are tasked with designing a new branch office that will support 75 users with possible expansion in the future and will need a highly available network. Which of

the branch design profiles should be implemented?

- A. large branch design
- B. medium branch design
- C. teleworker design
- D. small branch design

Correct Answer: B

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

Medium Branch Design

The medium branch design is recommended for branch offices of 50 to 100 users, which is similar to the small branch but with an additional access router in the WAN edge (slightly larger) allowing for redundancy services. Typically, two 2921 or 2951 routers are used to support the WAN, and separate access switches are used to provide LAN connectivity.

QUESTION 102

Which two can be used as a branch office WAN solution? (Choose two.)

- A. frame relay
- B. MPLS
- C. Metro Ethernet
- D. GPRS
- E. dial-up modem
- F. 3G USB modems

Correct Answer: BC

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

Explanation

Frame relay is old 'shared' technology today's sites use some flavor of Metro E or MPLS/VPN

QUESTION 103

Which is the North American RIR for IPv4 addresses?

- A. RIPE
- B. ARIN
- C. IANA
- D. IEEE
- E. APNIC

Correct Answer: B

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 104

Which two statements best describe an OSPF deployment? (Choose two.)

- A. ABR provides automatic classful network boundary summarization.
- B. ABR requires manual configuration for classful network summarization.
- C. External routes are propagated into the autonomous system from stub areas via ASBR.
- D. External routes are propagated into the autonomous system from regular areas or NSSA via ASBR.
- E. External routes are propagated into the autonomous system from regular areas or NSSA via ABR.

Correct Answer: BD

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 105

When you are designing a large IPv6 multivendor network, which IGP does Cisco recommend that you use?

- A. OSPFv3
- B. EIGRP for IPv6
- C. BGP
- D. RIPv6

Correct Answer: A

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

Topic 6, Design network services

QUESTION 106

You are asked to design a new branch office that will need to support 25 users. These users will be using an ISP connection and will need to connect to the main office for network services. Which two Cisco devices are the most appropriate to fulfill all of these requirements? (Choose two.)

- A. Cisco IPS
- B. Cisco ISR G2
- C. Cisco ASA
- D. Cisco 2960
- E. Cisco CRS-1
- F. Cisco ACS

Correct Answer: BC

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 107

Which is the equation used to derive a 64 Kbps bit rate?

- A. $2 \times 8 \text{ kHz} \times 4\text{-bit code words}$
- B. $8 \text{ kHz} \times 8\text{-bit code words}$
- C. $2 \times 4\text{-bit code words} \times 8 \text{ kHz}$
- D. $2 \times 4 \text{ kHz} \times 8\text{-bit code words}$

Correct Answer: D

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 108

Which factor would be most influential in choosing multimode fiber optic connections over UTP?

- A. signal attenuation
- B. required bandwidth
- C. required distance
- D. electromagnetic interference
- E. cost

Correct Answer: C

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 109

Which subnet address and mask would you use for all Class D multicast addresses to be matched within an access list?

- A. 224.0.0.0/20
- B. 224.0.0.0/4
- C. 239.0.0.0/24
- D. 239.0.0.0/8
- E. 225.0.0.0/8

Correct Answer: B

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 110

Which WLC interface is dedicated for WLAN client data?

- A. virtual interface

- B. dynamic interface
- C. management interface
- D. AP manager interface
- E. service port interface

Correct Answer: B

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

WLC Interface Types

A WLC has five interface types:

Management interface (static, configured at setup, mandatory) is used for in-band management, connectivity to AAA, and Layer 2 discovery and association.

Service-port interface (static, configured at setup, optional) is used for out-of-band management. It is an optional interface that is statically configured.

AP manager interface (static, configured at setup, mandatory except for 5508 WLC) is used for Layer 3 discovery and association. It has the source IP address of the AP that is statically configured. Dynamic interface (dynamic) is analogous to VLANs and is designated for WLAN client data. Virtual interface (static, configured at setup, mandatory) is used for Layer 3 security authentication, DHCP relay support, and mobility management.

QUESTION 111

Your supervisor wants you to recommend a management protocol that will allow you to track overall bandwidth utilization, utilization by traffic type, and utilization by source and destination. Which is ideally suited for this function?

- A. MRTG
- B. NetFlow
- C. RRD
- D. SNMP

Correct Answer: B

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 112

Which three are features of LWAPP? (Choose three.)

- A. firmware synchronization
- B. local management of APs
- C. configuration changes manually synced
- D. encryption of control channel
- E. configuration data only on the WLC
- F. wireless control free operation
- G. replaces 802.1x for authentication in wireless connections

Correct Answer: ADE

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 113

Select and Place:

The first phase of PPDIOO entails identifying customer requirements. Drag the example on the left to the associated requirement on the right.		
Budget		Identify existing and planned network applications
Email and HTTP		Identify existing and planned network services
Application compatibility		Define organizational constraints
IP telephony and video		Define the technical goals
Security		Define the technical constraints

Correct Answer:

The first phase of PPDIIO entails identifying customer requirements. Drag the example on the left to the associated requirement on the right.

	Email and HTTP
	IP telephony and video
	Budget
	Security
	Application compatibility

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

QUESTION 114

Which value is the most commonly accepted threshold of acceptable network response time.

- A. 1 millisecond
- B. 4 milliseconds
- C. 10 milliseconds
- D. 40 milliseconds
- E. 100 milliseconds
- F. 400 milliseconds

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 115

DataQuirk is a medical transcription company for exotic-animal veterinarians. The company recently added a third ISP for international business and is organizing the enterprise network into a fully operational Enterprise Edge. To which two modules will the three ISPs be directly related? (Choose two.)

- A. Edge Distribution
- B. WAN
- C. VPN/Remote Access
- D. Internet Connectivity
- E. E-Commerce
- F. PSTN

Correct Answer: DE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 116

An enterprise needs to connect networks at high data rates. The networks are located in different buildings with a clear line-of-sight. Which technology is a solution for this need?

- A. broadband fixed wireless
- B. cellular wireless
- C. wireless LAN
- D. Mobile IP
- E. ISDN

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 117

Which three actions are made possible by the summary report recommendations? (Choose three.)

- A. classification of new network features
- B. Design Document conclusions
- C. network health description
- D. proposed upgrades to hardware and software
- E. required feature support
- F. customer requirement modification

Correct Answer: DEF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 118

RevFloTech is a sewer and plumbing company that is concerned that the network management strategy is not as current as it should be. The company is specifically interested in improving the ability to provide usage information about network resources and would also like to improve inventory management. Which two functional areas of ISO Network Management will you focus on in your recommendations? (Choose two.)

- A. Fault
- B. Configuration
- C. Accounting
- D. Production
- E. Security
- F. FCAPS

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 119

A good implementation plan that considers the possibility of failure includes which two related principles? (Choose two.)

- A. A successful pilot or prototype is the only way to eliminate the possibility of failure.
- B. A test should be included at every step.

- C. A successful test is the only way to eliminate the possibility of failure.
- D. A detailed procedure to revert to the original setup is necessary for each and every implementation step.
- E. A good implementation plan must eliminate the possibility of failure.
- F. A table of failure points, rollback steps, and estimated rollback times is necessary to eliminate the possibility of failure.

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 120

Which two methods or tools are used to verify a network design produced by network modeling tools, decision tables, and strategic analysis tools? (Choose two.)

- A. simulation and test tools
- B. network management tools
- C. a pilot or prototype network
- D. redesign documentation

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 121

A prototype network is used to test a proposed network redesign solution. Although the test seemed to be successful, network performance is unacceptable when implemented in the live network. What was wrong with the prototype network test?

- A. The prototype should have been built on the live network.
- B. The prototype failed to test for the proper characteristics.
- C. The prototype network didn't match the live network exactly.
- D. Different configuration parameters existed in the prototype network.

Correct Answer: B

Section: (none)


Explanation

Explanation/Reference:

Explanation:

QUESTION 122

Refer to the exhibit. What should R1 announce as the summarized address toward its upstream router?

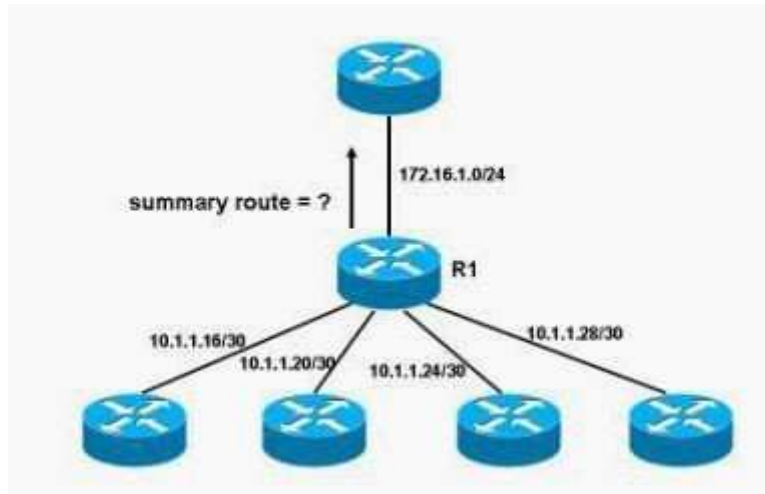

- A. 10.1.0.0/24
- B. 10.1.1.16/24
- C. 10.1.1.16/26
- D. 10.1.1.16/28
- E. 10.1.1.16/30
- F. 10.1.1.16/32

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 123

Which phrase best defines the PDIOO process?

- A. is the design phase of the network life cycle
- B. is the network life cycle phase that leverages organizational knowledge
- C. reflects the life cycle of the network
- D. reflects the organizational policy structure of the network

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 124

An administrator is assigned the task of providing a unique VLAN for the sales group that is moving into an existing building. There are presently two other workgroups in this building with 82 users each. Both groups have a subnet within a private class B address with a 255.255.255.128 mask. The sales group initially has 30 users, with a potential for growth to 52 users. The network RIPv1 routing protocol. Which subnet mask should be used for this new sales VLAN?

- A. 255.255.255.128
- B. 255.255.255.192
- C. 255.255.255.224
- D. 255.255.255.240

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 125

Which two routing protocols should be used given these requirements? (Choose two.) Within the Enterprise network: 1. All routers are Cisco 3600 Series routers running the latest Cisco IOS release. 2. The fastest convergence time possible is required. 3. Unequal cost load-balancing is required. For Internet connections: 1. A single link is used to connect to a single ISP.

- A. Use OSPF as the IGP within the Enterprise.
- B. Use EIGRP as the IGP within the Enterprise.

- C. Use Internal BGP as the IGP within the Enterprise.
- D. Use External BGP between the Enterprise and the ISP.
- E. Use EIGRP between the Enterprise and the ISP.
- F. Use Static/Default routing between the Enterprise and the ISP.

Correct Answer: BF

Section: (none)


Explanation

Explanation/Reference:

Explanation:

QUESTION 126

Refer to the exhibit. Which Campus Backbone Design does this most likely represent?

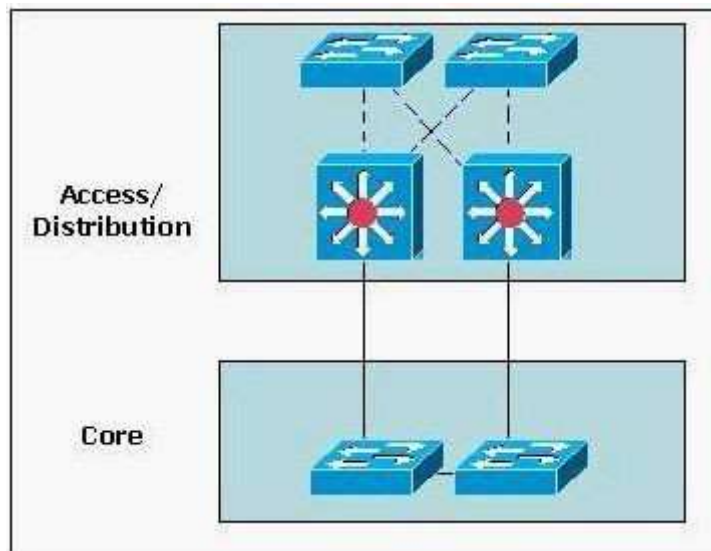

- A. Single VLAN Layer 2
- B. Split VLAN Layer 2
- C. Layer 3 VLAN
- D. Dual Path Layer 3 VLAN

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 127

A network summary report is a valuable tool in validating gathered information. Which information should it identify?

- A. new network features
- B. infrastructure shortcomings
- C. actions needed to support existing network features
- D. actions needed to support the existing network
- E. customer requirements
- F. customer requirement modifications

Correct Answer: B

Section: (none)


Explanation

Explanation/Reference:

Explanation:

QUESTION 128

During which stage of the PDIOO process are implementation procedures prepared in advance to expedite and clarify the actual implementation?

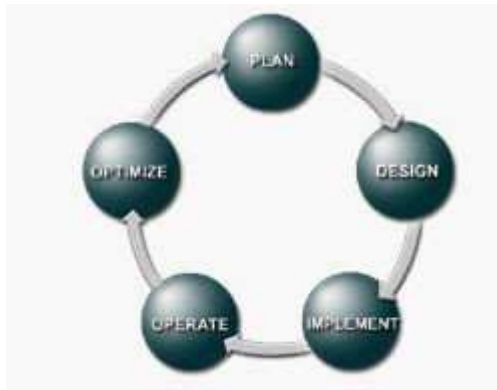

- A. PLAN
- B. DESIGN
- C. IMPLEMENT
- D. OPERATE
- E. OPTIMIZE
- F. RETIREMENT

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 129

A large manufacturing company is asking for performance improvements in the Enterprise Edge functional areas of its networks. Only Cisco routers are used in the Enterprise Edge functional areas of the various sites. The staff is very familiar with the IETF protocols. Rapid convergence is a requirement for the new design. Which two routing protocols can be considered the new design? (Choose two.)

- A. RIPv1
- B. OSPF
- C. EIGRP
- D. IGRP
- E. BGP
- F. IS-IS

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 130

FloCzar Boats is a marine transportation company that has undergone a period of rapid growth in the past year. The company has some issues with the Network Management design, and would like to enhance the information that is available about the devices. It seems that only static information can be obtained, and FloCzar would like to be able to get information that will help to perform long-term trend analysis. The company is specifically concerned with Layer 4. Which management protocol will best meet the goals?

- A. RMON
- B. SNMP
- C. NetFlow
- D. CDP
- E. RMON2

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 131

Which two design criteria require VLANs in a proposed solution? (Choose two.)

- A. security between departments
- B. segmenting collision domains
- C. segmenting broadcast domains
- D. video streaming on the LAN
- E. limited budget of the corporation
- F. use of multivendor equipment

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 132

You are documenting the existing network of a customer with a large installed Cisco network. You have prepared this list of the routers in use on the network: 435 Cisco model 2600 routers 129 Cisco model 3600 routers 10 Cisco model 7500 routers Which two additional items of information would be most valuable to complete your documentation of these routers? (Choose two.)

- A. error statistics
- B. power requirements

- C. interface options
- D. software revisions
- E. management protocols

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 133

Which three sources does a network designer use to collect information for characterizing an existing network? (Choose three.)

- A. staff input
- B. visual inventory
- C. network audit
- D. traffic analysis
- E. server statistics

Correct Answer: ACD

Section: (none)


Explanation

Explanation/Reference:

Explanation:

QUESTION 134

The two networks shown in the diagram have very different traffic patterns, as illustrated by the black arrows. Network A in this diagram has several independent departments, each with its own VLAN in which printers and servers are located. The only common resource is the mail server. Network B also has several departments but they use common server resources. Which network represents 80/20 rule in a campus network?

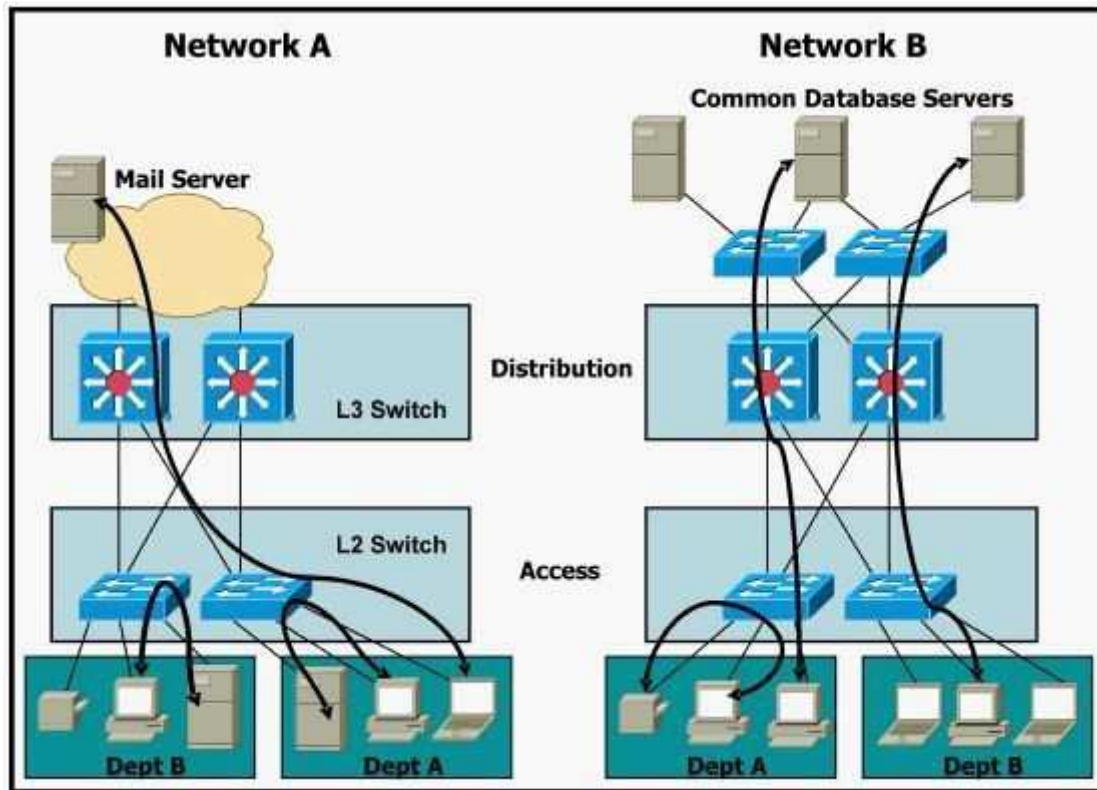

- A. Network A.
- B. Network B.
- C. Both networks are needed to achieve an 80/20 rule effect.
- D. Neither network represents the 80/20 rule.
- E. Both networks combined represent the 80/20 rule.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 135

Which three items should be included in a summary report that validates the findings of the information you have gathered when characterizing a network? (Choose three.)

- A. network services map
- B. network problems and drawbacks
- C. modularized network
- D. network features
- E. network applications map
- F. actions that support network requirements

Correct Answer: BDF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 136

What is part of the network auditing step when characterizing an existing enterprise network?

- A. customer input on the network topology
- B. detail from the NetFlow Collector analysis
- C. subdetail of NBAR reports
- D. third-party sniffer recommendations
- E. show tech-support; show processes cpu commands

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 137

Voice-to-IP encoding and compression take place in which module?

- A. Cisco CallManager

- B. Voice gateway
- C. Gatekeeper
- D. Layer 3 switches between the IP phones and the voice gateway

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 138

A large organization has made several acquisitions, each with its own network. All the networks use only Cisco Systems equipment, and the IP addresses do not overlap. The organization does not desire to redesign the address spaces to support a hierarchical design. Which routing protocol would be most suitable to connect the entire network?

- A. BGP
- B. IS-IS
- C. IGRP
- D. EIGRP
- E. OSPF

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 139

What is the benefit of VLSM?

- A. reduces configuration complexity by using the same subnet mask length
- B. reduces the routing table size by using automatic route summarization
- C. allows the advertisement of the subnet mask along with the classful routing updates
- D. conserves IP addresses by using different subnet masks length
- E. secures the hosts on a subnet by using RFC 1918 addresses

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Topic 4, D

D

QUESTION 140

The state hospital has six clinics spread throughout the state connected to the main hospital facility through dedicated links. Doctors practicing in the state have online access to patient diagnostic, scheduling and billing data in various hospital databases. The hospital has signed new agreements with three insurance providers and they are planning to open a new clinic on the opposite side of the state. The new clinic will have a trauma center which will require constant communication with the local emergency dispatch center. What additional information should you obtain about applications in use on the network?



<http://www.gratisexam.com/>

- A. the authentication methods used by the application
- B. the routing protocols supported by the application
- C. the application data-link layer overhead
- D. the applications' level of criticality

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 141

Which factor is a social requirement that will help you to identify current and future needs of your customer as you develop a new design plan?

- A. improved communications

<http://www.gratisexam.com/>

- B. business partnerships
- C. improved customer-support services
- D. the use of the network by its users as it relates to investors

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 142

Which three are essential elements of a network design document that is ready to be presented to a customer? (Choose three.)

- A. design specifications
- B. organizational chart
- C. implementation plan
- D. proof of concept
- E. data sources

Correct Answer: ACD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 143

Which value is the most commonly accepted threshold of acceptable network response time.

- A. 1 millisecond
- B. 4 milliseconds
- C. 10 milliseconds
- D. 40 milliseconds
- E. 100 milliseconds
- F. 400 milliseconds

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 144

In a voice network design, what provides reliable connections to Cisco CallManagers?

- A. enterprise edge
- B. building access
- C. building distribution
- D. server farm

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 145

A manufacturing company has decided to add a website to enhance sales. The web servers in the E- Commerce module must be accessible without compromising network security. Which two design recommendations can be made to meet these requirements? (Choose two.)

- A. Use intrusion detection on the E-Commerce server farm.
- B. Limit the number of incoming connections to the E-Commerce module.
- C. Place E-Commerce servers and application servers on isolated LANs (DMZs).
- D. Move the E-Commerce servers to the WAN module to provide tight security.
- E. Use private and public key encryption.

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 146

An analysis of the 256 kbps wan link for a network shows that the link is not usually congested. However, delay-sensitive applications are often hampered when large packets block access. What is this problem called and what are two possible solutions? (Choose three.)

- A. Link layer fragmentation and interleaving.
- B. Use different VLANs for each application type.
- C. Serialization delay.
- D. Compressed real-time protocol.
- E. Use different subinterfaces for each application type.
- F. Packetization delay.

Correct Answer: ACD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 147

Which three security measures can be used to DoS attacks that are directed at exposed hosts within the E-Commerce module? (Choose three.)

- A. Place the exposed hosts on isolated LANs.
- B. Use firewalls to block all unnecessary connections to the exposed hosts.
- C. Use LAN switch access-control mechanisms, such as VTP pruning, to separate hosts on the same segment.
- D. Use NIDSs and HIDSs to monitor individual hosts and subnets to detect signs of attack and to identify potentially successful breaches.
- E. Use a VPN concentrator (IPSec) to protect and verify each connection to the exposed host or hosts.

Correct Answer: ABD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 148

You are documenting the existing network of a customer with a large installed Cisco network. You have prepared this list of the routers in use on the network: 435 Cisco model 2600 routers 129 Cisco model 3600 routers 10 Cisco model 7500 routers Which two additional items of information would be most valuable to complete your documentation of these routers? (Choose two.)

- A. error statistics

- B. power requirements
- C. interface options
- D. software revisions
- E. management protocols

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 149

Which two descriptions are characteristics of the basic IPv6 header? (Choose two.)

- A. It is twice as big as an IPv4 header, 40 octets.
- B. It is always encrypted and hence is more secure than IPv4.
- C. It carries the full 128 bit source and destination IP addresses.
- D. It makes fragmentation performed at routers easier.
- E. It allows IPv6 datagrams to go through more hops/routers than IPv4.

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 150

Network enhancement may be possible when buffer misses per hour exceed which entrance?

- A. 10
- B. 25
- C. 40
- D. 50
- E. 75
- F. 100

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 151

Which three items should be included in a summary report that validates the findings of the information you have gathered when characterizing a network? (Choose three.)

- A. network services map
- B. network problems and drawbacks
- C. modularized network
- D. network features
- E. network applications map
- F. actions that support network requirements

Correct Answer: BDF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 152

Which two closely related items does a Draft Design Document require that directly influence the network design? (Choose two.)

- A. customer input
- B. traffic analysis
- C. design requirements
- D. existing network infrastructure
- E. logical topology map
- F. physical topology map

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 153

For the network backbone of a large campus environment, what are three advantages of a multilayer core switch design over a Layer 2 core switch design? (Choose three.)

- A. single VLAN implementation in the backbone
- B. reduced distribution router peering
- C. broadcast control in the backbone
- D. evenly distributed backbone traffic
- E. large scalability potential

Correct Answer: BCE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 154

Western Associated News Agency recently acquired a large news organization with several sites, which will allow it to expand to worldwide markets. The new acquisition brings with it a multitude of connectivity technologies, including Frame Relay, ATM, SONET, cable, DSL, and less. Which Enterprise Edge module will receive the most attention from a Layer 1 viewpoint?

- A. ISP
- B. PSTN
- C. Internet Connectivity
- D. WAN
- E. E-Commerce
- F. Edge Distribution

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 155

A large manufacturing company is asking for performance improvements in the Enterprise Edge functional areas of its networks. Only Cisco routers are used in the Enterprise Edge functional areas of the various sites. The staff is very familiar with the IETF protocols. Rapid convergence is a requirement for the new design. Which two routing protocols can be considered for the new design? (Choose two.)

- A. RIPv1
- B. OSPF
- C. EIGRP
- D. IGRP
- E. BGP
- F. IS-IS

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 156

You are designing IPv6 into an existing IPv4 network. Which two strategies can you use to allow both address schemes to coexist, thus facilitating migration? (Choose two.)

- A. translate one protocol into the other
- B. redistribute between IPv6-capable and non-IPv6-capable routing protocols
- C. encapsulate IPv6 packets within IPv4 packets
- D. bridge between the IPv6 and IPv4 networks
- E. enable anycast capability in the routing protocol

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 157

Which two routing protocols usually converge most quickly? (Choose two.)

- A. RIPv1
- B. RIPv2
- C. BGP
- D. IGRP
- E. EIGRP
- F. OSPF

Correct Answer: EF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 158

Which IPv6 feature enables routing to distribute connection requests to the nearest content server?

- A. Link-local
- B. Site-local
- C. Anycast
- D. Multicast
- E. Global aggregatable

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 159

Which two wireless attributes should be considered during a wireless site survey procedure? (Choose two.)

- A. encryption
- B. channel
- C. authentication
- D. power

E. SSID

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 160

When designing using the Cisco Enterprise Architecture, in which Enterprise Campus layer does the Enterprise Teleworker module establish its connection?

- A. Building Core
- B. Building Access
- C. Enterprise Branch
- D. Enterprise Data Center
- E. WAN/Internet

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 161

Which three of these are layers in the Cisco SONA Architecture? (Choose three.)

- A. Application
- B. Physical
- C. Presentation
- D. Integrated Transport
- E. Interactive Services
- F. Networked Infrastructure

Correct Answer: AEF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 162

What is the benefit of VLSM?

- A. reduces configuration complexity by using the same subnet mask length
- B. reduces the routing table size by using automatic route summarization
- C. reduces the routing table size by using manual route summarization
- D. allows the subnet mask and classful routing updates to be advertised
- E. secures the hosts on a subnet by using RFC 1918 addresses

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 163

You are performing an audit of a customer's existing network and need to obtain the following router information:

Interfaces
running processes
IOS image being executed

Which command should you use?

- A. show version
- B. show tech-support
- C. show startup-config
- D. show running-config
- E. show processes memory

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 164

Which two link state routing protocols support IPv6 routing? (Choose two.)

- A. BGP4+
- B. OSPF
- C. RIPng
- D. EIGRP
- E. IS-IS

Correct Answer: BE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 165

What is the recommended spanning tree protocol to use for all Layer 2 deployments in a branch office environment?

- A. CST
- B. RSPT
- C. PVST
- D. MISTP
- E. Rapid PVST +

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 166

Which of these domain-of-trust security statements is correct?

- A. Segments within a network should have the same trust models.

- B. An administrator should apply consistent security controls between segments.
- C. Communication between trusted entities needs to be carefully managed and controlled.
- D. Segment security policy decisions are based on trust.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 167

When collecting information about a customer's existing network, which two sources will provide the most accurate data? (Choose two.)

- A. traffic analysis
- B. customer interview
- C. customer-supplied server list
- D. existing network topology diagram
- E. configurations obtained from network equipment

Correct Answer: AE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 168

Which modules are found in the Enterprise Edge functional area of the Cisco Enterprise Architecture?

- A. Teleworker
- B. WAN/MAN
- C. Server Farm
- D. E-Commerce
- E. Internet Connectivity
- F. Remote Access/VPN

Correct Answer: BCDEF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Enterprise Edge functional area is composed of Following modules:

- E-commerce module: The E-commerce module includes the devices and services necessary for an organization to provide e-commerce applications.
- Internet Connectivity module: The Internet Connectivity module provides enterprise users with Internet access.
- Remote Access and VPN module: This module terminates VPN traffic and dial-in connections from external users.
- WAN and MAN and Site-to-Site VPN module: This module provides connectivity between remote sites and the central site over various WAN technologies.

QUESTION 169

A campus network needs end-to-end QoS tools to manage traffic and ensure voice quality. Which three types of QoS tools are needed? (Choose three.)

- A. interface queuing and scheduling
- B. congestion management
- C. compression and fragmentation
- D. bandwidth provisioning
- E. traffic classification
- F. buffer management

Correct Answer: ADE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 170

Which H.323 protocol is responsible for the exchanging of capabilities and the opening and closing of logical channels?

- A. H.225
- B. H.245
- C. RAS
- D. RTCP

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 171

Select and Place:

Correct Answer:

Section: (none)

Explanation

Explanation/Reference:

QUESTION 172

Select and Place:

Correct Answer:

Section: (none)

Explanation

Explanation/Reference:

QUESTION 173

What is the purpose of the Data Center aggregation layer?

Correct Answer: The Data Center Aggregation (distribution) layer aggregates the uplinks from the access layer to the Data Center Core layer and is the critical point for control and application services.

Section: (none)

Explanation

Explanation/Reference:

QUESTION 174

Where do you put DNS and DHCP on Enterprise model?

Correct Answer: Core and Internet

Section: (none)

Explanation

Explanation/Reference:

QUESTION 175

Which layer of the OSI model does Cisco recommend to place the enterprise network core layer, when designing a network based on its switched hierarchical design?

- A. Layer 1
- B. Layer 2
- C. Layer 3
- D. Layer 4

Correct Answer: C

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 176

OSPF will be used as the IGP within a campus network. Which two things should you consider before deployment? (Choose two.)

- A. All areas need to connect back to area 0.
- B. The OSPF process number on each router should match.
- C. NSSA areas should be used when an area cannot connect directly to area 0.
- D. Stub areas should be connected together using virtual links.
- E. ECMP may cause undesired results depending on the environment.

Correct Answer: AE

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 177

Which Cisco technology using Nexus NX-OS infrastructure allows the network architect to create up to four separate control and data plane instances of the Nexus chassis?

- A. virtual port-channel
- B. virtual routing and forwarding
- C. virtual switching system
- D. virtual device context

Correct Answer: D

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

Virtualization

Virtual local-area network (VLAN), virtual storage-area network (VSAN), and virtual device contexts (VDC) help to segment the LAN, SAN, and network devices instances. Cisco Nexus 1000V virtual switch for VMware ESX and ESXI help to deliver visibility and policy control for virtual machines (VM).

Flexible networking options with support for all server form factors and vendors, including support for blade servers from Cisco, Dell, IBM, and HP with integrated Ethernet and Fiber Channel switches.

QUESTION 178

Spanning Layer 2 across geographically separate data centers is a key consideration for current data center designs. Which is the name of the NX-OS technology that facilitates MAC in IP transport for Layer 2 VLANs across any IP network?

- A. Overlay Transport Virtualization
- B. Virtual Private LAN Services
- C. Generic Routing Encapsulation
- D. QinQ tunneling

Correct Answer: A

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 179

Which two statements about designing the Data Center Access layer are correct? (Choose two.)

- A. Multiport NIC servers should each have their own IP address.
- B. Layer 3 connectivity should never be used in the access layer.
- C. Layer 2 connectivity is primarily implemented in the access layer.
- D. Multiport NIC servers should never be used in the access layer.
- E. Layer 2 clustering implementation requires servers to be Layer 2 adjacent.

Correct Answer: CE


Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

User access is primarily layer 2 in nature, layer 2 clustering is possible only in layer 2 Here is the Explanation: from the Cisco press CCDA certification guide Figure 4-8. Enterprise Data Center Infrastructure Overview

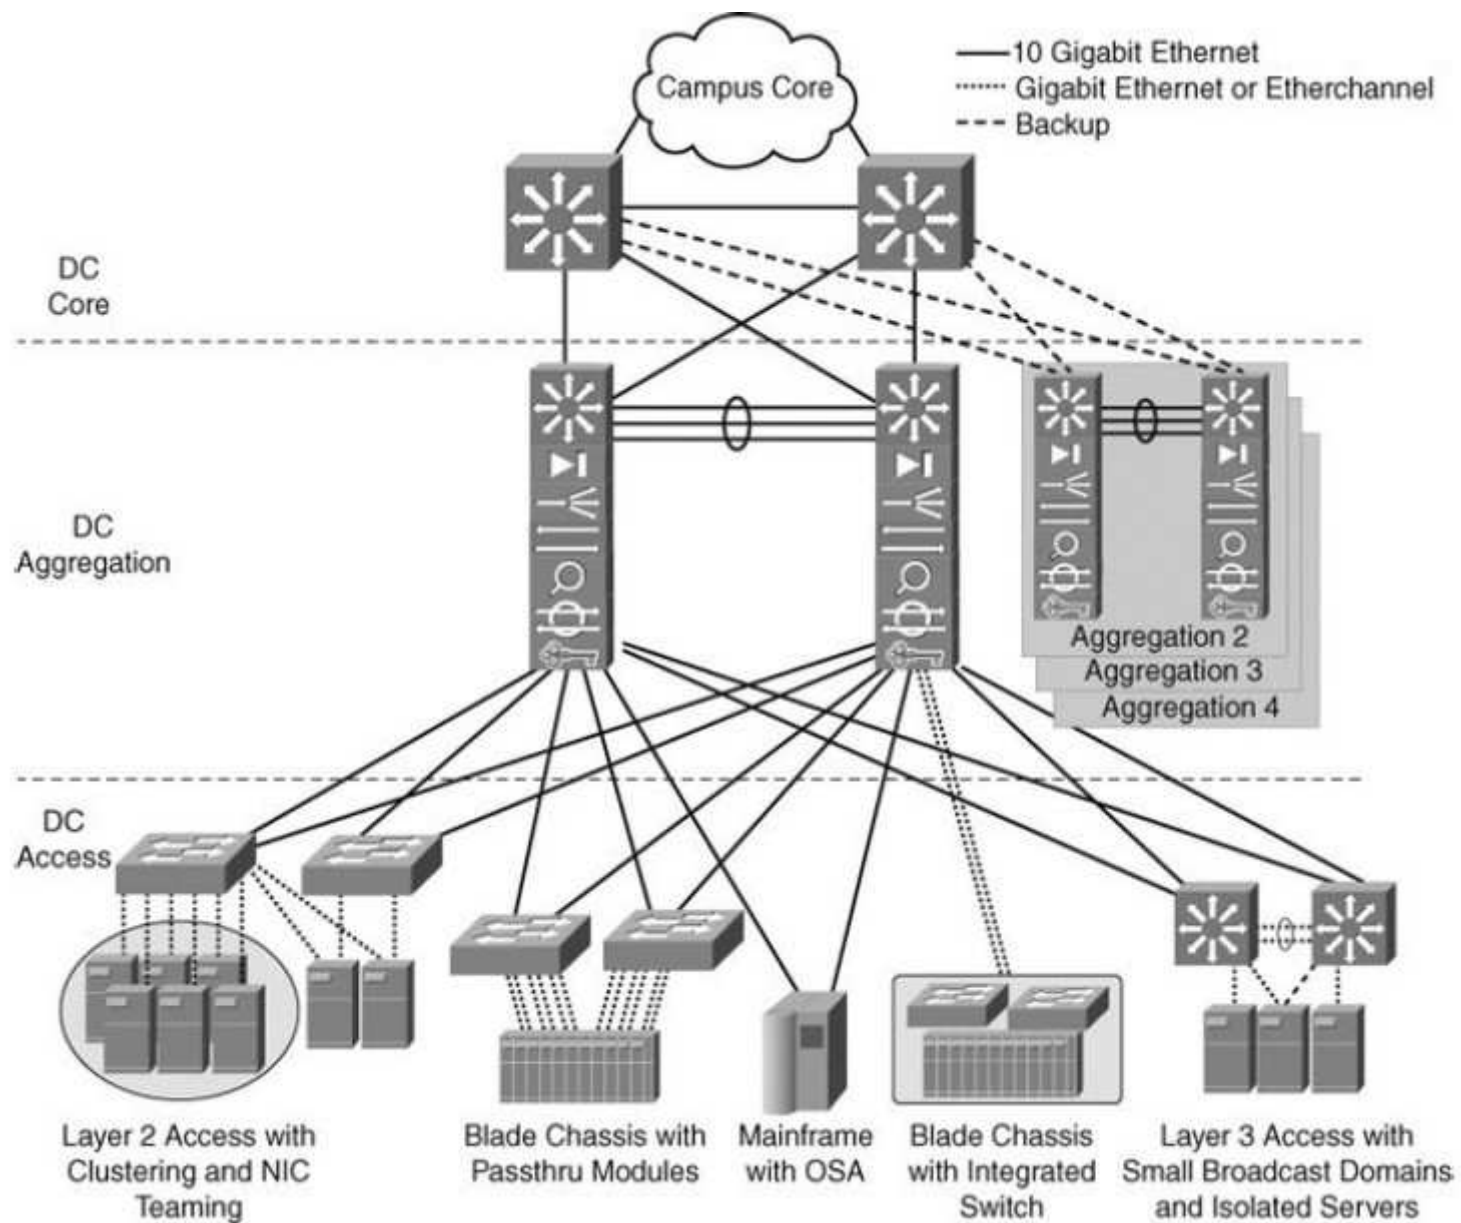

Defining the DC Access Layer

The data center access layer's main purpose is to provide Layer 2 and Layer 3 physical port density for various servers in the data center. In addition, data center access layer switches provide high- performance, low-latency switching and can support a mix of oversubscription requirements. Both Layer 2 and Layer 3 access (also called routed access) designs are available, but most data center access layers are built using Layer 2 connectivity. The Layer 2 access design uses VLAN trunks upstream, which allows data center aggregation services to be shared across the same VLAN and across multiple switches. Other advantages of Layer 2 access are support for NIC teaming and server clustering that requires network connections to be Layer 2 adjacent or on the same VLAN with one another.

CCDA 640-864 Official Certification Guide Fourth Edition, Chapter 4

QUESTION 180

What is the primary consideration when choosing a routed network design over a traditional campus network design?

- A. Layer 3 service support at the network edge
- B. the routing protocol choice: open (OSPF) or proprietary (EIGRP)
- C. the routing abilities of the host devices
- D. the need to control the broadcast domains within the campus core

Correct Answer: A

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

Layer 3 ability at network edge should be available to leverage the benefits of routed network design. Link: <http://www.cisco.com/en/US/docs/solutions/Enterprise/Campus/campover.html>

QUESTION 181

Which two of these practices are considered to be best practices when designing the access layer for the enterprise campus? (Choose two.)

- A. Implement all of the services (QoS, security, STP, and so on) in the access layer, offloading the work from the distribution and core layers.
- B. Always use a Spanning Tree Protocol; preferred is Rapid PVST+.
- C. Use automatic VLAN pruning to prune unused VLANs from trunked interfaces to avoid broadcast propagation.
- D. Avoid wasted processing by disabling STP where loops are not possible.
- E. Use VTP transparent mode to decrease the potential for operational error.

Correct Answer: BE

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

When designing the building access layer, you must consider the number of users or ports required to size up the LAN switch. Connectivity speed for each host should also be considered. Hosts might be connected using various technologies such as Fast Ethernet, Gigabit Ethernet, or port channels. The planned VLANs enter into the design.

Performance in the access layer is also important. Redundancy and QoS features should be considered. The following are recommended best practices for the building access layer:

- Limit VLANs to a single closet when possible to provide the most deterministic and highly available topology.
 - Use Rapid Per-VLAN Spanning Tree Plus (RPVST+) if STP is required. It provides the faster convergence than traditional 802.1d default timers.
 - Set trunks to ON and ON with no-negotiate.
 - Manually prune unused VLANs to avoid broadcast propagation (commonly done on the distribution switch).
 - Use VLAN Trunking Protocol (VTP) Transparent mode, because there is little need for a common VLAN database in hierarchical networks.
 - Disable trunking on host ports, because it is not necessary. Doing so provides more security and speeds up PortFast.
 - Consider implementing routing in the access layer to provide fast convergence and Layer 3 load balancing.
 - Use the switchport host commands on server and end-user ports to enable PortFast and disable channeling on these ports.
 - Use Cisco STP Toolkit, which provides
 - PortFast: Bypass listening-learning phase for access ports
 - Loop Guard. Prevents alternate or root port from becoming designated in absence of bridge protocol data units (BPDU)
 - Root Guard. Prevents external switches from becoming root
 - BPDU Guard. Disables PortFast-enabled port if a BPDU is received
- Cisco Press CCDA 640-864 Official Certification Guide Fourth Edition, Chapter 3, Page 85

QUESTION 182

The enterprise campus core layer has requirements that are unique from the distribution and access layers. Which of the following is true about the core layer?

- A. The core layer provides convergence using Layer 2 and Layer 3 services and features.
- B. The core layer provides high availability to support the distribution layer connections to the enterprise edge.
- C. The campus core layer is optional.
- D. The core layer requires high performance to manage the traffic policing across the backbone.

Correct Answer: B

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 183

Select and Place:

Match the bandwidth usage optimization technique on the left with its definition on the right.

queuing

window size

traffic policing

data compression

limits the number of frames transmitted before an acknowledgement is received

reduces data size to save transmission time, optimizing the use of WAN bandwidth

allows network administrators to manage the varying demands generated by applications

discards packets or modifies some aspect of them (such as IP precedence)

Correct Answer:

Match the bandwidth usage optimization technique on the left with its definition on the right.

window size

data compression

queuing

traffic policing

Section: Design Enterprise Edge and Remote Network Modules

Explanation

Explanation/Reference:

QUESTION 184

When designing the identity and access control portions for the enterprise campus network, which of these solutions would be the most appropriate solution to consider?

- A. 802.1X
- B. ACLs in the core layer
- C. Cisco Security MARS

D. NetFlow

Correct Answer: A

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

Field	Description
Bytes	Number of bytes of memory that are used by the NetFlow cache
Active	Number of active flows
Inactive	Number of flow buffers that are allocated in the Netflow cache
Added	Number of flows that have been created since the start of the summary
Exporting flows	IP address and UDP port number of the workstation to which flows are exported
Flows exported	Total number of flows export and the total number of UDP datagrams
Protocol	IP protocol and well-known port number
Total Flows	Number of flows for this protocol since the last time that statistics were cleared
Flows/sec	Average number of flows this protocol per second
Packets/flow	Average number of packets per flow per second
Bytes/pkt	Average number of bytes for this protocol
Packets/sec	Average number of packets for this protocol per second

QUESTION 185

Which is the purpose of the Cisco NAC Profiler?

- A. Automates discovery and inventory of all LAN attached devices
- B. Generates a profile based on username and group
- C. Learns and creates a database of virus definitions based on LAN traffic

D. A database used to map user VPN accounts

Correct Answer: A

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

Cisco NAC Profiler: Enables network administrators to keep a real-time, contextual inventory of all devices in a network. It greatly facilitates the deployment and management of Cisco Network Admission Control (NAC) systems by discovering and tracking the location and type of all LAN- attached endpoints, including those that are not capable of authenticating. It also uses the information about the device to determine the correct policies for NAC to apply.

QUESTION 186

Which protocol is used for voice bearer traffic?

- A. MGCP
- B. RTP
- C. SCCP
- D. CDP
- E. ICMP

Correct Answer: B

Section: Describe the Methodology used to design a network


Explanation

Explanation/Reference:

Explanation:

VoIP Control and Transport Protocols

A number of different protocols are used in a VoIP environment for call control, device provisioning, and addressing. Figure 14-15 shows those protocols focused on VoIP control and transport.

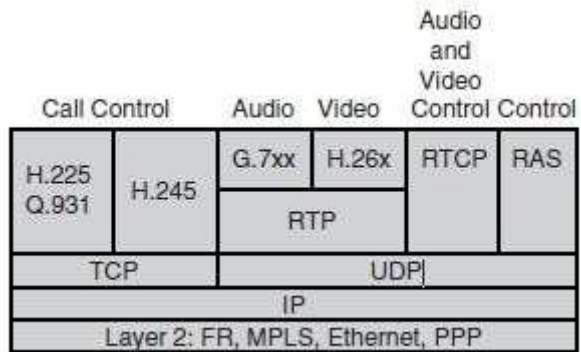

QUESTION 187

Which protocol is used to reserve bandwidth for the transport of a particular application data flow across the network?

- A. cRTP
- B. IEEE 802.1P
- C. RSVP
- D. LFI
- E. Auto QOS

Correct Answer: C

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

RSVP Signaling protocol that enables end stations or applications to obtain guaranteed bandwidth and low delays for their data flows.

QUESTION 188

Which four services does the architecture for Media Services contain? (Choose four.)

- A. access services
- B. transport services
- C. storage services
- D. forwarding services

- E. session control services
- F. security services
- G. filtering services
- H. remote access services

Correct Answer: ABCE

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

An architecture framework for media services supports different models of video models. As shown in Figure 14-13, the network provides service to video media in the Media Services Framework. Those services are access services, transport services, bridging services, storage servers, and session control services, which are provided to endpoints.

Access services provide identity of end devices, mobility, and location services. Transport services provide QoS for reliable packet delivery. Bridging services provide transcoding, conferencing, and recording services of media streams. Storage services provide capture and storage of media streams and content management and distribution.

Session control services provide session signaling and control and gateway services.

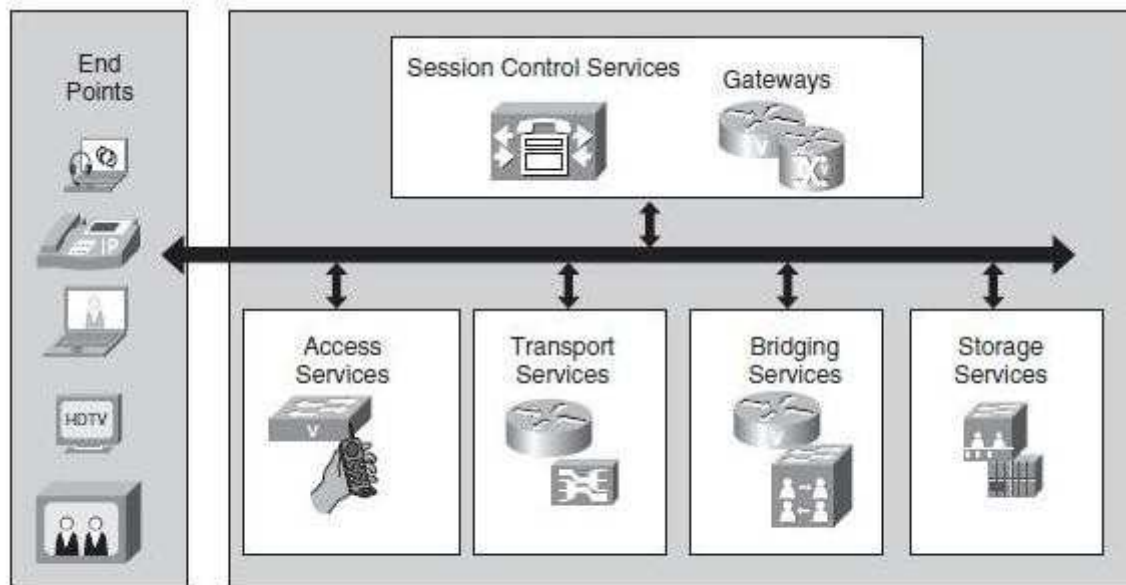


Figure 14-13 *Media Services Architectural Framework*

QUESTION 189

Which WAN technology is a cost-effective method to deliver 100Mb of bandwidth to multiple branch offices?



<http://www.gratisexam.com/>

- A. DSL
- B. DWDM
- C. ISDN
- D. Metro Ethernet

Correct Answer: D

<http://www.gratisexam.com/>

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 190

A company is implementing an Identity Management solution with these characteristics:

- 1) existing AAA Server
- 2) Cisco Catalyst switches
- 3) minimal added investments

Which Cisco Trust and Identity Management solution would you recommend?

- A. NAC Appliance
- B. Cisco IBNS
- C. CSM
- D. Cisco Security MARS

Correct Answer: B

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 191

Which mode is used to exclusively look for unauthorized access points?

- A. monitor mode
- B. sniffer mode
- C. rogue detector mode
- D. local mode

Correct Answer: C

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

AP Mode	Description
Monitor mode	
Rogue Detector mode	
Sniffer mode	
Bridge mode	

Interference detection and avoidance: As Cisco LWAPs monitor all channels, interference is detected by a predefined threshold (10 percent by default). Interference can be generated by rogue APs, microwaves, cordless telephones, Bluetooth devices, neighboring WLANs, or other electronic devices.

QUESTION 192

Which statement describes the recommended deployment of DNS and DHCP servers in the Cisco Network Architecture for the Enterprise?

- A. Place the DHCP and DNS servers in the Enterprise Campus Access layer and Enterprise branch.
- B. Place the DHCP and DNS servers in the Enterprise Campus Server Farm layer and Enterprise branch.
- C. Place the DHCP server in the Enterprise Campus Core layer and Remote Access_VPN module with the DNS server in the Internet Connectivity module.
- D. Place the DHCP server in the Enterprise Campus Distribution layer with the DNS server in the Internet Connectivity module.

Correct Answer: B


Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

For the Enterprise Campus, DHCP and internal DNS servers should be located in the Server Farm and they should be redundant. External DNS servers can be placed redundantly at the service provider facility and at the Enterprise branch.

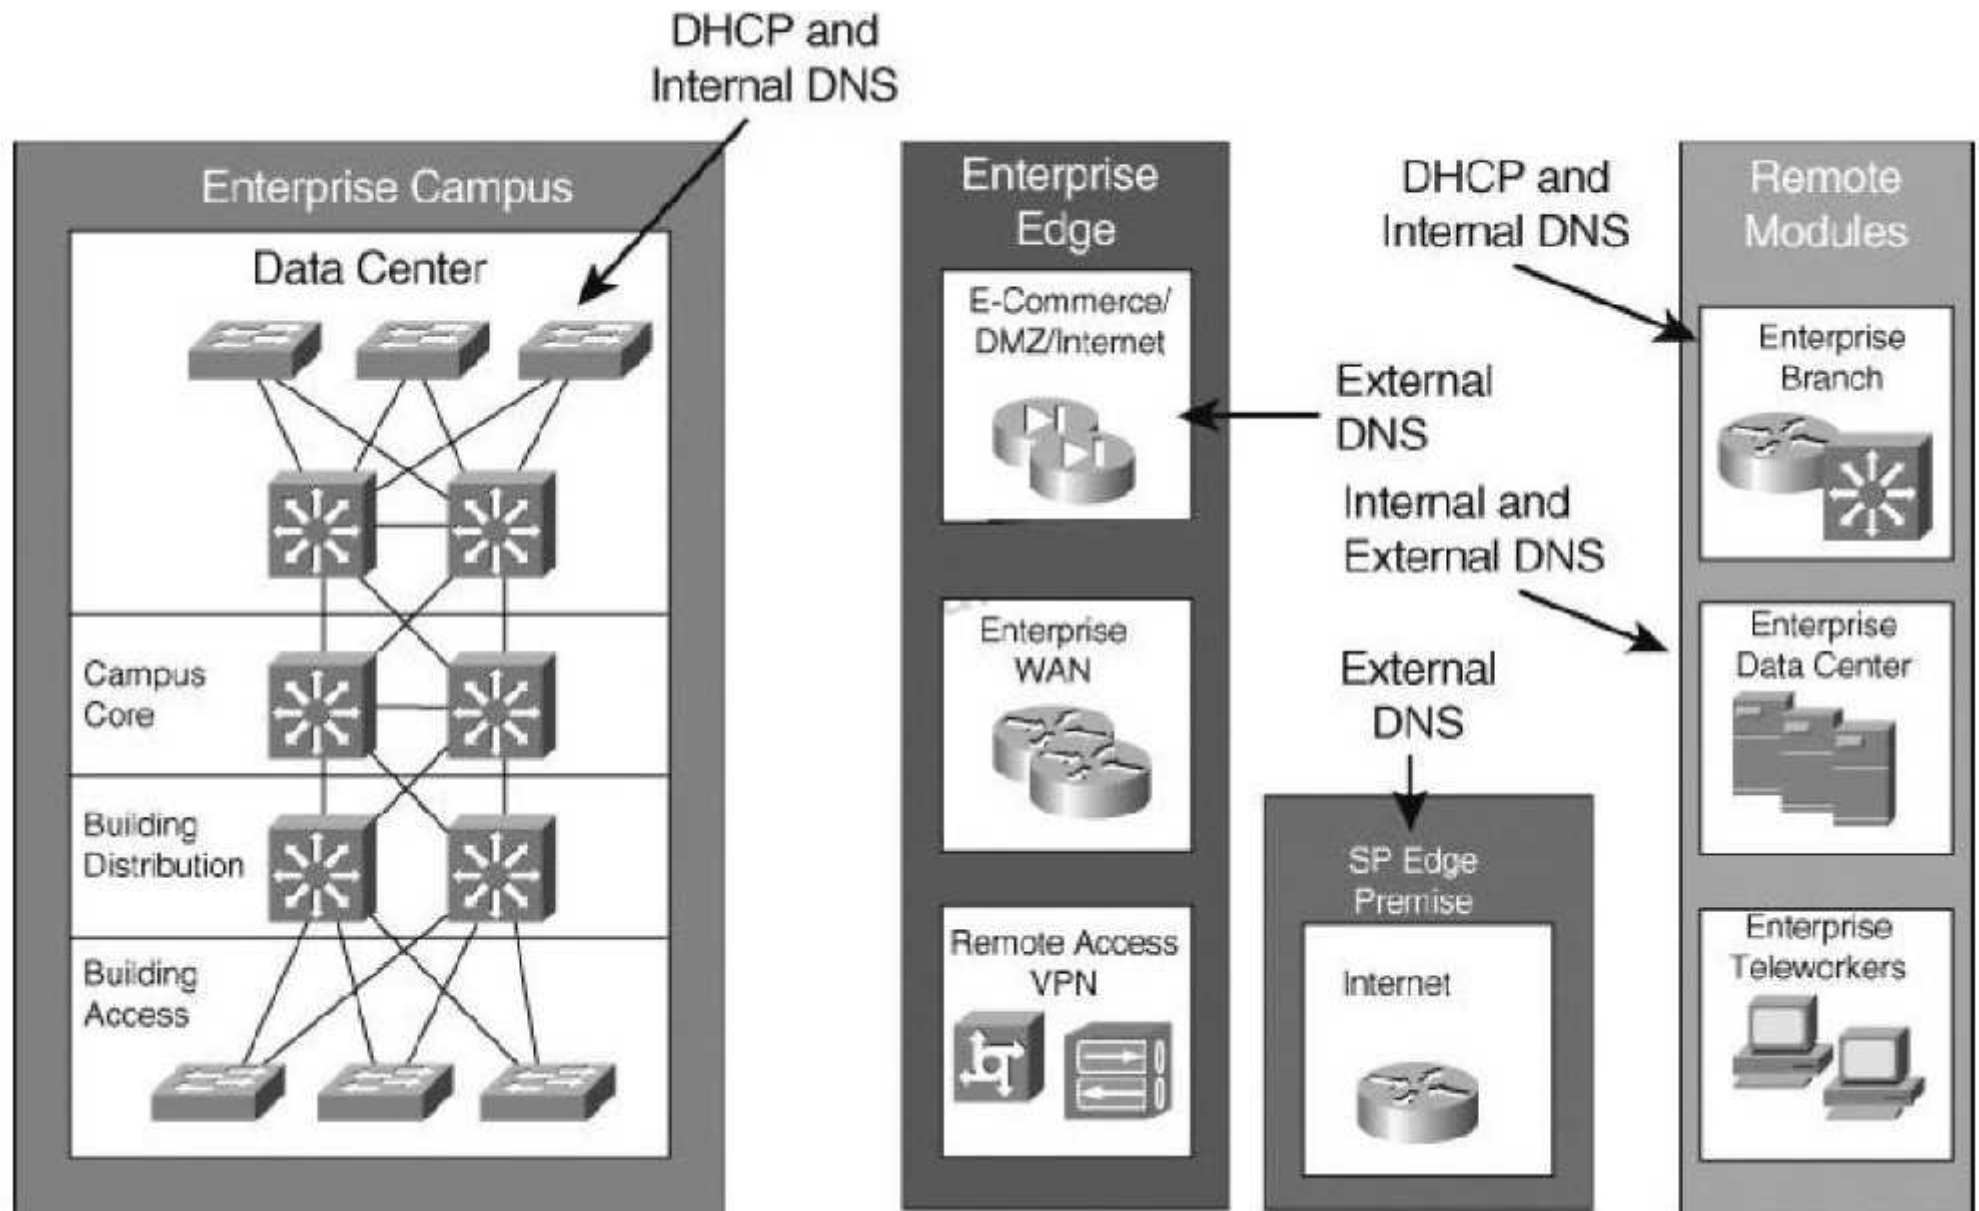

QUESTION 193

Which one of these statements is an example of how trust and identity management solutions should be deployed in the enterprise campus network?

- A. Authentication validation should be deployed as close to the data center as possible.
- B. Use the principle of top-down privilege, which means that each subject should have the privileges that are necessary to perform their defined tasks, as well as all the tasks for those roles below them.
- C. Mixed ACL rules, using combinations of specific sources and destinations, should be applied as close to the source as possible.
- D. For ease of management, practice defense in isolation - security mechanisms should be in place one time, in one place.

Correct Answer: C

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

Validating user authentication should be implemented as close to the source as possible, with an emphasis on strong authentication for access from untrusted networks. Access rules should enforce policy deployed throughout the network with the following guidelines:

- Source-specific rules with any type destinations should be applied as close to the source as possible.
- Destination-specific rules with any type sources should be applied as close to the destination as possible.
- Mixed rules integrating both source and destination should be used as close to the source as possible.

An integral part of identity and access control deployments is to allow only the necessary access. Highly distributed rules allow for greater granularity and scalability but, unfortunately, increase the management complexity. On the other hand, centralized rule deployment eases management but lacks flexibility and scalability.

Practicing "defense in depth" by using security mechanisms that back each other up is an important concept to understand. For example, the perimeter Internet routers should use ACLs to filter packets in addition to the firewall inspecting packets at a deeper level.

Cisco Press CCDA 640-864 Official Certification Guide Fourth Edition, Chapter 13

QUESTION 194

When designing the threat detection and mitigation portion for the enterprise data center network, which of the following would be the most appropriate solution to consider?

- A. 802.1X
- B. ACLs in the core layer
- C. Cisco Security MARS
- D. Cisco Firewall Services Module

Correct Answer: C

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

QUESTION 195

Which of the following is a component within the Cisco Enterprise Campus module?

- A. Teleworker
- B. E-Commerce
- C. Internet Connectivity
- D. Building Distribution
- E. WAN/MAN Site-to-Site VPN

Correct Answer: D

Section: Describe network structure and modularity

Explanation

Explanation/Reference:

Explanation:

QUESTION 196

Which of these statements is true concerning the data center access layer design?

- A. The access layer in the data center is typically built at Layer 3, which allows for better sharing of services across multiple servers.
- B. With Layer 2 access, the default gateway for the servers can be configured at the access or aggregation layer.
- C. A dual-homing NIC requires a VLAN or trunk between the two access switches to support the dual IP addresses on the two server links to two separate switches.
- D. The access layer is normally not required, as dual homing is standard from the servers to the aggregation layer.

Correct Answer: B

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 197

An enterprise campus module is typically made up of four sub modules, as described by the Cisco Enterprise Architecture Model. Which two sub modules are part

of this module?

- A. DMZ
- B. enterprise branch
- C. building distribution
- D. server farm/data center
- E. MAN

Correct Answer: CD

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

QUESTION 198

Your supervisor has asked you to deploy a routing protocol within the lab environment that will allow for unequal cost multipath routing. Which should you choose?

- A. EIGRP
- B. OSPF
- C. IS-IS
- D. RIP

Correct Answer: A

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 199

Which type of area should you use in an enterprise OSPF deployment if you want to prevent propagation of type 5 LSAs but still allow the redistribution of external routes?

- A. stub
- B. totally stubby
- C. backbone
- D. NSSA

E. virtual link

Correct Answer: D

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 200

A hierarchical design of the EIGRP domain facilitates which two of the following? (Choose two.)

- A. route summarization
- B. faster convergence
- C. unequal cost load balancing
- D. redistribution
- E. virtual links

Correct Answer: AB

Section: Design IP Addressing and Routing Protocols

Explanation

Explanation/Reference:

Explanation:

QUESTION 201

Which Cisco device has the sole function at looking at threat detection and mitigation at the Enterprise edge?

- A. Cisco IOS router
- B. Cisco ASA
- C. Cisco Catalyst FWSM
- D. Cisco IPS

Correct Answer: D

Section: Design network services

Explanation

Explanation/Reference:

Explanation:

QUESTION 202

You want to gather as much detail as possible during a network audit, to include data time stamping across a large number of interfaces, customized according to interface, with a minimal impact on the network devices themselves. Which tool would you use to meet these requirements?

- A. RMON
- B. SNMPv3
- C. NetFlow
- D. Cisco Discovery Protocol

Correct Answer: C

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

NetFlow provides extremely granular and accurate traffic measurements and a high-level collection of aggregated traffic. The output of netflow information is displayed via the show ip cache flow command on routers. The Table shows a description of the fields for NetFlow output.

Table. Netflow Output escription

Field	Description
Bytes	Number of bytes of memory that are used by the NetFlow cache
Active	Number of active flows
Inactive	Number of flow buffers that are allocated in the Netflow cache
Added	Number of flows that have been created since the start of the summary
Exporting flows	IP address and UDP port number of the workstation to which flows are exported
Flows exported	Total number of flows export and the total number of UDP datagrams
Protocol	IP protocol and well-known port number
Total Flows	Number of flows for this protocol since the last time that statistics were cleared
Flows/sec	Average number of flows this protocol per second
Packets/flow	Average number of packets per flow per second
Bytes/pkt	Average number of bytes for this protocol
Packets/sec	Average number of packets for this protocol per second

QUESTION 203

Which IPv6 feature enables routing to distribute connection requests to the nearest content server?

- A. Link-local
- B. Site-local
- C. Anycast
- D. Multicast
- E. Global aggregatable

Correct Answer: C

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

Any cast is a network addressing and routing methodology in which data grams from a single sender are routed to the topologically nearest node in a group of potential receivers all identified by the same destination address.

Link: <http://en.wikipedia.org/wiki/Anycast>

QUESTION 204

What is the recommended spanning tree protocol to use for all Layer 2 deployments in a branch office environment?

- A. CST
- B. RSPT
- C. PVST
- D. MISTP
- E. Rapid PVST +

Correct Answer: E

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:

QUESTION 205

Select and Place:

Drag the network function on the left to the functional area or module where it is most likely to be performed in the enterprise campus infrastructure on the right.

aggregates connectivity to voice, video, and data outside the enterprise with QoS and security

provides internal users with external HTTP, FTP, SMTP, and DNS connectivity

enables service-oriented architectures, virtualization, and secure computing with load balancing, redundancy

enables intelligent route and switch, high availability resilient multilayer design and integrated security

supports application traffic through the internet, initiated outside the enterprise network

terminates traffic that is forwarded by the internet connectivity module

Enterprise Campus

Enterprise Edge

E-Commerce

Internet Connectivity

Remote Access and VPN

Data Center

Correct Answer:

Drag the network function on the left to the functional area or module where it is most likely to be performed in the enterprise campus infrastructure on the right.

Enterprise Edge

Internet Connectivity

Data Center

Enterprise Campus

E-Commerce

Remote Access and VPN

Section: Describe network structure and modularity

Explanation

Explanation/Reference:

Explanation:

please refer to link.

Link: <http://www.cisco.com/en/US/docs/solutions/Enterprise/Campus/campover.html#wp708979>

CCDA Study Guide: Diane Teare

QUESTION 206

For which scenario would static IP addressing be most appropriate?

- A. when a given number of IP addresses are expected to change
- B. when a variable number of IP addresses are required per subnet
- C. when a given number of IP addresses need to be reserved for distribution to dial-in clients
- D. when it is desirable to administratively track a given number of IP addresses

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 207

A small state college is planning to improve the performance of their campus network, in particular the dorm network. Which information provided by the college is least relevant to the new design?

- A. location of wiring closets
- B. number of users
- C. applications used
- D. speed of the network

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 208

What does the Enterprise Composite Network Model introduce to the network design process?

- A. hierarchical network design
- B. the concept of core, distribution, and access layers of a network
- C. flattening of the network model for simplicity
- D. modularity within major functions

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 209

You are proposing a multi layer switching solution with multiple paths to a global organization. The proposal is to replace their current non-redundant network of routers. Which three benefits of multi layer switching would you emphasize when you present your proposed design to the organization's board of directors? (Choose three.)

- A. smaller broadcast domains
- B. increased network availability
- C. increased security due to VLAN functionality
- D. increased network performance
- E. fast convergence due to OSPF protocol use
- F. increased throughput due to multiple paths

Correct Answer: BDF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 210

In which three places can a network design be verified and tested? (Choose three.)

- A. a live network
- B. a pilot network
- C. a prototype network
- D. a design network
- E. a trial network
- F. a mock-up network

Correct Answer: ABC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 211

Each column in the table represents characteristics of a routing protocol. Choose one protocol that matches column B and one protocol that matches column E.
(Choose two.)

	Routing Protocol				
	A	B	C	D	E
Convergence Time	slow	fast	slow	fast	fast
VLSM	no	yes	no	yes	yes
Bandwidth Consumption	high	low	high	low	medium
Multi-path Support	not usually	yes	yes	yes	yes
Scales Well	no	yes	yes	yes	yes
Proprietary	no	no	yes	yes	no
Routes Non-IP protocols	no	no	no	yes	yes

- A. OSPF
- B. RIP
- C. ODR
- D. EIGRP
- E. IS-IS
- F. BGP

Correct Answer: BF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 212

Why are the PCM codecs used in Europe and parts of Asia incompatible with those used in North America and Japan?

- A. echo cancellation
- B. code companding
- C. pulse sampling
- D. noise suppression
- E. band limiting

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 213

A good implementation plan that considers the possibility of failure includes which two related principles? (Choose two.)

- A. A successful pilot or prototype is the only way to eliminate the possibility of failure.
- B. A test should be included at every step.
- C. A successful test is the only way to eliminate the possibility of failure.
- D. A detailed procedure to revert to the original setup is necessary for each and every implementation step.
- E. A good implementation plan must eliminate the possibility of failure.
- F. A table of failure points, rollback steps, and estimated rollback times is necessary to eliminate the possibility of failure.

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 214

A prototype network is used to test a proposed network redesign solution. Although the test seemed to be successful, network performance is unacceptable when implemented in the live network. What was wrong with the prototype network test?

- A. The prototype should have been built on the live network.
- B. The prototype failed to test for the proper characteristics.

- C. The prototype network didn't match the live network exactly.
- D. Different configuration parameters existed in the prototype network.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 215

Which Cisco device management feature is most suited to metering network traffic and providing data for billing network usage?

- A. BGP
- B. Cisco Discovery Protocol
- C. QoS
- D. RMON
- E. NetFlow

Correct Answer: E

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 216

Select and Place:

Correct Answer:

Section: (none)

Explanation

Explanation/Reference:

QUESTION 217

DRAG DROP

Select and Place:

Correct Answer:

Section: (none)

Explanation

Explanation/Reference:

Explanation:

a. MIB (Management Information Base)

A MIB is nothing more than a database of objects. The MIB has a tree- like structure, similar to a file system.

Each leaf object represents a parameter on the managed device. A common understanding of the MIB between NMS and agent is what allows SNMP communications to work.

b. SNMP (Simple Network Management Protocol)

Simple Network Management Protocol (SNMP) is the de facto standard network management protocol for the IP protocol suite. Developed in the late 1980s by the IETF (Internet Engineering Task Force), SNMP provides a simple means for vendors to provide management capabilities to their networking devices. SNMP defines a manager/agent relationship for network management. A manager device essentially has two functions: monitor and control. It monitors network devices (agents) by sending queries for performance, configuration, and status information. It controls agents by sending directives to change configuration parameters. An example of an SNMP manager is an NMS (network management station) running CiscoWorks2000, while an agent might be a Cisco 7500 router. The NMS, acting as manager, communicates with the 7500, acting as agent, for information about its performance. SNMP is the protocol they use to communicate. An NMS can manage systems that include hosts, servers, routers, switches, hubs, UPSs, or most any network-attached device. The NMS runs the network management applications, such as CiscoWorks2000, that present management information to network managers and other users. The processing of SNMP is mostly performed by the NMS.

QUESTION 218

Which three options are valid Cisco STP tools used to ensure best-practice access layer design for the enterprise campus? (Choose three.)

- A. Port fast
- B. UDLD
- C. Root Guard
- D. BPDU Guard
- E. Flex Links
- F. SPAN
- G. Ether Channel

Correct Answer: ACD

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

Access layer Limit VLANs to a single closet when possible to provide the most deterministic and highly available topology.

Use RPVST+ if STP is required. It provides the best convergence.

Set trunks to ON and ON with no-negotiate

Manually prune unused VLANs to avoid broadcast propagation. Use VTP Transparent mode, because there is little need for a common VLAN database in hierarchical networks.

Disable trunking on host ports, because it is not necessary. Doing so provides more security and speeds up Port Fast.

Consider implementing routing in the access layer to provide fast convergence and Layer 3 load balancing.

Use Cisco STP Toolkit, which provides Port Fast, Loop Guard, Root Guard, and BPDU Guard.

QUESTION 219

When selecting which hardware switches to use throughout an enterprise campus switched network, which consideration is not relevant?

- A. whether data link layer switching based upon the MAC address is required
- B. the number of shared media segments
- C. which infrastructure service capabilities are required
- D. whether to support Layer 3 services at the network edge

Correct Answer: B

Section: Design Basic Enterprise Campus Networks

Explanation

Explanation/Reference:

Explanation:

Shared media are not used in modern networks; all links are operating full-duplex Link: <http://www.cisco.com/en/US/docs/solutions/Enterprise/Campus/campover.html>

QUESTION 220

Which is part of the Prepare phase of PPDIOO?

- A. Obtain site contact information
- B. Perform network audit
- C. Identify customer requirements
- D. Perform gap analysis

Correct Answer: C

Section: Describe the Methodology used to design a network**Explanation****Explanation/Reference:**

Explanation:

PPDIOO Phase	Description
Prepare	Establishes organization and business requirements, develops a network strategy, and proposes a high-level architecture
Plan	Identifies the network requirements by characterizing and assessing the network, performing a gap analysis
Design	Provides high availability, reliability, security, scalability, and performance
Implement	Installation and configuration of new equipment
Operate	Day-to-day network operations
Optimize	Proactive network management; modifications to the design

Prepare Phase

The Prepare phase establishes organization and business requirements, develops a network strategy, and proposes a high-level conceptual architecture to support the strategy. Technologies that support the architecture are identified. This phase creates a business case to establish a financial justification for a network strategy.

QUESTION 221

Cisco Identity-Based Networking Services relies heavily on the 802.1X protocol. Which other authentication solution is used hand-in-hand with 802.1X to authenticate users for network access?

- A. RADIUS
- B. LEAP
- C. IPsec
- D. TACACS
- E. ISAKMP

Correct Answer: A

Section: Describe the Methodology used to design a network**Explanation**

Explanation/Reference:

Explanation:

Cisco Identity-Based Network Services

The Cisco Identity-Based Network Services solution is a way to authenticate host access based on policy for admission to the network. IBNS supports identity authentication, dynamic provisioning of VLANs on a per-user basis, guest VLANs, and 802.1X with port security. The 802.1X protocol is a standards-based protocol for authenticating network clients by permitting or denying access to the network. The 802.1X protocol operates between the end-user client seeking access and an Ethernet switch or wireless access point (AP) providing the connection to the network. In 802.1X terminology, clients are called supplicants, and switches and APs are called authenticates. A back-end RADIUS server such as a Cisco Access Control Server (ACS) provides the user account database used to apply authentication and authorization. With an IBNS solution, the host uses 802.1X and Extensible Authentication Protocol over LANs (EAPoL) to send the credentials and initiate a session to the network. After the host and switch establish LAN connectivity, username and password credentials are requested. The client host then sends the credentials to the switch, which forwards them to the RADIUS ACS. The RADIUS ACS performs a lookup on the username and password to determine the credentials' validity. If the username and password are correct, an accept message is sent to the switch or AP to allow access to the client host. If the username and password are incorrect, the server sends a message to the switch or AP to block the host port.

Figure 13-4 illustrates the communication flow of two hosts using 802.1X and EAPoL with the switch, AP, and back-end RADIUS server.

QUESTION 222

Which two features are supported by single wireless controller deployments? (Choose two.)

- A. automatic detection and configuration of LWAPPs
- B. LWAPP support across multiple floors and buildings
- C. automatic detection and configuration of RF parameters
- D. Layer 2 and Layer 3 roaming
- E. controller redundancy
- F. mobility groups

Correct Answer: AB

Section: Describe the Methodology used to design a network

Explanation

Explanation/Reference:

Explanation:



<http://www.gratisexam.com/>

<http://www.gratisexam.com/>