

IBM A2010-657 EXAM QUESTIONS & ANSWERS

Number: A2010-657

Passing Score: 800

Time Limit: 120 min

File Version: 21.4



<http://www.gratisexam.com/>



Real Answers to Practice Questions

Exam Code: A2010-657

Exam Name: Assess:IBM Tivoli Netcool/OMNibus V7.4 Implementation

Realtests

QUESTION 1

What is the recommended solution delivery mechanism for Native Event List tools, prompts, and menus?

- A. They are included in the WebGUI configuration.
- B. They should be packaged up using nco_conf pack.
- C. They should be included in the solution delivery SQL file.
- D. They should be documented in the detailed design document but not delivered in the solution delivery package

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 2

What does the nco_pa_status tool display?

- A. the status output from a named Process Agent
- B. the status output from all Process Agents in the installation
- C. process accounting information for the named ObjectServer
- D. process accounting information for all binaries in the IBM Tivoli Netcool/OMNIbus installation

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 3

The username and password for the ObjectServer datasource is configured in which WebGUI configuration file?

- A. \$NCHOME/omnibus_webgui/etc/server.init
- B. \$NCHOME/omnibus_webgui/etc/datasources/ncwDataSource.dtd
- C. \$NCHOME/omnibus_webgui/etc/datasources/ncwDataSource.xml
- D. \$NCHOME/omnibus_webgui/etc/datasources/ncwDataSourceDefinitions.xml

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 4

What is the purpose of the BufferSize probe property (common to all probes)?

- A. It tells a probe how much memory to allocate for its internal buffers.
- B. It tells a probe the size of the buffer to use when reading alerts from its data source.
- C. It tells a probe the maximum number of alerts to buffer before flushing them to the destination ObjectServer

(s).

- D. It tells a probe the maximum number of alerts to have awaiting processing by the rules file. Events received when the buffer is full are discarded automatically.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 5

Which two actions are required when configuring a CGI script to use via a WebGUI tool? (Choose two.)

- A. ensure the script is writeable
- B. ensure the script is executable
- C. save the CGI script on the Web GUI server in the \$NCHOME/etc/cgi-bin directory
- D. save the CGI script on the Web GUI server in the \$OMNIHOME/etc/cgi-bin directory
- E. save the CGI script on the Web GUI server in the \$NCHOME/omnibus_webgui/etc/cgi-bin directory

Correct Answer: BE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 6

Which two statements are true regarding Group Filters in WebGUI V7.4? (Choose two.)



<http://www.gratisexam.com/>

- A. Only a single copy of the filter is needed.
- B. Only users with ncw_admin role can add group filters.
- C. User retains a copy of the filter when leaving the group.
- D. Global, system, user filters can depend on group filters.
- E. Allows users to share filters based on their membership.

Correct Answer: AE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 7

What is taken into consideration while calculating sizing for a server that will only run an IBM Tivoli Netcool/OMNIbusObjectServer?

- A. number of operator users configured
- B. number of WebGUI maps configured
- C. number of custom SQL triggers configured
- D. number of Process Control agents configured within the solution

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 8

A company is using Federated Repository with 3 LDAP servers defined. Users and groups are synced to the ObjectServer. Some users cannot log in to the Tivoli Integrated Portal. The SystemOut.log shows this exception:

```
[1/23/13 12:44:03:743 CST] 000000b5 exception E com.ibm.ws.wim.ProfileManager loginImpl  
com.ibm.websphere.wim.exception.DuplicateLogonIdException: CWWIM4538E Multiple principals were found  
for the 'jsmith' principal name.
```

What can the administrator do to prevent the error?

- A. use one LDAP server only
- B. switch users.credentials.sync to False
- C. ensure usernames are unique across repositories
- D. use different value for users.credentials.sync.groupname

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 9

Which role is required to administer groups and roles in IBM Tivoli Netcool/OMNIBus V7.4 WebGUI?

- A. iscadmins
- B. nco_admin
- C. configurator
- D. administrator

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 10

Which statement is true about a signal trigger?

- A. It is executed repeatedly based on a specified frequency.
- B. It can only be executed if the system is running under process control.

- C. It can only be executed before or after an event is updated in the ObjectServer.
- D. It responds to changes detected within the IBM Tivoli Netcool/OMNIBus processes

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 11

Which three methods can be used to improve the resiliency of the IBM Tivoli Netcool/OMNIBus deployment?
(Choose three.)

- A. deploying ObjectServers in pairs
- B. configuring and maintaining single sign-on capability
- C. deploying a second probe in peer-to-peer mode for any running probe
- D. using a probe raw capture file to determine the raw data reaching a probe
- E. setting up a cluster of Web GUI servers and then enabling Web GUI load balancing
- F. enabling multiple logins to allow multiple users to log in using the same user ID and password

Correct Answer: ACE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 12

What is the only environment variable that has to be set to start the Display ObjectServer?

- A. NCHOME
- B. OMNI_HOME
- C. JAVA_HOME
- D. LD_LIBRARY_PATH

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 13

An ObjectServer is being configured with High Availability.
The primary ObjectServer, called LONDON_P, is configured on servera.
The backup ObjectServer, called LONDON_B, is configured on serverb.
The synchronizer gateway, called LONDON_GATE, is installed on serverb.
Neither of the ObjectServers is running in Secure Mode.

The goal is a configuration that implements ObjectServer failover and fallback in the most efficient manner and in accordance with standard Best Practices. Which statement is true about configuring ObjectServer users in the LONDON_GATE property file?

- A. Different ObjectServer user names can be used for each ObjectServer.
- B. ObjectServer user names and passwords are not required in the gateway property file.
- C. The password value entered in the gateway property file for the ObjectServer users must be encrypted using thenco_g_crypt Utility.
- D. The same ObjectServer user name configured in the gateway property file must be defined in the LONDON_P and LONDON_B ObjectServers.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 14

When developing several new pages in a sandbox dev/test system for the WebGUI, the work is ready to migrate to production during a change control. How is the migration performed?

- A. use a series of tipcli.sh import and export commands
- B. migrate the files in tip_home_dir/profiles/TIPProfile/output to the new system
- C. use the import/ export wizard in the Settings page of the WebGUI as an administrator
- D. create a tar file of the appropriate files in tip_home_dir/profiles/TIPProfile/etc/pages; transfer the tar file to the new system and untar in the same location

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 15

Click the Exhibit button.

New External Procedure (NCOMS on IBM-7LMK1VRCFDB:4100)

External Procedure Details

Name:

Parameters:

In/Out: Name: Data Type: Array: ☐

Executable:

Arguments:

Host:

User ID: Group ID:

When creating a new external procedure in the ObjectServer, which hostname should be listed as the Host parameter?

- A. localhost
- B. the ObjectServer hostname
- C. the local Process Agent name
- D. the hostname where the executable will be run

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 16

During an ObjectServer upgrade it is determined that AES encryption was used. What must be done to the upgrade to comply with FIPS 140?

- A. keys will work with AES encryption for FIPS 140
- B. decrypt everything with nco_aec_crypt with the -d option, then encrypt with nco_keygen -keyfile <filelocation>
- C. decrypt everything with nco_aec_de crypt, then re-encrypt with nco_keygen and nco_aes_crypt to store the keys in the proper keyfile

- D. decrypt everything with nco_aes_crypt with the -d option, then re-encrypt with nco_keygen and nco_aes_crypt to store the keys in the proper keyfile

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 17

Which data does the nco_os report tool export in a variety of formats?

- A. all data from an ObjectServer
- B. operating system performance data
- C. only configuration data from an ObjectServer
- D. configuration data of an IBM Tivoli Netcool/OMNIbus installation

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 18

An ObjectServer is being configured with High Availability.
The primary ObjectServer, called LONDON_P, is configured on servera.
The backup ObjectServer, called LONDON_B, is configured on serverb.
The synchronizer gateway, called LONDON_GATE, is installed on serverb.
Neither of the ObjectServers is running in Secure Mode.

The goal is a configuration that implements ObjectServer failover and fallback in the most efficient manner and in accordance with standard Best Practices. Which statement correctly describes the use of the primary_only Trigger Group?

- A. The primary_only Trigger Group is only defined in the LONDON_P ObjectServer.
- B. The primary_only Trigger Group is only defined in the LONDON_B ObjectServer.
- C. The primary_only Trigger Group is always enabled in the LONDON_B ObjectServer.
- D. The primary_only Trigger Group is only enabled in the LONDON_B ObjectServer when LONDON_P is down.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 19

What are the steps to clone an ObjectServer?

- A. It is not possible to exactly clone an ObjectServer.

- B. Export the ObjectServer configuration into SQL files with nco_conf pack. Run the SQL files using nco_sqlto createthe new ObjectServer.
- C. Export the ObjectServer configuration into SQL files with nco_os report. Use the SQL files to create a newObjectServer with nco_dbinit.
- D. Export the ObjectServer configuration into SQL files with nco_conf pack. Use the SQL files to create a newObjectServer with nco_dbinit.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 20

What is the difference between the hash and tree database index structure?

- A. The hash index can only be used on INTEGER columns. The tree index can be used on any column data type.
- B. The tree index can only be used on VARCHAR columns. The hash index can be used on any column data type.
- C. The hash index supports equality comparisons in SQL queries. The tree index is an ordered index that stores columnvalues in a sorted structure.
- D. The hash index is an ordered index that stores column values in a sorted structure. The tree index supports equalitycomparisons in SQL queries.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 21

An administrator would like to give a group of users access to an Active Event List in IBM Tivoli Netcool/OMNibus V7.4 WebGUI but keep them from using right-click tools. Which role should be used?

- A. ncw_user
- B. netcool_ro
- C. netcool_nt
- D. netcool_rw

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 22

These IBM Tivoli Netcool/OMNibus profile statistics were collected with a granularity period of 60 seconds:

[1] Mon Jan 7 17:39:46 2013: Individual user profiles:
 [2] Mon Jan 7 17:39:46 2013: 'Administrator' (uid = 0) time on adminhost: 0.000000s
 [3] Mon Jan 7 17:39:46 2013: 'isql' (uid = 0) time on omnihost1.ibm.com: 3.770000s
 [4] Mon Jan 7 17:39:46 2013: 'PROBE' (uid = 0) time on probehost.ibm.com: 5.010000s
 [5] Mon Jan 7 17:39:46 2013: 'e@c0B4D@c0142:11.0' (uid = 0) time on omnihost1.ibm.com: 2.010000s
 [6] Mon Jan 7 17:39:46 2013: 'c@xxxx@xxxx:11.0' (uid = 45) time on omnihost1.ibm.com: 0.000000s
 [7] Mon Jan 7 17:39:46 2013: 'e@c0B4D@c0142:11.0' (uid = 45) time on omnihost1.ibm.com: 3.870000s
 [8] Mon Jan 7 17:39:46 2013: 'c@xxxx@xxxx:11.0' (uid = 55) time on omnihost1.ibm.com: 0.000000s
 [9] Mon Jan 7 17:39:46 2013: 'e@c0B4D@c0142:11.0' (uid = 55) time on omnihost1.ibm.com: 6.020000s
 [10] Mon Jan 7 17:39:46 2013: 'GATEWAY' (uid = 0) time on omnihost1.ibm.com: 0.270000s
 [11] Mon Jan 7 17:39:46 2013: 'GATEWAY' (uid = 0) time on omnihost1.ibm.com: 0.000000s
 [12] Mon Jan 7 17:39:46 2013: 'PROBE' (uid = 0) time on omnihost1.ibm.com: 3.010000s
 [13] Mon Jan 7 17:39:46 2013: Grouped user profiles:
 [14] Mon Jan 7 17:39:46 2013: Execution time for all connections whose application name is 'PROBE': 28.000000s
 [15] Mon Jan 7 17:39:46 2013: Execution time for all connections whose application name is 'GATEWAY': 0.000000s
 [16] Mon Jan 7 17:39:46 2013: Execution time for all connections whose application name is 'c@xxxx@xxxx:11.0': 0.000000s
 [17] Mon Jan 7 17:39:46 2013: Execution time for all connections whose application name is 'e@c0B4D@c0142:11.0': 5.930000s
 [18] Mon Jan 7 17:39:46 2013: Execution time for all connections whose application name is 'isql': 3.770000s
 [19] Mon Jan 7 17:39:46 2013: Execution time for all connections whose application name is 'Administrator': 0.000000s
 [20] Mon Jan 7 17:39:46 2013: Total time in the report period (59.275782s): 29.980000s

What should be the first action to optimize the ObjectServer performance?

- A. limit access for users to run ISQL queries
- B. analyze client filters and make them more efficient
- C. analyze the number of gateway connections and drop connections not in use
- D. analyze and correct probe rulesfile so that unnecessary events or event details will not be forwarded to the ObjectServer

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 23

A customer would like to migrate a WebGUI V7.3.1 scenario running TIP V2.1 to the a WebGUI V7.4 configuration running on another server Following a successful export of data from the source V7.3.1 system, they cannot find the resulting data file. Where would this file be generated?

- A. inthetip_home_dir/profiles/TIPProfile/logs directory
- B. in the tip_home_dir/profiles/TIPProfile/output directory
- C. in the \$NCHOME/omnibus_webgui/integration/migration_tool directory
- D. in the \$NCHOME/omnibus_webgui/integration/importexport_tool directory

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 24

Which two statements are true about configuring probes to use failover IBM Tivoli Netcool Proxy Servers? (Choose two.)

- A. The probe's IsProxyConnection property should be set to 1.
- B. The probe's PeerHost property should be set to point at the backup proxy server.
- C. The probe's PeerHost property should be set to point at the primary proxy server.
- D. The probe's Server property should be configured to point at the primary proxy server.
- E. The probe's ServerBackup property should be configured to point at the backup proxy server.

Correct Answer: DE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 25

What is the default Windows path where IBM Tivoli Netcool/OMNIBUS V7.4 is installed?

- A. C:\IBM\netcool
- B. C:\IBM\Tivoli\netcool
- C. C:\ProgramFiles\IBM\netcool
- D. C:\Program Files\micromuse\netcool

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 26

What is one of the first steps that the WebGUI administrator should do when creating a new page for a user?

- A. define the page wires for the different workspaces
- B. set the page location, source URL, and tools accessibility
- C. set the page properties, roles, layouts, and levels of access
- D. define the user access groups for each workspace on the page

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 27

Which three software components are required for a WebGUI Load Balancing cluster? (Choose three)

- A. process agent

- B. IBM HTTP Server
- C. IBM DB2 database
- D. bi-directional gateway
- E. IBM Load Balancing Gateway
- F. IBM Tivoli Netcool/OMNIbus WebGUI Cluster nodes

Correct Answer: BCF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 28

A customer has a requirement that events must be obtained from an application. The events are to be sourced from a log file - one event per line. Which two probes could be used to do this? (Choose two)

- A. EIF Probe
- B. GLF Probe
- C. Syslog Probe
- D. Socket Probe
- E. Syslogd Probe

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 29

What is the effect of this command?

```
%OMNIHOME%\bin\nco_probeeventfactory.cmd -host servername.ibm.com -port 2020 AlertGroup=Netcool  
Manager=mttrapd Host=testserver.ibm.com Severity=l
```

- A. It sends a request to update the remote Probe Rules file with the listed event field values.
- B. It sends a request to update the remote Probe properties file with the listed event field values.
- C. It generates an event with the listed event field values to a probe whose host is testserver.ibm.com.
- D. It generates an event with the listed event field values to a probe whose host is servername.ibm.com.

Correct Answer: D

Section: (none)


Explanation

Explanation/Reference:

Explanation:

QUESTION 30

Click the Exhibit button.

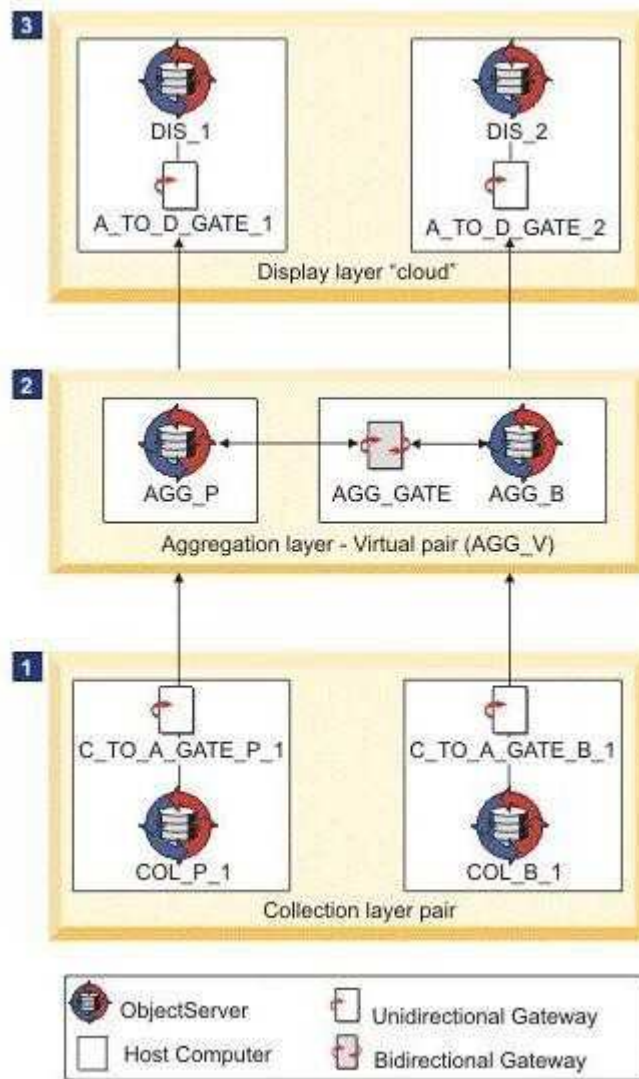

Widgetcom has deployed this 3-tier standard multi-tier architecture deployment of IBM Tivoli Netcool/OMNIBus V7.4 (Netcool/OMNIBus) using the best practice configuration that ships with the product:

Assuming all Netcool/OMNIBus components have been set up in accordance with best practices, which two commands can be used to verify that the various components are up and running? (Choose two)

- A. nco_ping
- B. nco_postimsg
- C. nco_osreport
- D. nco_pa_status
- E. nco_check_store

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 31

A consultant is working on an IBM Tivoli Netcool/OMNIBus V7.2.1 ObjectServer upgrade to V7.4.
Which high level steps migrate the key database?

- A. move the omni.kdb file to a temporary location, create a new key database with nc_gskcmd, import the certificates
- B. export the omni.kdb file to a flat file with nco_g_crypt -d, create a new key database with nc_gskcmd, import the certificates
- C. move the omni.kdb to a temporary location, perform the upgrade, move the omni.kdb into the \$NCHOME/etc/security/keys directory
- D. move the omni.kdb file to a temporary location /<temp location/ and create a new key database with nc_gskcmd with the-load /<temp location>/omni.kdb

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 32

A company wants to back up their IBM Tivoli Netcool/OMNIBus database, TIP pages, and WebGUI components. Examine these files and outputs:

- Partial OMNIBusWebGUI_clone_settings.properties

```
##### Web GUI product home directory settings #####
# A full path (including drive letter or volume) to a directory
# where product (OMNIBus Web GUI) files are.
# If not defined (default), product home directory is <tip_v2_dir>./netcool/omnibus_webgui
# In case of Windows system, please escape \ characters by using \\
# e.g. C:\IBM\tivoli\netcool\omnibus_webgui
#####
#product.home=C:\IBM\tivoli\netcool\omnibus_webgui
product.home=/opt/IBM/tivoli/netcool/omnibus_webgui
```

- Partial /opt/IBM/tivoli/netcool/omnibus_webgui/integration/plugins/OMNIBusWebGUI_TIP_clone.properties

```
#additional properties in another file
customPropertiesFile=OMNIBusWebGUI_clone_settings.properties
```

Run Export:

```

$ /opt/IBM/tivoli/tipv2/profiles/TIPProfile/bin/tipcli.sh Export --username tipadmin --password netcool --
settingFile /opt/IBM/tivoli/netcool/omnibus_webgui/integration/plugins/OMNibusWebGUI_TIP_clone.properties
CTGWA4159W Extra parameter: ExportWebGUIPlugin.ignore will be passed to plug-ins.
CTGWA4159W Extra parameter: ImportViewPlugin.ignore will be passed to plug-ins.
CTGWA4159W Extra parameter: ServerInitImportPlugin.output will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportWebResourcePlugin.output will be passed to plug-ins.
CTGWA4159W Extra parameter: WAAPInitImportPlugin.input will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportViewPlugin.output will be passed to plug-ins.
CTGWA4159W Extra parameter: ImportWebGUIPlugin.ignore will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportFilterPlugin.output will be passed to plug-ins.
CTGWA4159W Extra parameter: ImportWebGUIPlugin.input will be passed to plug-ins.
CTGWA4159W Extra parameter: ImportViewPlugin.input will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportWebResourcePlugin.input will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportWebGUIPlugin.input will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportFilterPlugin.user will be passed to plug-ins.
CTGWA4159W Extra parameter: DCISecurityImportPlugin.input will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportWebGUIPlugin.output will be passed to plug-ins.
CTGWA4159W Extra parameter: components will be passed to plug-ins.
CTGWA4159W Extra parameter: ServerInitImportPlugin.input will be passed to plug-ins.
CTGWA4159W Extra parameter: WAAPInitImportPlugin.ignore will be passed to plug-ins.
CTGWA4159W Extra parameter: UUID will be passed to plug-ins.
CTGWA4159W Extra parameter: ImportFilterPlugin.input will be passed to plug-ins.
CTGWA4159W Extra parameter: ServerInitImportPlugin.ignore will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportViewPlugin.user will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportViewPlugin.system will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportWebResourcePlugin.ignore will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportFilterPlugin.system will be passed to plug-ins.
CTGWA4159W Extra parameter: password will be passed to plug-ins.
CTGWA4159W Extra parameter: ImportWebResourcePlugin.input will be passed to plug-ins.

CTGWA4159W Extra parameter: username will be passed to plug-ins.
CTGWA4159W Extra parameter: product.home will be passed to plug-ins.
CTGWA4159W Extra parameter: TIP.cellName will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportViewPlugin.global will be passed to plug-ins.
CTGWA4159W Extra parameter: DCISecurityImportPlugin.output will be passed to plug-ins.
CTGWA4159W Extra parameter: ImportWebGUIPlugin.output will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportFilterPlugin.global will be passed to plug-ins.
CTGWA4159W Extra parameter: TIP.profileName will be passed to plug-ins.
CTGWA4159W Extra parameter: ExportFilterPlugin.groups will be passed to plug-ins.
CTGWA4159W Extra parameter: WAAPInitImportPlugin.output will be passed to plug-ins.
CTGWA4159W Extra parameter: ImportFilterPlugin.ignore will be passed to plug-ins.
The data was successfully exported to the directory /opt/IBM/tivoli/tipv2/profiles/TIPProfile/output/data.zip
CTGWA4017I The command completed successfully.
$

```

Given that the administrator has only modified the product.home property in OMNibusWebGUI_clone_settings.properties in the new IBM Tivoli Netcool/OMNibus V7.4, which two statements are true? (Choose two.)

- A. TIP pages, and WebGUI components are exported.
- B. Only data from product.home are exported in data .zip.
- C. The TIP pages, WebGUI components, and OMNibus DB are exported.
- D. The TIP server should be running prior to executing the export command.
- E. Data from product.home and ObjectServer DB are included in the exported data.zip.

Correct Answer: AD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 33

A company is deploying a multi-tiered architecture with a collection, aggregation, and display layers. Which steps are required to create a pair of collection layer ObjectServers?

- A. Configure the omni.dat or Server Editor and generate the interfaces file for COL_P_1, COL_B_1 and COL_V_1Edit the properties file for COL_P_1 and COL_B_1 to specify the ObjectServers as collection ObjectServers.Start the ObjectServers COL_P_1 and COL_B_1.
- B. Configure the omni.dat or Server Editor and generate the interfaces file for COL_P_1, COL_B_1 and COL_V_1Run nco_dbinit with the -customconfigfile option to load the collection.sql.Start the ObjectServers COL_P_1, COL_B_1 and COL_V_1.
- C. Configure the omni.dat or Server Editor and generate the interfaces file for COL_P_1, COL_B_1 and COL_V_1Start the ObjectServers COL_P_1 and COL_B_1.
- D. Configure the omni.dat or Server Editor and generate the interfaces file for COL_P_1, COL_B_1 and COL_V_1Run nco_dbinit with the -customconfigfile option to load the collection.sql to initialize the ObjectServers.Start the ObjectServers COL_P_1 and COL_B_1.

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 34

Which two directories should be backed up before the upgrade in place from IBM Tivoli Netcool/OMNibus (Netcool/OMNibus) V7.3.1 and TIP V2.2 to Netcool/OMNibus V7.4 on a Redhat Linux system? (Choose two)

- A. opt/IBM/db2
- B. opt/IBM/tivoli/profiles
- C. opt/IBM/tivoli/netcool
- D. opt/IBM/tivoli/tpv2Components
- E. opt/IBM/tivoli/netcool/omnibus_webgui

Correct Answer: DE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 35

What is the default URL when logging in to a newly installed WebGUI on 10.1.1.10?

- A. http://10.1.1.10:16310/
- B. http://10.1.1.10/ibm/console
- C. http://10.1.1.10:16310/ibm/console
- D. https://10.1.1.10:16310/ibm/console

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 36

Which three statements are true regarding adding and editing table columns in an ObjectServer? (Choose three.)

- A. PRIMARY KEY columns can be added to existing tables.
- B. PRIMARY KEY columns cannot be added to existing tables.
- C. The maximum number of columns in a table is 512 excluding the system-maintained columns.
- D. The maximum number of columns in a table is 1024 excluding the system-maintained columns.
- E. The maximum row size for a table, which is the sum of the length of the columns in the row, is 64 KB.
- F. The maximum row size for a table, which is the sum of the length of the columns in the row, is 256 KB.

Correct Answer: BCE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 37

The MessageLevel specifies the message logging level in an ObjectServer properties file. What is the default level?

- A. info
- B. fatal
- C. error
- D. warn

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 38

A company has a virtual pair of ObjectServers with the primary located in New York (ny.fqdn.com 4100), the backup in Sacramento (sac.fqdn.com 4100), and the WebGUI is in San Francisco (sf.fqdn.com 16311). The administrator has these requirements:

Which WebGUI role should be assigned to the users so they can create filters?

- A. ncw_user
- B. netcool_ro

- C. nco_admin
- D. ncw_dashboard

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 39

IBM Tivoli Netcool/OMNIBus V7 4 core components are being installed on a server running 64-bit SUSE Linux. The server hardware consists of 8 CPUs (2.4 GHz), 16 GB RAM, and 2500 GB disks. The software will be installed using the Typical installation option. The IBM Prerequisite Scanner should be run on this system to ensure what is correct on the server?

- A. the correct kernel parameters
- B. the correct user to perform the installation
- C. the correct hardware, operating system, and software
- D. the correct host name, DNS resolution, and port availability

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 40

When should the use of ObjectServer table indexes be considered for an IBM Tivoli Netcool/OMNIBus deployment?

- A. A new event field is added to the ObjectServer database alerts.status table.
- B. A one-off scan will be carried out on a non-indexed field in a small ObjectServer table.
- C. A non-indexed field is used extensively within ObjectServer triggers,tools, or procedures.
- D. A necessary, frequent scan will be carried out on a non-indexed field in a small ObjectServer table.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 41

Which three areas are checked on the target host by the IBM Prerequisite Scanner Utility for IBM Tivoli Netcool/OMNIBus? (Choose three)

- A. DVD drive
- B. disk space
- C. database compatibility
- D. network adapter speed
- E. supported operating system
- F. required third party packages

Correct Answer: BEF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 42

What does the nco_setpropeprop command modify?

- A. the default location of the property file for a specified probe
- B. the value of the specified property of a probe via the probe's HTTP interface
- C. the value of the specified property in the property file for the specified probe
- D. the value of the specified property in all probe property files in the installation

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:



<http://www.gratisexam.com/>

QUESTION 43

What is the default location of the ObjectServer, probe, and gateway log files?

- A. \$NCHOME/log
- B. \$NCHOME/probes/log
- C. \$NCHOME/omnibus/log
- D. \$OMNIHOME/omnibus/log

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 44

The installation script to install an ObjectServer on a Redhat Linux system has completed. The syslog probe will not start when running pad. How should the nco_pa.conf file be modified?

```

nco_process 'ObjectServer'
{
  Command '$NCHOME/omnibus/bin/nco_objserv -name NETCOOLPRI -pa NCOOS_PA' run as 0
  Host='nchost01'
  Managed=true
  RestartMsg='The ObjectServer has been restarted'
  AlertMsg='The ObjectServer has gone down'
  RetryCount=0
  ProcessType=PaPA_AWARE
}
nco_process 'SyslogProbe'
{
  Command '$NCHOME/omnibus/probes/nco_p_syslog' run as 0
  Host='nchost01'
  Managed=true
  RestartMsg='The Syslog Probe has been restarted'
  AlertMsg='The Syslog Probe has gone down'
  RetryCount=0
  ProcessType=PaPA_AWARE
}

nco_service 'Omnibus'
{
  ServiceType=Master
  ServiceStart=Auto
  process 'ObjectServer' NONE
}
nco_routing
{
  host 'nchost01' 'NCOOS_PA'
}

```

- A. start the pad process as the netcool user.
- B. add host'nchostor '512' after the host'nchostor 'NCOOS_PA' line in the nco_routing section
- C. after the line, process 'ObjectServer' NONE, in nco_service, add process 'SyslogProbe' 'ObjectServer'
- D. change the run as 0 statement at the end of the line Command '\$NCHOME/omnibus/probes/nco_p_syslog' run as 0 torun as netcool because of the protected port

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 45

Which three statements are true regarding a WebGUI load balancing cluster? (Choose three.)

- A. An IBM DB2 database is required.
- B. If a node within a cluster fails, new user sessions are directed to other active nodes.

- C. WebGUI load balancing can be configured as an option during WebGUI installation if a database is available.
- D. If a node in the cluster fails, active sessions on that node are automatically transferred to other active nodes.
- E. If a node in the cluster fails, users who are in session with that node must log back in to access the WebGUI.
- F. If a node in the cluster fails, users who are in session with that node are automatically directed to other active nodes

Correct Answer: ABE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 46

Server communication for an admin client can be set up in which three ways? (Choose three.)

- A. run nco_xigen in UNIX/Linux
- B. use the Servers Editor in Windows
- C. manually edit the sql.ini in Windows
- D. manually edit the interfaces.[arch] file
- E. add servers to system environment variables
- F. select Add Server in the Administrator Client

Correct Answer: ABC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 47

What is the effect of setting these ObjectServer properties prior to starting the ObjectServer?

NHtpd.EnableHTTP : TRUE

NHtpd.ListeningPort : 8080

- A. It defines whether the embedded HTTPD server will serve files from its document root.
- B. It configures the embedded HTTP server so that the interfaces are active on an HTTP port (8080).
- C. It configures the embedded HTTP server so that the interfaces are active on an HTTPS port (8080).
- D. IT defines the security realm name of the basic HTTP authentication value that is returned to a HTTP request in a HTTP(401) response when invalid or no credentials are provided.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 48

Which statement correctly describes what occurs when the Maintain History option is selected in the Accelerated Event Notification (AEN) client property settings?

- A. A log file is created which contains a record of all AEN messages received by the client.
- B. It prevents the AEN pop-up message from being automatically removed from the desktop.
- C. A copy of each message received by the client is retained, and the message maybe recalled.
- D. A journal entry is created for the corresponding event in the ObjectServer when the message is received by the AENclient.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 49

Which two environment variables are set on a Windows platform following a successful installation of IBM Tivoli Netcool/OMNIbus? (Choose two)

- A. NCHOME
- B. TIP_HOME
- C. OMNIHOME
- D. NETCOOL_HOME
- E. LD_LIBRARY_PATH

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 50

Which command checks the rules file syntax for the mttrapd.rules file?

- A. nco_syntax mttrapd.rules
- B. nco_p_syntax mttrapd.rules
- C. nco_syntax -rulesfile mttrapd.rules
- D. nco_p_syntax -rulesfile mttrapd.rules

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 51

The network operation center has two groups of users that use the native desktop One group, OPERATIONS, requires access to the standard event management tools like acknowledge and delete. They also require access to some custom tools for things like basic troubleshooting (ping and telnet) and ticket creation. The second group, NETWORK, requires access to the same tools used by the OPERATIONS group users. In addition, there are a few tools used for advanced router diagnostics that they use. These tools are not to be available to the OPERATIONS group users. To minimize administration efforts a common desktop menu is used for both groups of users.

The RouterDiag tool, used by NETWORK users, is defined in a menu called DiagTools. The tool is only used for Acme routers. The Acme routers produce SNMP traps, which are converted to events by the MTTrapd

probe. Which option limits this tool for use with only Acme routers?

- A. configure the mttrapd.rules file to populate the alerts.status Class column with the value 9999; configure the RouterDiagtool to limit access to only the 9999 Class
- B. configure the mttrapd.rules file to populate the alerts.status Class column with the value 9999; configure the DiagToolsmenu to limit access to only the 9999 Class
- C. configure the mttrapd.rules file to populate the alerts.status Group column with the value ACME; configure the RouterDiag tool to limit access to only the ACME Group
- D. configure the mttrapd.rules file to populate the alerts.status Group column with the value NETWORK; configure the RouterDiag tool to limit access to only the Network Group

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 52

The probe HTTP interface is disabled by default It can be enabled by setting a set of properties Which two properties must be configured to enable the probe HTTP interface? (Choose two)

- A. NHttpd.BasicAuth
- B. NHttpd.EnablePort
- C. NHttpd.EnableHTTP
- D. NHttpd.ListeningPort
- E. NHttpd.ListeningHTTP

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 53

A company wants to integrate LDAP with the WebGUI server. The system administrator, with the assistance of their LDAP admin, have configured the system to a point where they can view groups in Manage Groups and users in Manage Users. They have assigned ncw* roles to the groups, however, the LDAP users and groups are not synchronized to the ObjectServer. Which two WebGUI files do they need to check to troubleshoot this problem? (Choose two.)

- A. server.init
- B. ldap.props
- C. wimconfig.xml
- D. fileRegistry.xml
- E. dci-security.properties

Correct Answer: AE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 54

In the multi-tiered architecture, when an event is reinserted from the collection to the aggregation layer, what is the default deduplication behavior for severity?

- A. The severity is changed only if the incoming severity is higher than the existing severity.
- B. The Severity field is always updated on deduplication. The severity from the collection layer will overwrite the severity at the aggregation layer.
- C. The Severity field is never updated on deduplication. The severity from the collection layer is dropped and the severity at the aggregation layer is kept unchanged.
- D. Only closed events are reawakened on deduplication. The severity is changed only if the old severity is 0 (clear) and the new severity is greater than 0 (not clear).

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 55

A company has a pair of primary and backup aggregation ObjectServers AGG_P and AGG_B. Due to additional probe load, two collection layer ObjectServers need to be deployed. How can the architecture be changed to multi-tiered?

- A. Additional components can be added to the multi-tiered architecture. Create two new collection ObjectServers with two unidirectional collection to aggregation routing gateways.
- B. Additional components can be added to the multi-tiered architecture. Create two new collection ObjectServers with two unidirectional collection to aggregation routing gateways and a bidirectional failover Collection gateway.
- C. All layers of the multi-tiered architecture must be deployed at one time. Create two new aggregation ObjectServers with a bidirectional failover aggregation gateway. Create two new collection ObjectServers with unidirectional collection to aggregation routing gateways.
- D. All layers of the multi-tiered architecture must be deployed at one time. Create two new aggregation ObjectServers with a bidirectional failover aggregation gateway. Create two new collection ObjectServers with unidirectional collection to aggregation routing gateways and a bidirectional failover collection gateway.

Correct Answer: A

Section: (none)


Explanation

Explanation/Reference:

Explanation:

QUESTION 56

Click the Exhibit button.

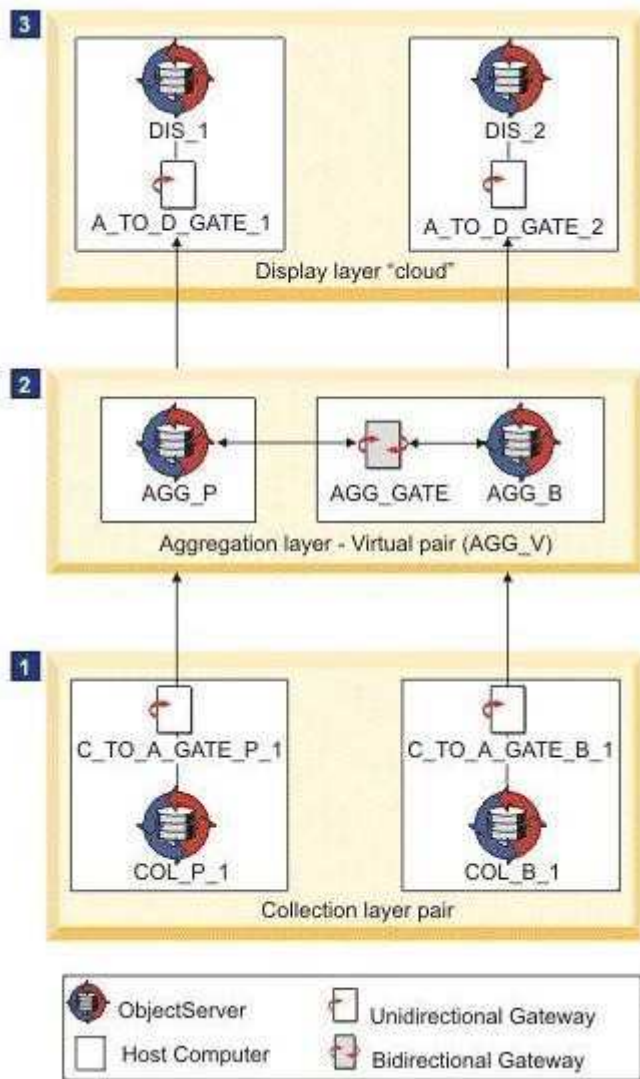

Widgetcom has deployed this 3-tier standard multi-tier architecture deployment of IBM Tivoli Netcool/OMNIBus V7.4 (Netcool/OMNIBus) using the best practice configuration that ships with the product. When implementing automatic load balancing for Native Event List clients in this environment, which ObjectServer names must be added to the master servergroups table?

- A. DIS_1 and DIS_2
- B. AGG_P and AGG_B
- C. DIS_1, DIS_2, and AGG_V
- D. DIS_1, DIS_2, AGG_P, and AGG_B

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

Topic 2, Volume B

QUESTION 57

Which file can be modified to ensure that the proxy server is configured in the interfaces?

- A. omni.dat
- B. NCOMS.props
- C. NCO_PROXY.props
- D. interfaces <architecture>

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 58

What is the correct path for upgrading from WebGUI V7.3.1 running TIP V2.1 to WebGUI V7.4?

- A. It is not possible to run an upgrade from WebGUI V7.3.1 to the V7.4 release.
- B. Run an in-place upgrade of WebGUI V7.3.1 using the WebGUI V7.4 installer.
- C. Upgrade TIP V2.1 using the TIP V2.2.0.1 feature pack. Then run an in-place upgrade of WebGUI V7.3.1 using the WebGUI V7.4 installer.
- D. Run an in-place upgrade of WebGUI V7.3.1 using the WebGUI V7.4 installer. Then upgrade the TIP V2.1 using the TIPV2.2.0.1 feature pack.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 59

The WAAPI host, port, username, password is configured in which file?

- A. \$NCHOME/omnibus_webgui/etc/waapi.init
- B. \$NCHOME/omnibus_webgui/etc/server.init
- C. \$NCHOME/omnibus_webgui/waapi/etc/waapi.init
- D. \$NCHOME/omnibus_webgui/waapi/etc/server.init

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 60

A company has a virtual pair of ObjectServers with the primary located in New York (ny.fqdn.com 4100), the backup in Sacramento (sac.fqdn.com 4100), and the WebGUI is in San Francisco (sf.fqdn.com 16311). The administrator has these requirements:

The administrator has created the SmartPage in

<TIPHOME>/profiles/TIPProfile/installedApps/TIPCell/isc.ear/OMNIBusWebGUI war/SmartPages/index.html.

How would the page be accessed using a browser?

- A. <https://sf.fqdn.com:16311/ibm/console/index.html>
- B. <https://sf.fqdn.com:16311/ibm/console/webtop/index.html>
- C. <https://sf.fqdn.com:16311/ibm/console/webgui/SmartPages/index.html>
- D. <https://sf.fqdn.com:16311/ibm/console/webtop/SmartPages/index.html>

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 61

What must be done to the IBM Tivoli Netcool/OMNIBus ObjectServer to enable FIPS 140 to be used within the deployment?

- A. no additional tasks are required for FIPS 140
- B. everything must be re-encrypted with nco_keygen
- C. everything must be re-encrypted with nco_g_crypt
- D. everything must be re-encrypted with nco_aes_crypt with the -140 option

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 62

Review this part of a rules file (line numbers added for troubleshooting)

```
[10] @Node=$node
[11] table dept={{ "node1","Technical"}, {"node2","Finance"}}
[12] @Department=lookup($node,dept)
```

When running a syntaxcheck this error is displayed:

```
2013-01-22T11:25:14: Debug: D-UNK-000-000: Plain text rules file detected.
2013-01-22T11:25:14: Debug: D-ETC-004-050: THREAD MGR: thread Request Thread (0x80d0c58) run
2013-01-22T11:25:14: Error: E-UNK-000-000: Rules file 'snmptrap.rules' line 11: parse error
2013-01-22T11:25:14: Debug: D-UNK-000-000: Rules file caching is disabled.
2013-01-22T11:25:14: Error: E-UNK-000-000: Error(s) in rules file
```

What is the cause of this error?

- A. Department is not a valid ObjectServer field.
- B. The lookup function needs an integer as key to the table.
- C. The lookup table definition must be set in the probe property file.
- D. Lookup table definitions must be located at the start of a rules file

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 63

An ObjectServer is being configured with High Availability The primary ObjectServer, called LONDON_P, is configured on servera The backup ObjectServer, called LONDON_B, is configured on serverb The synchronizer gateway, called LONDON_GATE, is installed on serverb Neither of the ObjectServers is running in Secure Mode

The goal is a configuration that implements ObjectServer failover and fallback in the most efficient manner and in accordance with standard Best Practices. What identifies how the ObjectServer property called BackupObjectServer is configured?

- A. The value of the property on LONDON_B is manually set to True.
- B. The value of the property on LONDON_P is manually set to LONDON_B.
- C. The value of the property on LONDON_B is automatically configured by LONDON_GATE
- D. The value of the property on LONDON_P is automatically configured by LONDON_GATE

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 64

A company has a virtual pair of ObjectServers with the primary located in London (emea.fqdn.com 4100), and the backup is in Perth (apac.fqdn.com 4100), while WebGUI is in San Francisco (usa fqdn com 16310)

The administrator runs this command

```
./confvm4ncos.sh root netcool emea.fqdn.com 4100 apac.fqdn.com 4100
```

This part of the command, confvmm4ncos.sh, updates the WebGUI ObjectServer connection details for what?

- A. for VMM
- B. for the datasource file
- C. for VMM and event data feed
- D. for load balancing in the initialization file

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 65

Which command installs the probes and gateways in IBM Tivoli Netcool/OMNIBus V7.4?

- A. nco_patch
- B. nco_install_obj
- C. nco_create_integration
- D. nco install integration

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 66

An installation of an ObjectServer on Redhat Linux has completed. The ObjectServer has been set up to use PAM authentication. What must be increased to keep nco_pad from crashing?

- A. the poolsize on the nco_pad command
- B. the stacksize on the nco_pad command
- C. the stackdump size on the nco_pad command
- D. the memory space of the parent process to at least 2 GB

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 67

Which two commands would correctly set the remote probe's NetworkTimeout property value to 100? (Choose two)

- A. `nco_setprobeprop -networktimeout 100 -host servername.ibm.com -port 5665`
- B. `nco_setprobeprop -networktimeout -value 100 -host servername.ibm.com -port 5665`
- C. `nco_setprobeprop -name NetworkTimeout -value 100 -host servername.ibm.com -port 5665`
- D. `nco_http -uri http://servername.ibm.com:5665/probe/common -datatype application/json -data '{ "NetworkTimeout": "100" }' -method patch`
- E. `nco_http -uri http://servername.ibm.com:5665/probe/common -datatype application/json -data '{ "properties": { "NetworkTimeout": "100" } }' -method patch`

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

Correct Answer: CE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 68

The optional nco_security section of a ProcessAgent config file is used for what?

- A. to list commands/binaries that the ProcessAgent will run from a remote request
- B. to configure a whitelist of all hosts that the ProcessAgent will accept incoming connections from
- C. to list usernames/passwords that are required for authentication connections to other Process Agents
- D. to configure how username/passwords are authenticated for incoming connections to that ProcessAgent

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 69

What is the purpose of the PA.Name property of the ObjectServer?

- A. to tell the ObjectServer the name of the ProcessAgent it was started by
- B. to provide the ObjectServer a list of ProcessAgent names it may accept incoming connections from
- C. to tell the ObjectServer the name of a single ProcessAgent to connect to in order to fire any external actions
- D. to provide the ObjectServer a list of ProcessAgent names it may try to connect to in order to fire any external actions

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 70

Which statement best describes one of the functions of the Messages tab in the Accelerated Event Notification (AEN) client property settings?

- A. It contains the settings used to configure the Launch In Context feature.
- B. It contains the user name and password used by the AEN client to connect to the ObjectServer.
- C. It contains the settings used to configure how many pop-up messages are displayed by the AEN client.
- D. It contains the settings used to configure which event columns appear in the pop-up message displayed by the AENclient.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 71

What does an HTTP GET return when run against the /probe/common URI of a running probe that has been configured for HTTP access?

- A. It returns a dump of the current rules file that the probe is currently running.
- B. It returns the current status information of the probe including version and properties information.
- C. It returns the results of doing a proxied HTTP GET to the device that the probe is monitoring (if applicable).
- D. It returns the current status of the device/service/logfile that the probe is monitoring including a list of current activealarms.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 72

When preparing an installation of the WebGUI on a new installation for IBM Tivoli Netcool/OMNIbus V7.4, what is the simplest form of installation to use LDAP for a user registry?

- A. Basic
- B. Custom
- C. Advanced
- D. install with Basic and customize the user registry after installation

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 73

What are three supported operating systems for installing and running IBM Tivoli Netcool/OMNIbus? (Choose three.)

- A. AIX6.2
- B. IRIX 6.5
- C. SunOS 4
- D. Solaris 10
- E. Windows 95
- F. Linux (on 64-bit hardware)

Correct Answer: ADF

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 74

Review the output from a rules file syntaxcheck:

...
2013-01-21T19:36:53: Information: I-UNK-000-000: Probe registered with 'NCOMS_P'.
2013-01-21T19:36:53: Error: E-UNK-000-000: Rules file 'snmptrap.rules' line 39: Field 'CustomerID' not found.
2013-01-21T19:36:53: Error: E-UNK-000-000: Failure during field validation check.
...

What is the cause of this error?

- A. CustomerD is not a valid parameter.
- B. CustomerD was not set properly in the rulesfile.
- C. The CustomerD field does not exist in the ObjectServer NCOMS_P.
- D. A call to an undefined variable CustomerD was made on line 39 in the rules file.

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 75

A company is deploying WebGUI worldwide and assessing their user and group requirements. These users will need access to WebGUI:

Which user roles are required within the IBM Tivoli Netcool/OMNIBus ObjectServer given these requirements?

- A. No ObjectServer user access is required.
- B. 17 users require the Normal role for write permission.
- C. 12 users require CatalogUser and AlertsUser roles for write permission.
- D. 17 users require CatalogUser and AlertsUser roles for write permission.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 76

A company has a requirement to archive events to their historical archive IBM DB2 database Which IBM Tivoli Netcool/OMNIBus gateway should be used for this purpose?

- A. JDBC
- B. Oracle
- C. IBMDB2 9.5
- D. IBMDB2 9.7

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 77

Which two options determine which ObjectServers a probe will make connections to? (Choose two.)

- A. the Agent probe property
- B. the Manager probe property
- C. the StoreAndForward probe property
- D. the Server and ServerBackup probe properties
- E. any registertarget() lines inside the probe rules files

Correct Answer: DE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 78

Which statement is true if an ObjectServer work time exceeds its granularity?

- A. The disk space should be increased.
- B. The overall end user experience will be improved.
- C. The ObjectServer is overloaded and may fall behind in some of its tasks.
- D. The probe is overloaded and a second probe should be deployed in peer-to-peer mode

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 79

An ObjectServer has been set up to create checkpoint files, and a utility is available to check the validity of the checkpoint files. Which command checks the files?

- A. nco_storepoint
- B. nco_check_file
- C. nco_checkpoint
- D. nco check_store

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 80

A company is deploying a multi-tiered architecture with collection, aggregation, and display layers. Which steps are required to create the primary and backup aggregation ObjectServers?

- A. Configure the omni.dat or Server Editor and generate the interfaces file for NCOMS_P, NCOMS_B and NCOMS_V. Run nco_dbinit with the -customconfigfile option to load the aggregation.sql and initialize the ObjectServer. Start the ObjectServers NCOMS_P and NCOMS_B.
- B. Configure the omni.dat or Server Editor and generate the interfaces file for AGG_P, AGG_B and AGG_V. Run nco_dbinit with the -customconfigfile option to load the aggregation.sql and initialize the

ObjectServer.Start the ObjectServers AGG_P and AGG_B.

- C. Configure the omni.dat or Server Editor and generate the interfaces file for NCOMS_P, NCOMS_B and NCOMS_V.Run nco_dbinit with the -customconfigfile option to load the primary.sql or backup.sql and initialize theObjectServer.Start the ObjectServers AGG_P and AGG_B
- D. Configure the omni.dat or Server Editor and generate the interfaces file for AGG_P, AGG_B and AGG_V.Run nco_dbinit with the -customconfigfile option to load the primary.sql or backup.sql and initialize the ObjectServerStart the ObjectServers AGG_P and AGG_B.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 81

Which two options must be set to have an Active Event List (AEL) window load instead of a browser window when an AEL is loaded from a monitor box from a SmartPage with an AELMAPVIEET command and have the minimized window icon blink when there is a change in the events? (Choose two.)

- A. flashing is enabled in AEL Preferences
- B. set the AEL to open in full screen mode
- C. URLTargetin AEL should be set to _blank
- D. showinframe is set to true in theAELMAPVIEETcommand
- E. notification is enabled to always notify in AEL Preferences

Correct Answer: DE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 82

Information needs to be logged to an ObjectServer log file each time a trigger fires. Which command would be used in the trigger to log the specific information?

- A. LOG INTO
- B. WRITE INTO
- C. PRINT INTO
- D. DESCRIBE INTO

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 83

Which two commands can be used to correctly set the NCHOME environmental variable? (Choose two.)

- A. echo NCHOME=/opt/IBM/tivoli
- B. export NCHOME=/opt/IBM/tivoli
- C. set NCHOME=C:\opt\ibm\tivoli\netcool

- D. unset NCHOME=C:\opt\ibm\tivoli\netcool
- E. which NCHOME=C:\opt\ibm\tivoli\netcool

Correct Answer: BC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 84

The command `nco_store_resize -newhardlimit 500mb` changes which hard limit to 500MB?

- A. the memstoreoftheNCOMS ObjectServer
- B. the memory footprint of any OMNIBus process
- C. the amount of memory available to probe buffering
- D. the amount of disk space available for the IBM Tivoli Netcool/OMNIBus installation

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 85

A company is deploying a multitiered architecture

Aggregation layer ObjectServers AGG_P and AGG_B have been created Collection layer ObjectServers

COL_P_1 and COL_B_1 have also been created Two display layer ObjectServer need to be created Which steps should be taken to create the display ObjectServers?

- A. Configure the omni.dat or Server Editor and generate the interfaces file for primary ObjectServer DIS_P and backupObjectServer DIS_B.Start the ObjectServers DIS_P and DIS_B.
- B. Configure the omni.dat or Server Editor and generate the interfaces file for DIS_1, and DIS_2.Run `nco_dbinit` with the `-customconfigfile` option to load the display.sql and initialize the ObjectServer.Start the ObjectServers DIS_1 and DIS_2.
- C. Configure the omni.dat or Server Editor and generate the interfaces file for primary ObjectServer DIS_P and BackupObjectServer DIS_B.Run `nco_dbinit` with the `-customconfigfile` option to load the display.sql and initialize the ObjectServer.Start the ObjectServers DIS_P and DIS_B.
- D. Configure the omni.dat or Server Editor and generate the interfaces file for primary ObjectServer DIS_P and BackupObjectServer DIS_B.Run `nco_dbinit` with the `-customconfigfile` option to load the desktop.sql and initialize the ObjectServer.Start the ObjectServers DIS_P and DIS_B.

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 86

Which command creates a new dual desktop display ObjectServer with the server name as DISPLAY_OS_1 connecting to AGG_OS_1 ObjectServer?

- A. `$NCHOME/bin/nco_dbinit -server DISPLAY_OS_1 -desktopserver -dsddualwrite -dsdprimary AGG_OS_1`
- B. `$NCHOME/omnibus/bin/nco_igen -server DISPLAY_OS_1 -desktopserver -dsddualwrite -dsdprimary AGG_OS_1`
- C. `$NCHOME/omnibus/bin/nco_dbinit -server DISPLAY_OS_1 -desktopserver -dsddualwrite -dsdprimary AGG_OS_1`
- D. `$NCHOME/omnibus/install/nco_dbinit -server DISPLAY_OS_1 -desktopserver -dsddualwrite -dsdprimary AGG_OS_1`

- A. Option A
- B. Option B
- C. Option C
- D. Option D

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 87

IBM Tivoli Netcool/OMNIBus V7 4 core components are being installed on a server running 64-bit SUSE Linux. The server hardware consists of 8 CPUs (2.4 GHz), 16 GB RAM, and 2500 GB disks. The software will be installed using the Typical installation option Which statement is true about system hardware requirements?

- A. This system must have additional disk space to accommodate log files.
- B. The hardware on this system is adequate for most small to medium deployments.
- C. This system must have additional RAM to support the larger ObjectServer memory capable with 64- bit support
- D. This system must have additional disk space dedicated to the /tmp directory that is required during installation

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 88

Which properties must be available in the probe to configure peer-to-peer failover?

- A. Server, Mode, AutoSAF
- B. Mode, PeerHost, PeerPort
- C. Server, Connections, ServerBackup
- D. Server, ServerBackup, PeerHost, PeerPort

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 89

When configuring a Backup ObjectServer, what are the default property values for ActingPrimary and BackupObjectServer?

- A. ActingPrimary is TRUE and BackupObjectServer TRUE
- B. ActingPrimary is TRUE and BackupObjectServer FALSE
- C. ActingPrimary is FALSE and BackupObjectServer TRUE
- D. ActingPrimary is FALSE and BackupObjectServer FALSE

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 90

When upgrading probes, what does the UPGRADE.SH script do?

- A. It overwrites the probe older versions with the latest versions.
- B. It migrates probes data to the \$NCHOME/omni bus/probes/mi grated directory.
- C. It configures the probe files (rules and props) with the latest available information.
- D. It reinstalls the probes and migrates data to the \$NCHOME/omni bus/probes/mi grated directory

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 91

The design document is being written for an IBM Tivoli Netcool/OMNIBus installation in a failover architecture, and software components must be mapped to server hosts In the design, the primary ObjectServer will be installed on SERVER_A and the backup ObjectServer will be installed on SERVER_B. A bi-directional gateway will be used to synchronize data between the ObjectServers. How should the bi-directional gateway component be designed?

- A. The gateway should be on SERVER_A.
- B. The gateway should be on SERVER_B.
- C. The gateway reader should be on SERVER_A and gateway writer on SERVER_B
- D. The gateway writer should be on SERVER_A and gateway reader on SERVER_B

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 92

Which combination of properties can be used to enable an ObjectServer to serve files to a HTTP client?

- A. NHttpd.EnableHTTP, NHttpd.ListeningPort, NHttpd.SSLEnable, NHttpd.SSLListeningPort
- B. NHttpd.DocumentRoot, NHttpd.EnableFileServing, NHttpd.AccessLog, NHttpd.EnableHTTP
- C. NHttpd.EnableHTTP, NHttpd.ListeningPort, NHttpd.DocumentRoot, NHttpd.EnableFileServing
- D. NHttpd.AuthenticationDomain, NHttpd.SSLCertificate, NHttpd.DocumentRoot, NHttpd.EnableFileServing

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 93

Which two tools are used to encrypt properties in property files? (Choose two)

- A. nc_gskcmd
- B. nco_gcrypt
- C. nco_keyman
- D. nco_aes_crypt
- E. nco_setprobeprop

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 94

After a system reboot, WebGUI users are unable to log in and they are certain of their login credentials. No known configuration changes were made prior to the reboot. Tivoli Integrated Portal and the user repository share the same server.

SystemOut log shows this information:

```
[1/23/13 9:32:54:373 CST] 0000004d exception    E com.ibm.tivoli.tip.vmm4ncos.ObjectServerAdapter lo
CWWIM4529E The password verification for the 'netcool' principal name failed. Root cause: 'JZ006: Caught
IOException: com.sybase.jdbc3.jdbc.SybConnectionDeadException: JZ0C0: Connection is already closed
[1/23/13 9:32:54:374 CST] 0000004d exception    E com.ibm.tivoli.tip.vmm4ncos.ObjectServerAdapter lo
com.ibm.websphere.wim.exception.WIMApplicationException: CWWIM4529E The pas
verification for the 'netcool' principal name failed. Root cause: 'JZ006: Caught IOException:
com.sybase.jdbc3.jdbc.SybConnectionDeadException: JZ0C0: Connection is already closed.'
```

...

```
[1/23/13 9:32:54:382 CST] 0000004d LTPAServerObj E SECJ0369E: Authentication failed when using L
exception is <null>.
[1/23/13 9:32:54:383 CST] 0000004d FormLoginExtE SECJ0118E: Authentication error during authent
user netcool
```

Considering all the exceptions, what is the problem?

- A. user netcool is disabled
- B. availability of the user repository
- C. duplicated usernames in the repository
- D. general performance of the LDAP server

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 95

Which command line tool does the WebGUI administrator use to export and import portal data?

- A. export.sh
- B. tipcli.sh
- C. run_waapi
- D. webportal.bin

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 96

Click the Exhibit button.

After performing stress testing on the new IBM Tivoli Netcool/OMNIBus V7.4 (Netcool/OMNIBus) single tier deployment, the Netcool/OMNIBus administrator notices the combined average profiling and trigger statistics log file data shows that the primary aggregation ObjectServer AGG_P is using 50 seconds on average out of its 60 second granularity cycle

On further inspection of the log files, the administrator sees that the grouped user profile PROBE is the biggest consumer using just over 30 seconds of the 60 second granularity Which two actions help decrease the load by this user profile group? (Choose two)

- A. delete the contents of the alerts.details table
- B. deploy further probes to share the load of the incoming event stream
- C. review the events and implement event discards of unwanted events within the probe rules file
- D. deploy a Display layer using the standard multi-tier architecture configuration and move the probes to the Display layer
- E. deploy a Collection layer using the standard multi-tier architecture configuration and move the probes to the Collection layer

Correct Answer: CE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 97

Which action informs an end user when an event flood situation is detected?

- A. create a new severity level for the event flood situation
- B. configure the probe rules file so that deduplication of events does not occur
- C. configure a probe to report back the situation in the summary field for an event raised when the event flood is detected
- D. implement Accelerated Event Notification to ensure that the detected event flood situation is displayed to operators as quickly as possible

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 98

What are wires used for when developing a custom set of pages in the WebGUI portal?

- A. to link portlets in different workspaces
- B. to create a link to publish content from one page to another
- C. to route or connect client-side events between source and target portlets
- D. to allow the communication of information between two different users using the same custom portal page

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 99

This line is added to the journal tab of a WebGUI tool:

Alert severity is CONVERSION(@Severity)

Assuming the tool is executed on a red event, what will appear in the Journal tab of the event this tool is run against?

- A. Alert severity is 4
- B. Alert severity is 5
- C. Alert severity is Critical
- D. Alert severity is Warning

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 100

An ObjectServer trigger is configured to locate all critical events related to a very important network component. The trigger generates an event-based Accelerated Event Notification (AEN) The AEN message is sent to all users that are members of the NETWORK group. The trigger updates the event so that it will not send another AEN message for the same event.

When the trigger runs and generates the AEN message there are no users that belong to the NETWORK group that have an active AEN client running on their desktops. What happens to the AEN message in this situation?

- A. With no active clients to receive the message, the message is lost.
- B. Any user who has their AEN client configured with the Notification Logging option set can retrieve the text of all messages from their local log file.
- C. Any user who has their AEN client configured with the Maintain History option set can start their AEN client and retrieve all messages that have not been received by them.
- D. The ObjectServer sending the AEN message requires an acknowledgement from at least one AEN client that the message has been received. Otherwise, it will retransmit the message based upon the Granularity setting.

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 101

The administrator wants to give a new user the ability to manage groups and roles in IBM Tivoli Netcool/OMNIbus V7.4 WebGUI. Which role would that user need to have?

- A. ncw_user
- B. iscadmins
- C. ncw_admin
- D. administrator

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 102

Which two keywords are required for creating an SQL procedure? (Choose two)

- A. END
- B. WHEN
- C. BEGIN
- D. START
- E. DECLARE

Correct Answer: AC

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 103

Which indexes exist on the ObjectServer alerts.status table by default?

- A. one index consisting of the primary key Serial

- B. two indexes; one consisting of Node and one consisting of Serial
- C. one index consisting of the primary key ServerName and ServerSerial
- D. two indexes; one consisting of the Serial and one consisting of the primary key ServerName and ServerSerial

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 104

An executable tool is created for use through the native desktop. The tool runs a .bat file that performs a ping command on Windows desktops. The tool is created but does not work. What describes the correct technique for diagnosing the problem with this tool?

- A. examine the ObjectServer log file for possible syntax issues in the .bat file
- B. examine the local Windows application log file for possible issues in the .bat file
- C. configure the Redirect errors option in the tool to display any errors in a pop-up window
- D. configure the Redirect messages option in the tool to display any errors in a pop-up window

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 105

Which statement is true about a temporal trigger?

- A. It responds to changes detected within the ObjectServer.
- B. It is executed repeatedly based on a specified frequency.
- C. It can only be executed if the system is running under process control.
- D. It can only be executed before or after an event is updated in the ObjectServer

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 106

Which three configuration parameters are set in the \$NCHOME/omnibus_webgui/etc/datasources/ncwDataSourceDefinitions.xml file? (Choose three.)

- A. datasource filters
- B. timeoutfor query statements
- C. datasource connection details
- D. HTTP and HTTPS port for the WebGUI
- E. username and password for the datasource(s)
- F. username and password for WebGUI admin user

Correct Answer: BCE

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 107

Which two statements are true about automations? (Choose two.)

- A. Automations can communicate with each other and run programs on request.
- B. Automations support full remote management of process agents from a single console.
- C. Automations enable the ObjectServer to process alerts without requiring an operator to take action.
- D. Automations can be used to detect changes in the ObjectServer and to run automated responses to these changes.
- E. Automations provide an interface for defining and manipulating relational database objects such as tables and views

Correct Answer: CD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 108

Click the Exhibit button

Widgetcom has deployed this 3-tier standard multi-tier architecture deployment of IBM Tivoli Netcool/OMNIBus V7.4 (Netcool/OMNIBus) using the best practice configuration that ships with the product:

WebGUI is to be deployed into the environment. The Aggregation and Display layer ObjectServer details are added to the WebGUI server's data source definition file as a single data source In order to implement automatic load-balancing for connecting WebGUI Active Event List clients, into which ObjectServer table should rows be inserted?

- A. master.national
- B. master.servergroups
- C. catalog.servergroups
- D. no rows need to be added to any ObjectServer table

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 109

An ObjectServer is being configured with High Availability The primary ObjectServer, called LONDON_P, is configured on servera The backup ObjectServer, called LONDON_B, is configured on serverb The synchronizer gateway, called LONDON_GATE, is installed on serverb Neither of the ObjectServers is running in Secure Mode The goal is a configuration that implements ObjectServer failover and fallback in the most efficient manner and in accordance with standard Best Practices.

Which statement correctly describes the use of the ObjectServer property called BackupObjectServer?

- A. The value of this property on LONDON_B must be set to True.
- B. The value of this property on LONDON_P must be set to True.
- C. The value of this property on LONDON_B must be set to LONDON_P
- D. The value of this property on LONDON_P must be set to LONDON_B

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 110

The network operation center has two groups of users that use the native desktop. One group, OPERATIONS, requires access to the standard event management tools like acknowledge and delete. They also require access to some custom tools for things like basic troubleshooting (ping and telnet) and ticket creation. The second group, NETWORK, requires access to the same tools used by the OPERATIONS group users. In addition, there are a few tools used for advanced router diagnostics that they use. These tools are not to be available to the OPERATIONS group users. To minimize administration efforts a common desktop menu is used for both groups of users.

The users in the OPERATIONS group use Windows desktops to run the native desktop application. What is the technique used to ensure that they only run tools supported on Windows?

- A. no additional configuration is required
- B. the OPERATIONS group is configured to limit access to only those tools supported on Windows
- C. all of the tools used by the OPERATIONS group are configured to limit access to only Windows systems
- D. all of the menus used by the OPERATIONS group are configured to limit access to only Windows systems

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 111

What is the default location of the localization configuration file on a Linux host?

- A. \$NCHOME/etc
- B. \$NCHOME/etc/locale
- C. \$NCHOME/etc/default
- D. \$NCHOME/etc/platform

Correct Answer: A

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 112

An IBM Tivoli Netcool/OMNIBus V7.4 (Netcool/OMNIBus) environment has been set up with failover ObjectServers. Two custom columns will be added to the event list to show Service Desk Ticket numbers and Ticket Status. Which steps must be taken in this Netcool/OMNIBus environment?

- A. add the columns to the alerts.details table on the primary, modify the Gateway .map file, and restart the ObjectServer
- B. add the columns to the alerts.status table on the primary and backup, modify the Gateway .map file, and restart the gateway
- C. add the columns to the alerts.status table on the primary and backup, modify the Gateway .props file, and restart the gateway
- D. add the columns to the alerts .ticket table on the primary and backup, modify the Gateway .props file, and restart the ObjectServer

Correct Answer: B

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 113

Which scripts are used to back up and restore DE in a UNIX or Linux environments without an X server?

- A. backupdb.sh, restoredb
- B. backupde.sh, restorede.sh
- C. de_backupdb, de_restoredb
- D. de_dbbackup.sh, de_dbrestore.sh

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 114

A company is deploying a multi-tiered architecture with two collection layer ObjectServers, two aggregation layer ObjectServers, and two display layer ObjectServers. Which ObjectServer names should be added to the omni.dat or Server Editor to configure server communication information?

- A. There is no specific naming convention for the multi-tiered architecture.
- B. COL_P, COL_B, COL_V, AGG_P, AGG_B, AGG_V, DIS_P and DIS_B.
- C. COL_P_1, COL_B_1, COL_V_1, AGG_P, AGG_B, AGG_V, DIS_1 and DIS_2.
- D. COL_P, COL_B, COL_V, NCOMS_P, NCOMS_B, NCOMS_V, DIS_1 and DIS_2

Correct Answer: C

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 115

The IBM Prerequisite Scanner Utility uses product codes to determine host component prerequisites. Which code checks the host for the prerequisites of IBM Tivoli Netcool/OMNIBus Server components?

- A. NOP
- B. NOC
- C. NOS

D. NCOMS

Correct Answer: C

Section: (none)


Explanation

Explanation/Reference:

Explanation:

QUESTION 116

Click the Exhibit button.

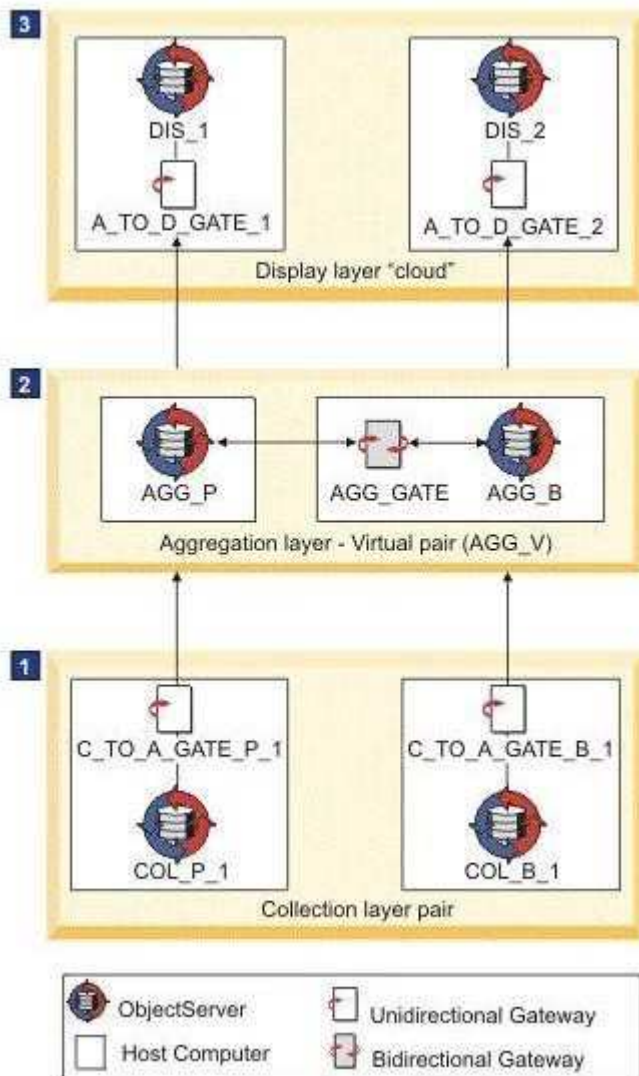

Widgetcom has deployed this 3-tier standard multi-tier architecture deployment of IBM Tivoli Netcool/OMNIBus V7.4 (Netcool/OMNIBus) using the best practice configuration that ships with the product:

The Netcool/OMNIBus administrator wants to examine the contents of a custom table on both AGG_P and AGG_B to verify that data is flowing correctly between the primary and backup Aggregation ObjectServers. Which two commands can be used to examine the contents of this table? (Choose two)

- A. nco_id
- B. nco_sql

- C. nco_event
- D. nco_config
- E. nco_check_store

Correct Answer: BD

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 117

Which utility can be used to export ObjectServer event data?

- A. ws_ant.sh
- B. nco_export
- C. nco_confpack
- D. nco osreport

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:

QUESTION 118

When is it appropriate to use iKeyman?

- A. when running in non_AES mode
- B. when running in FIPS 140-2 mode
- C. when a graphical tool cannot be used
- D. when not running in FIPS 140-2 mode

Correct Answer: D

Section: (none)

Explanation

Explanation/Reference:

Explanation:



<http://www.gratisexam.com/>